

Kίρκη Version 2.0:
Beam Spectra for Simulating Linear Collider
Physics

Thorsten Ohl*

Institute for Theoretical Physics and Astrophysics
Würzburg University
Campus Hubland Nord
Emil-Hilb-Weg 22
97074 Würzburg
Germany

June 2014

DRAFT: 03/03/2026, 07:30

Abstract

...

*e-mail: ohl@physik.uni-wuerzburg.de

Caveat

This manual is outdated and describes the old Fortran77 interface. This interface has been replaced by a similar, but thoroughly modern Fortran 2003 interface.

Also the new smoothing feature of `circe2_tool` is not described here.

Please see the annotated template and other files in `share/examples/` for a starting point for rolling your own beam descriptions.

Program Summary:

- **Title of program:** *Κίρκη*, Version 2.0 (June 2014)
- **Program obtainable from**
<http://www.hepforge.org/downloads/whizard>.
- **Licensing provisions:** Free software under the GNU General Public License.
- **Programming languages used:** Fortran, OCaml[8] (available from <http://caml.inria.fr/ocaml> and <http://ocaml.org>).
- **Number of program lines in distributed program** \approx ??? lines of Fortran (excluding comments) for the library; \approx ??? lines of OCaml for the utility program
- **Computer/Operating System:** Any with a Fortran programming environment.
- **Memory required to execute with typical data:** Negligible on the scale of typical applications calling the library.
- **Typical running time:** A negligible fraction of the running time of applications calling the library.
- **Purpose of program:** Provide efficient, realistic and reproducible parameterizations of the correlated e^\pm - and γ -beam spectra for linear colliders and photon colliders.
- **Nature of physical problem:** The intricate beam dynamics in the interaction region of a high luminosity linear collider at $\sqrt{s} = 500\text{GeV}$ result in non-trivial energy spectra of the scattering electrons, positrons and photons. Physics simulations require efficient, reproducible, realistic and easy-to-use parameterizations of these spectra.
- **Method of solution:** Parameterization, curve fitting, adaptive sampling, Monte Carlo event generation.
- **Keywords:** Event generation, beamstrahlung, linear colliders, photon colliders.

Contents

1	Introduction	8
1.1	Notes on the Implementation	9
1.2	Overview	10
2	Physics	10
2.1	Polarization Averaged Distributions	11
2.2	Helicity Distributions	11
3	API	13
3.1	Initialization	14
3.2	Luminosities	16
3.3	Sampling and Event Generation	17
3.3.1	Extensions: General Polarizations	18
3.4	Distributions	19
3.4.1	Extensions: General Polarizations	20
3.5	Private Parts	21
4	Examples	21
4.1	Unweighted Event Generation	22
4.1.1	Mixed Flavors and Helicities	22
4.1.2	Separated Flavors and Helicities	23
4.1.3	Polarization Averaged	24
4.1.4	Flavors and Helicity Projections	24
4.2	Distributions and Weighted Event Generation	26
4.3	Scans and Interpolations	28
5	Algorithms	29
5.1	Histograms	30
5.2	Coordinate Dependence of Sampling Distributions	31
5.3	Sampling Distributions With Integrable Singularities	31
5.4	Piecewise Differentiable Maps	32
5.4.1	Powers	33
5.4.2	Identity	34
5.4.3	Null	35
5.4.4	Resonances	35
5.4.5	Patching Up	35

6	Preparing Beam Descriptions with circe2_tool	36
6.1	circe2_tool Files	36
6.1.1	Per File Options	36
6.1.2	Per Design Options	37
6.1.3	Per Channel Options	37
6.2	circe2_tool Demonstration	39
6.3	More circe2_tool Examples	43
7	On the Implementation of circe2_tool	43
7.1	Divisions	43
7.2	Differentiable Maps	45
7.3	Polydivisions	45
7.4	Grids	45
8	The Next Generation	45
8.1	Variable # of Bins	46
8.2	Adapting Maps Per-Cell	47
8.3	Non-Factorized Polygrids	48
9	Conclusions	48
10	Implementation of circe2	49
11	Data	50
11.1	Channels	53
11.2	Maps	54
12	Random Number Generation	54
13	Event Generation	54
14	Channel selection	58
15	Luminosity	60
16	2D-Distribution	60
17	Reading Files	63
17.1	Auxiliary Code For Reading Files	67

A	Tests and Examples	69
A.1	Object-Oriented interface to <code>tao_random_numbers</code>	69
A.2	<code>circe2_generate</code> : Standalone Generation of Samples	70
A.3	<code>circe2_ls</code> : Listing File Contents	72
A.4	β -distributions	74
A.5	Sampling	78
A.6	Moments	79
A.6.1	Moments of β -distributions	81
A.6.2	Channels	82
A.6.3	Selftest	83
A.6.4	Generate Sample	87
A.6.5	List Moments	87
A.6.6	Check Generator	88
A.7	<code>circe2_moments</code> : Compare Moments of distributions	90
B	Making Grids	92
B.1	Interface of <i>Float</i>	92
B.2	Implementation of <i>Float</i>	92
B.3	Interface of <i>ThoArray</i>	95
B.4	Implementation of <i>ThoArray</i>	96
B.5	Interface of <i>ThoMatrix</i>	98
B.6	Implementation of <i>ThoMatrix</i>	99
B.7	Interface of <i>Filter</i>	100
B.8	Implementation of <i>Filter</i>	100
B.9	Interface of <i>Diffmap</i>	104
B.10	Testing Real Maps	106
B.11	Specific Real Maps	106
B.12	Implementation of <i>Diffmap</i>	108
B.13	Testing Real Maps	108
B.14	Specific Real Maps	110
B.15	Interface of <i>Diffmaps</i>	119
B.16	Combined Differentiable Maps	119
B.17	Implementation of <i>Diffmaps</i>	119
B.18	Interface of <i>Division</i>	122
B.18.1	Primary Divisions	123
B.18.2	Polydivisions	124
B.19	Implementation of <i>Division</i>	124
B.19.1	Primary Divisions	126
B.19.2	Polydivisions	130
B.20	Interface of <i>Grid</i>	136
B.21	Implementation of <i>Grid</i>	138

B.22 Interface of <i>Events</i>	149
B.23 Implementation of <i>Events</i>	149
B.23.1 Reading Bigarrays	149
B.24 Interface of <i>Syntax</i>	153
B.25 Abstract Syntax and Default Values	153
B.26 Implementation of <i>Syntax</i>	156
B.27 Interface of <i>Commands</i>	167
B.28 Implementation of <i>Commands</i>	168
B.28.1 Processing	168
B.29 Interface of <i>Histogram</i>	169
B.30 Implementation of <i>Histogram</i>	169
B.31 Naive Linear Regression	172
B.32 Implementation of <i>Circe2_tool</i>	174
B.32.1 Large Numeric File I/O	174
B.32.2 Histogramming	175
B.32.3 Moments	177
B.32.4 Regression	178
B.32.5 Visually Adapting Powermaps	179
B.32.6 Testing	180
B.32.7 Main Program	181

1 Introduction

The expeditious construction of a high-energy, high-luminosity e^+e^- Linear Collider (LC) to complement the Large Hadron Collider (LHC) has been identified as the next world wide project for High Energy Physics (HEP). The dynamics of the dense colliding beams providing the high luminosities required by such a facility is highly non-trivial and detailed simulations have to be performed to predict the energy spectra provided by these beams. The microscopic simulations of the beam dynamics require too much computer time and memory for direct use in physics programs. Nevertheless, the results of such simulations have to be available as input for physics studies, since these spectra affect the sensitivity of experiments for the search for deviations from the standard model and to new physics.

Kίρκη Version 1.x (**circe1** for short) [1] has become a de-facto standard for inclusion of realistic energy spectra of TeV-scale e^+e^- LCs in physics calculations and event generators. It is supported by the major multi purpose event generators [2, 3] and has been used in many dedicated analyses. *Kίρκη* provides a fast, concise and convenient parameterization of the results of such simulations.

circe1 assumed strictly factorized distributions with a very restricted functional form (see [1] for details). This approach was sufficient for exploratory studies of physics at TeV-scale e^+e^- LCs. Future studies of physics at e^+e^- LCs will require a more detailed description and the estimation of non-factorized contributions. In particular, all distributions at laser backscattering $\gamma\gamma$ colliders [4] and at multi-TeV e^+e^- LCs are correlated and can not be approximated by **circe1** at all. In addition, the proliferation of accelerator designs since the release of **circe1** has make the maintenance of parameterizations as FORTRAN77 BLOCK DATA unwieldy.

Kίρκη Version 2.0 (**circe2** for short) successfully addresses these shortcomings of **circe1**, as can be seen in figure 1. It should be noted that the large z region and the blown-up $z \rightarrow 0$ region are taken from the *same* pair of datasets. In section 6.2 below, figures 3 to 9 demonstrate the interplay of **circe2**'s features. The algorithms implemented¹ in **circe2** should suffice for all studies until e^+e^- LCs and photon colliders come on-line and probably beyond. The implementation **circe2** bears no resemblance at all with the implementation of **circe1**.

circe2 describes the distributions by two-dimensional grids that are optimized using an algorithm derived from VEGAS [5]. The implementation was

¹A small number of well defined extensions that has have not been implemented yet are identified in section 3 below.



Figure 1: Comparison of a simulated realistic $\gamma\gamma$ luminosity spectrum (helicities: $(+, +)$) for a 500 GeV photon collider at TESLA [7] (filled area) with its `circe2` parameterization (solid line) using 50 bins in both directions. The 10^4 -fold blow-up of the $z \rightarrow 0$ region is taken from the same pair of datasets as the plot including the large z region.

modeled on the implementation in VAMP [6], but changes were required for sampling static event sets instead of distributions given as functions. The problem solved by `circe2` is rather different from the Monte Carlo integration with importance or stratified sampling that is the focus of VEGAS and VAMP. In the case of VEGAS/VAMP the function is given as a mathematical function, either analytically or numerically. In this case, while the adapted grid is being refined, resources can be invested for studying the function more closely in problematic regions. `circe2` does not have this luxury, because it must reconstruct (“*guess*”) a function from a *fixed* and *finite* sample. Therefore it cannot avoid to introduce biases, either through a fixed global functional form (as in `circe1`) through step functions (histograms). `circe2` combines the two approaches and uses automatically adapted histograms mapped by a patchwork of functions.

1.1 Notes on the Implementation

The FORTRAN77 library is extremely simple (about 800 lines) and performs only two tasks: one small set of subroutines efficiently generates pairs of random numbers distributed according to two dimensional histograms with factorized non-uniform bins stored in a file. A second set of functions calculates the value of the corresponding distributions.

FORTTRAN77 has been chosen solely for practical reasons: at the time of writing, the majority of programs expected to use the `circe2` are legacy applications written in FORTRAN77. The simple functionality of the FORTRAN77 library can however be reproduced trivially in any other programming language that will be needed in the future.

The non-trivial part of constructing an optimized histogram from an arbitrary distribution is performed by a utility program `circe2_tool` written in Objective Caml [8] (or O’Caml for short). O’Caml is available as Free Software for almost all computers and operating systems currently used in high energy physics. Bootstrapping the O’Caml compiler is straightforward and quick. Furthermore, parameterizations are distributed together with `circe2`, and most users will not even need to compile `circe2_tool`. Therefore there are no practical problems in using a modern programming language like O’Caml that allows—in the author’s experience—a both more rapid and safer development than FORTRAN77 or C++.

1.2 Overview

The remainder of this paper is organized as follows. For the benefit of users of the library, the Application Program Interface (API) is described immediately in section 3 after defining the notation in section 2. Section 4 shows some examples using the procedures described in section 3.

A description of the inner workings of `circe2` that is more detailed than required for using the library starts in section 5. An understanding of the algorithms employed is helpful for preparing beam descriptions using the program `circe2_tool` which is described in section 6. Details of the implementation of `circe2_tool` can be found in section 7, where also the benefits provided by modern functional programming languages for program organization in the large are discussed.

2 Physics

The customary parametrization of polarization in beam physics [9, 10] is in terms of density matrices for the leptons

$$\rho_{e^\pm}(\zeta) = \frac{1}{2} (1 + \zeta_i \sigma_i) \quad (1)$$

and the so-called Stokes’ parameters for photons

$$\rho_\gamma(\xi) = \frac{1}{2} (1 + \xi_i \sigma_i) \quad (2)$$

where the pseudo density matrix 2×2 -matrix ρ_γ for a pure polarization state ϵ_μ is given by

$$[\rho_\gamma]_{ij} = \langle (\epsilon \epsilon_i)(\epsilon^* e_j) \rangle \quad (3)$$

using two unit vectors $e_{1/2}$ orthogonal to the momentum. Keeping in mind the different interpretations of ζ and ξ , we will from now on unify the mathematical treatment and use the two interchangeably, since the correct interpretation will always be clear from the context. Using the notation $\sigma_0 = 1$, the joint polarization density matrix for two colliding particles can be written

$$\rho(\chi) = \sum_{a,a'=0}^3 \frac{\chi_{aa'}}{4} \sigma_a \otimes \sigma_{a'} \quad (4)$$

with $\chi_{0,0} = \text{tr } \rho(\chi) = 1$. Averaging density matrices will in general lead to correlated density matrices, even if the density matrices that are being averaged are factorized or correspond to pure states.

The most complete description B of a pair of colliding beams is therefore provided by a probability density and a density matrix for each pair (x_1, x_2) of energy fractions:

$$\begin{aligned} B : [0, 1] \times [0, 1] &\rightarrow \mathbf{R}^+ \times M \\ (x_1, x_2) &\mapsto (D(x_1, x_2), \rho(x_1, x_2)) \end{aligned} \quad (5)$$

where $\rho(x_1, x_2)$ will conveniently be given using the parametrization (4). Sophisticated event generators can use $D(x_1, x_2)$ and $\rho(x_1, x_2)$ to account for all spin correlations with the on-shell transition matrix T

$$d\sigma = \int dx_1 \wedge dx_2 D(x_1, x_2) \text{tr} (P_\Omega T(x_1 x_2 s) \rho(x_1, x_2) T^\dagger(x_1 x_2 s)) \text{dLIPS} \quad (6)$$

2.1 Polarization Averaged Distributions

Physics applications that either ignore polarization (this is often not advisable, but can be a necessary compromise in some cases) or know that polarization will play no significant role can ignore the density matrix, which amounts to summing over all polarization states. If the microscopic simulations that have been used to obtain the distributions described by `circe2` do not keep track of polarization, 93% of disk space can be saved by supporting simplified interfaces that ignore polarization altogether.

2.2 Helicity Distributions

Between the extremes of polarization averaged distributions on one end and full correlated density matrices on the other end, there is one particularly

important case for typical applications, that deserves a dedicated implementation.

In the approximation of projecting on the subspace consisting of circular polarizations

$$\rho(\chi) = \frac{1}{4} (\chi_{0,0} \cdot 1 \otimes 1 + \chi_{0,3} \cdot 1 \otimes \sigma_3 + \chi_{3,0} \cdot \sigma_3 \otimes 1 + \chi_{3,3} \cdot \sigma_3 \otimes \sigma_3) \quad (7)$$

the density matrix can be rewritten as a convex combination of manifest projection operators build out of $\sigma_{\pm} = (1 \pm \sigma_3)/2$:

$$\rho(\chi) = \chi_{++} \cdot \sigma_+ \otimes \sigma_+ + \chi_{+-} \cdot \sigma_+ \otimes \sigma_- + \chi_{-+} \cdot \sigma_- \otimes \sigma_+ + \chi_{--} \cdot \sigma_- \otimes \sigma_- \quad (8)$$

The coefficients are given by

$$\chi_{++} = \frac{1}{4} (\chi_{0,0} + \chi_{0,3} + \chi_{3,0} + \chi_{3,3}) \geq 0 \quad (9a)$$

$$\chi_{+-} = \frac{1}{4} (\chi_{0,0} - \chi_{0,3} + \chi_{3,0} - \chi_{3,3}) \geq 0 \quad (9b)$$

$$\chi_{-+} = \frac{1}{4} (\chi_{0,0} + \chi_{0,3} - \chi_{3,0} - \chi_{3,3}) \geq 0 \quad (9c)$$

$$\chi_{--} = \frac{1}{4} (\chi_{0,0} - \chi_{0,3} - \chi_{3,0} + \chi_{3,3}) \geq 0 \quad (9d)$$

and satisfy

$$\chi_{++} + \chi_{+-} + \chi_{-+} + \chi_{--} = \text{tr } \rho(\chi) = 1 \quad (10)$$

Of course, the $\chi_{\epsilon_1 \epsilon_2}$ are recognized as the probabilities for finding a particular combination of helicities for particles moving along the $\pm \vec{e}_3$ direction and we can introduce partial probability distributions

$$D_{p_1 p_2}^{\epsilon_1 \epsilon_2}(x_1, x_2) = \chi_{\epsilon_1 \epsilon_2} \cdot D_{p_1 p_2}(x_1, x_2) \geq 0 \quad (11)$$

that are to be combined with the polarized cross sections

$$\frac{d\sigma}{d\Omega}(s) = \sum_{\epsilon_1, \epsilon_2 = \pm} \int dx_1 \wedge dx_2 D^{\epsilon_1 \epsilon_2}(x_1, x_2) \left(\frac{d\sigma}{d\Omega} \right)^{\epsilon_1 \epsilon_2}(x_1 x_2 s) \quad (12)$$

This case deserves special consideration because it is a good approximation for a majority of applications and, at the same time, it is the most general case that allows an interpretation as classical probabilities. The latter feature allows the preparation of separately tuned probability densities for all four helicity combinations. In practical applications this turns out to be useful because the power law behaviour of the extreme low energy tails turns out to have a mild polarization dependence.

load beam	from file	<code>cir2ld</code>	(p. 14)
distributions	luminosity	<code>cir2lm</code>	(p. 16)
	probability density	<code>cir2dn</code>	(p. 19)
	density matrix	<code>cir2dm</code>	(extension, p. 21)
event generation	flavors/helicities	<code>cir2ch</code>	(p. 17)
	(x_1, x_2)	<code>cir2gn</code>	(p. 17)
	general polarization	<code>cir2gp</code>	(extension, p. 19)
internal	current beam	<code>/cir2cm/</code>	(p. 21)
	beam data base	<code>cir2bd</code>	(optional, p. 21)
	(cont'd)	<code>/cir2cd/</code>	(optional, p. 21)

Table 1: Summary of all functions, procedures and comon blocks.

3 API

All floating point numbers in the interfaces are declared as `double precision`. In most applications, the accuracy provided by single precision floating point numbers is likely to suffice. However most application programs will use double precision floating point numbers anyway so the most convenient choice is to use double precision in the interfaces as well.

In all interfaces, the integer particle codes follow the conventions of the Particle Data Group [11]. In particular

`p = 11`: electrons

`p = -11`: positrons

`p = 22`: photons

while other particles are unlikely to appear in the context of `circe2` before the design of μ -colliders enters a more concrete stage. Similarly, in all interfaces, the sign of the helicities are denoted by integers

`h = 1`: helicity +1 for photons or +1/2 for leptons (electrons and positrons)

`h = -1`: helicity -1 for photons or -1/2 for leptons (electrons and positrons)

As part of tis API, we also define a few extensions, which will be available in future versions, but have not been implemented yet. This allows application programs to anticipate these extensions.

3.1 Initialization

Before any of the event generation routines or the functions computing probability densities can be used, beam descriptions have to be loaded. This is accomplished by the routine `cir2ld` (mnemonic: *LoaD*), which must have been called at least once before any other procedure is invoked:

```
subroutine cir2ld (file, design, roots, ierror)
```

`character*(*) file` (input): name of a `circe2` parameter file in the format described in table 2. Conventions for filenames are system dependent and the names of files will consequently be installation dependent. This can not be avoided.

`character*(*) design` (input): name of the accelerator design. The name must not be longer than 72 characters. It is expected that design names follow the following naming scheme for e^+e^- LCs

TESLA: TESLA superconducting design (DESY)

XBAND: NLC/JLC X-band design (KEK, SLAC)

CLIC: CLIC two-beam design (CERN)

Special operating modes should be designated by a qualifier

/GG: laser backscattering $\gamma\gamma$ collider (e.g. 'TESLA/GG')

/GE: laser backscattering γe^- collider

/EE: e^-e^- collider

If there is more than one matching beam description, the *last* of them is used. If `design` contains a '*', only the characters *before* the '*' matter in the match. E.g.:

`design = 'TESLA'` matches only 'TESLA'

`design = 'TESLA*'` matches any of 'TESLA (Higgs factory)', 'TESLA (GigaZ)', 'TESLA', etc.

`design = '*'` matches everything and is a convenient shorthand for the case that there is only a single design per file

NB: '*' is not a real wildcard: everything after the first '*' is ignored.

`double precision roots` (input): \sqrt{s} /GeV of the accelerator. This must match within $\Delta\sqrt{s} = 1$ GeV. There is currently no facility for interpolation between fixed energy designs (see section 4.3, however).

`integer ierror` (input/output): if `ierror` > 0 on input, comments will be echoed to the standard output stream. On output, if no errors have been encountered `cir2ld` guarantees that `ierror` = 0. If `ierror` < 0, an error has occurred:

```

ierror = -1: file not found
ierror = -2: no match for design and  $\sqrt{s}$ 
ierror = -3: invalid format of parameter file
ierror = -4: parameter file too large

```

A typical application, assuming that a file named `photon_colliders.circe` contains beam descriptions for photon colliders (including TESLA/GG) is

```

integer ierror
...
ierror = 1
call cir2ld ('photon_colliders.circe', 'TESLA/GG', 500D0, ierror)
if (ierror .lt. 0)
  print *, 'error: cir2ld failed: ', ierror
  stop
end if
...

```

In order to allow application programs to be as independent from operating system dependent file naming conventions, the file formal has been designed so beam descriptions can be concatenated and application programs can hide file names from the user completely, as in

```

subroutine ldbeam (design, roots, ierror)
implicit none
character*(*) design
double precision roots
integer ierror
call cir2ld ('beam_descriptions.circe', design, roots, ierror)
if (ierror .eq. -1)
  print *, 'ldbeam: internal error: file not found'
  stop
end if
end

```

The other extreme uses one file per design and uses the '*' wildcard to make the `design` argument superfluous.

```
subroutine ldfile (name, roots, ierror)
implicit none
character*(*) name
double precision roots
integer ierror
call cir2ld (name, '*', roots, ierror)
end
```

Note that while it is in principle possible to use a data file intended for helicity states for polarization averaged distributions instead, no convenience procedures for this purpose are provided.

3.2 Luminosities

One of the results of the simulations that provide the input for `circe2` are the partial luminosities for all combinations of flavors and helicities. The luminosities for a combination of flavors and helicities can be inspected with the function `cir2lm` (*LuMinosity*). The return value is given in the convenient units

$$\text{fb}^{-1}v^{-1} = 10^{32}\text{cm}^{-2}\text{sec}^{-1} \quad (13)$$

where $v = 10^7 \text{ sec} \approx \text{year}/\pi$ is an “effective year” of running with about 30% up-time

```
double precision function cir2lm (p1, h1, p2, h2)

integer p1 (input): particle code for the first particle
integer h1 (input): helicity of the first particle
integer p2 (input): particle code for the second particle
integer h2 (input): helicity of the second particle
```

For the particle codes and helicities the special value 0 can be used to imply a sum over all flavors and helicities. E.g. the total luminosity is obtained with

```
lumi = cir2lm (0, 0, 0, 0)
```

and the $\gamma\gamma$ luminosity summed over all helicities

```
lumigg = cir2lm (22, 0, 22, 0)
```


3.3 Sampling and Event Generation

Given a combination of flavors and helicities, the routine `cir2gn` (*GeNerate*) can be called repeatedly to obtain a sample of pairs (x_1, x_2) distributed according to the currently loaded beam description:

```
subroutine cir2gn (p1, h1, p2, h2, x1, x2, rng)

  integer p1 (input): particle code for the first particle
  integer h1 (input): helicity of the first particle
  integer p2 (input): particle code for the second particle
  integer h2 (input): helicity of the second particle
  double precision x1 (output): fraction of the beam en-
    ergy carried by the first particle
  double precision x2 (output): fraction of the beam en-
    ergy carried by the second particle
  external rng: subroutine

    subroutine rng (u)
      double precision u
      u = ...
    end

    generating a uniform deviate, i.e. a random number uni-
    formly distributed in  $[0, 1]$ .
```

If the combination of flavors and helicities has zero luminosity for the selected accelerator design parameters, *no error code* is available (`x1` and `x2` are set to a very large negative value in this case). Applications should use `cir2lm` to test that the luminosity is non vanishing.

Instead of scanning the luminosities for all possible combinations of flavors and helicities, applications can call the procedure `cir2ch` (*CHannel*) which chooses a “channel” (a combination of flavors and helicities) for the currently loaded beam description with the relative probabilities given by the luminosities:

```
subroutine cir2ch (p1, h1, p2, h2, rng)

  integer p1 (output): particle code for the first particle
  integer h1 (output): helicity of the first particle
  integer p2 (output): particle code for the second particle
```

`integer h2` (output): helicity of the second particle
`external rng`: subroutine generating a uniform deviate (as above)

Many applications will use these two functions only in the combination

```
subroutine circe2 (p1, h1, p2, h2, x1, x2, rng)
integer p1, h1, p2, h2
double precision x1, x2
external rng
call cir2ch (p1, h1, p2, h2, rng)
call cir2gn (p1, h1, p2, h2, x1, x2, rng)
end
```

after which randomly distributed `p1`, `h1`, `p2`, `h2`, `x1`, and `x2` are available for further processing.

NB: a function like `circe2` has not been added to the default FORTRAN77 API, because `cir2gn` and `circe2` have the same number and types of arguments, differing only in the input/output direction of four of the arguments. This is a source of errors that a FORTRAN77 compiler can not help the application programmer to spot. The current design should be less error prone and is only minimally less convenient because of the additional procedure call

```
integer p1, h1, p2, h2
double precision x1, x2
integer n, nevent
external rng
...
do 10 n = 1, nevent
  call cir2ch (p1, h1, p2, h2, rng)
  call cir2gn (p1, h1, p2, h2, x1, x2, rng)
...
10 continue
...
```

Implementations in more modern programming languages (Fortran90/95, C++, Java, O'Caml, etc.) can and will provide a richer API with reduced name space pollution and danger of confusion.

3.3.1 Extensions: General Polarizations

Given a pair of flavors, triples (x_1, x_2, ρ) of momentum fractions together with density matrices for the polarizations distributed according to the cur-

rently loaded beam descriptions can be obtained by repeatedly calling `cir2gp` (*GeneratePolarized*):

```
subroutine cir2gp (p1, p2, x1, x2, pol, rng)

  integer p1 (input): particle code for the first particle
  integer p2 (input): particle code for the second particle
  double precision x1 (output): fraction of the beam en-
    ergy carried by the first particle
  double precision x2 (output): fraction of the beam en-
    ergy carried by the second particle
  double precision pol(0:3,0:3) (output): the joint den-
    sity matrix of the two polarizations is parametrized by a
    real  $4 \times 4$ -matrix
```

$$\rho(\chi) = \sum_{a,a'=0}^3 \frac{\chi_{aa'}}{4} \sigma_a \otimes \sigma_{a'} \quad (14)$$

using the notation $\sigma_0 = 1$. We have `pol(0,0) = 1` since $\text{tr } \rho = 1$.

```
external rng: subroutine generating a uniform deviate
```

This procedure has not been implemented in version 2.0 and will be provided in release 2.1.

3.4 Distributions

The normalized luminosity density $D_{p_1 p_2}(x_1, x_2)$ for the given flavor and helicity combination for the currently loaded beam description satisfies

$$\int dx_1 \wedge dx_2 D_{p_1 p_2}(x_1, x_2) = 1 \quad (15)$$

and is calculated by `cir2dn` (*DistributionN*):

```
double precision function cir2dn (p1, h1, p2, h2, x1, x2)

  integer p1 (input): particle code for the first particle
  integer h1 (input): helicity of the first particle
  integer p2 (input): particle code for the second particle
  integer h2 (input): helicity of the second particle
```

double precision x1 (input): fraction of the beam energy
carried by the first particle

double precision x2 (input): fraction of the beam energy
carried by the second particle

If any of the helicities is 0 and the loaded beam description is not summed over polarizations, the result is *not* the polarization summed distribution and 0 is returned instead. Application programs must either sum by themselves or load a more efficient abbreviated beam description.

`circe1` users should take note that the densities are now normalized *individually* and no longer relative to a master e^+e^- distribution. Users of `circe1` should also take note that the special treatment of δ -distributions at the endpoints has been removed. The corresponding contributions have been included in small bins close to the endpoints. For small enough bins, this approach is sufficiently accurate and avoids the pitfalls of the approach of `circe1`.

◆ Applications that convolute the `circe2` distributions with other distributions can benefit from accessing the map employed by `circe2` internally through `cir2mp` (*MaP*):

```
subroutine cir2mp (p1, h1, p2, h2, x1, x2, m1, m2, d)
  integer p1 (input): particle code for the first particle
  integer h1 (input): helicity of the first particle
  integer p2 (input): particle code for the second particle
  integer h2 (input): helicity of the second particle
  double precision x1 (input): fraction of the beam en-
    ergy carried by the first particle
  double precision x2 (input): fraction of the beam en-
    ergy carried by the second particle
  integer m1 (output): map
  integer m2 (output): map
  double precision d (output):
```

3.4.1 Extensions: General Polarizations

The product of the normalized luminosity density $D_{p_1 p_2}(x_1, x_2)$ and the joint polarization density matrix for the given flavor and helicity combination for the currently loaded beam description is calculated by `cir2dm` (*DensityMatrices*):

double precision function cir2dm (p1, p2, x1, x2, pol)

integer p1 (input): particle code for the first particle

integer p2 (input): particle code for the second particle

double precision x1 (input): fraction of the beam energy
carried by the first particle

double precision x2 (input): fraction of the beam energy
carried by the second particle

double precision pol(0:3,0:3) (output): the joint den-
sity matrix multiplied by the normalized probability den-
sity. The density matrix is parametrized by a real 4×4 -
matrix

$$D_{p_1 p_2}(x_1, x_2) \cdot \rho(\chi) = \sum_{a, a'=0}^3 \frac{1}{4} \chi_{p_1 p_2, aa'}(x_1, x_2) \sigma_a \otimes \sigma_{a'} \quad (16)$$

using the notation $\sigma_0 = 1$. We have $\text{pol}(0,0) = D_{p_1 p_2}(x_1, x_2)$
since $\text{tr } \rho = 1$.

*This procedure has not been implemented in version 2.0 and will be provided
in release 2.1.*

3.5 Private Parts

The following need not concern application programmer, except that there
must be no clash with any other global name in the application program:

common /cir2cm/: the internal data store for **circe2**, which *must not*
be accessed by application programs.

4 Examples

In this section, we collect some simple yet complete examples using the API
described in section 3. In all examples, the role of the physics application
is played by a **write** statement, which would be replaced by an appropriate
event generator for hard scattering physics or background events. The exam-
ples assume the existence of either a file **default.circe** describing polarized
 $\sqrt{s} = 500 \text{ GeV}$ beams or an abbreviated file **default_polavg.circe** where
the helicities are summed over.

4.1 Unweighted Event Generation

`circe2` has been designed for the efficient generation of unweighted events, i.e. event samples that are distributed according to the given probability density. Examples of weighted events are discussed in section 4.2 below.

4.1.1 Mixed Flavors and Helicities

The most straightforward application uses a stream of events with a mixture of flavors and helicities in *random* order. If the application can consume events without the need for costly reinitializations when the flavors are changed, a simple loop around `cir2ch` and `cir2gn` suffices:

```
program demo1
implicit none
integer p1, h1, p2, h2, n, nevent, ierror
double precision x1, x2
external random
nevent = 20
ierror = 1
call cir2ld ('default.circe', '*', 500D0, ierror)
if (ierror .lt. 0) stop
write (*, '(A7,4(X,A4),2(X,A10))')
$      '#', 'pdg1', 'hel1', 'pdg2', 'hel2', 'x1', 'x2'
do 10 n = 1, nevent
    call cir2ch (p1, h1, p2, h2, random)
    call cir2gn (p1, h1, p2, h2, x1, x2, random)
    write (*, '(I7,4(X,I4),2(X,F10.8))') n, p1, h1, p2, h2, x1, x2
10  continue
end
```

The following minimalistic linear congruential random number generator can be used for demonstrating the interface, but it is known to produce correlations and *must* be replaced by a more sophisticated one in real applications:

```
subroutine random (r)
implicit none
double precision r
integer M, A, C
parameter (M = 259200, A = 7141, C = 54773)
integer n
save n
data n /0/
n = mod (n*A + C, M)
```

```

r = dble (n) / dble (M)
end

```

4.1.2 Separated Flavors and Helicities

If the application can not switch efficiently among flavors and helicities, another approach is more useful. It walks through the flavors and helicities sequentially and uses the partial luminosities `cir2lm` to determine the correct number of events for each combination:

```

program demo2
implicit none
integer i1, i2, pdg(3), h1, h2, i, n, nevent, nev, ierror
double precision x1, x2, lumi, cir2lm
external random, cir2lm
data pdg /22, 11, -11/
nevent = 20
ierror = 1
call cir2ld ('default.circe', '*', 500D0, ierror)
if (ierror .lt. 0) stop
lumi = cir2lm (0, 0, 0, 0)
write (*, '(A7,4(X,A4),2(X,A10))')
$      '#', 'pdg1', 'hel1', 'pdg2', 'hel2', 'x1', 'x2'
i = 0
do 10 i1 = 1, 3
  do 11 i2 = 1, 3
    do 12 h1 = -1, 1, 2
      do 13 h2 = -1, 1, 2
        nev = nevent * cir2lm (pdg(i1), h1, pdg(i2), h2) / lumi
        do 20 n = 1, nev
          call cir2gn (pdg(i1), h1, pdg(i2), h2, x1, x2, random)
          i = i + 1
          write (*, '(I7,4(X,I4),2(X,F10.8))')
$              i, pdg(i1), h1, pdg(i2), h2, x1, x2
20          continue
13          continue
12          continue
11          continue
10          continue
end

```

More care can be taken to guarantee that the total number of events is not reduced by rounding `nev` towards 0, but the error will be negligible for reasonably high statistics anyway.

4.1.3 Polarization Averaged

If the helicities are to be ignored, the abbreviated file `default_polavg.circe` can be read. The code remains unchanged, but the variables `h1` and `h2` will always be set to 0.

```
program demo3
implicit none
integer p1, h1, p2, h2, n, nevent, ierror
double precision x1, x2
external random
nevent = 20
ierror = 1
call cir2ld ('default_polavg.circe', '*', 500D0, ierror)
if (ierror .lt. 0) stop
write (*, '(A7,2(X,A4),2(X,A10))')
$      '#', 'pdg1', 'pdg2', 'x1', 'x2'
do 10 n = 1, nevent
    call cir2ch (p1, h1, p2, h2, random)
    call cir2gn (p1, h1, p2, h2, x1, x2, random)
    write (*, '(I7,2(X,I4),2(X,F10.8))') n, p1, p2, x1, x2
10 continue
end
```

4.1.4 Flavors and Helicity Projections

There are three ways to produce samples with a fixed subset of flavors or helicities. As an example, we generate a sample of two photon events with $L = 0$. The first approach generates the two channels $++$ and $--$ sequentially:

```
program demo4
implicit none
double precision x1, x2, lumipp, lumimm, cir2lm
integer n, nevent, npp, nmm, ierror
external random, cir2lm
nevent = 20
ierror = 1
call cir2ld ('default.circe', '*', 500D0, ierror)
if (ierror .lt. 0) stop
lumipp = cir2lm (22, 1, 22, 1)
lumimm = cir2lm (22, -1, 22, -1)
npp = nevent * lumipp / (lumipp + lumimm)
nmm = nevent - npp
write (*, '(A7,2(X,A10))') '#', 'x1', 'x2'
```



```

do 10 n = 1, npp
  call cir2gn (22, 1, 22, 1, x1, x2, random)
  write (*, '(I7,2(X,F10.8))') n, x1, x2
10 continue
do 20 n = 1, nmm
  call cir2gn (22, -1, 22, -1, x1, x2, random)
  write (*, '(I7,2(X,F10.8))') n, x1, x2
20 continue
end

```

a second approach alternates between the two possibilities

```

program demo5
implicit none
double precision x1, x2, u, lumipp, lumimm, cir2lm
integer n, nevent, ierror
external random, cir2lm
nevent = 20
ierror = 1
call cir2ld ('default.circe', '*', 500D0, ierror)
if (ierror .lt. 0) stop
lumipp = cir2lm (22, 1, 22, 1)
lumimm = cir2lm (22, -1, 22, -1)
write (*, '(A7,2(X,A10))') '#', 'x1', 'x2'
do 10 n = 1, nevent
  call random (u)
  if (u * (lumipp + lumimm) .lt. lumipp) then
    call cir2gn (22, 1, 22, 1, x1, x2, random)
  else
    call cir2gn (22, -1, 22, -1, x1, x2, random)
  endif
  write (*, '(I7,2(X,F10.8))') n, x1, x2
10 continue
end

```

finally, the third approach uses rejection to select the desired flavors and helicities

```

program demo6
implicit none
integer p1, h1, p2, h2, n, nevent, ierror
double precision x1, x2
external random
nevent = 20
ierror = 1

```

```

call cir2ld ('default.circe', '*', 500D0, ierror)
if (ierror .lt. 0) stop
write (*, '(A7,2(X,A10))') '#', 'x1', 'x2'
n = 0
10 continue
    call cir2ch (p1, h1, p2, h2, random)
    call cir2gn (p1, h1, p2, h2, x1, x2, random)
    if ((p1 .eq. 22) .and. (p2 .eq. 22) .and.
$      ((h1 .eq. 1) .and. (h2 .eq. 1)) .or.
$      ((h1 .eq. -1) .and. (h2 .eq. -1))) then
        n = n + 1
        write (*, '(I7,2(X,F10.8))') n, x1, x2
    end if
    if (n .lt. nevent) then
        goto 10
    end if
end

```

All generated distributions are equivalent, but the chosen subsequences of random numbers will be different. It depends on the application and the channels under consideration, which approach is the most appropriate.

4.2 Distributions and Weighted Event Generation

If no events are to be generated, `cir2dn` can be used to calculate the probability density $D(x_1, x_2)$ at a given point. This can be used for numerical integration other than Monte Carlo or for importance sampling in the case that the distribution to be folded with D is more rapidly varying than D itself.

Depending on the beam descriptions, these distributions are available either for fixed helicities

```

program demo7
implicit none
integer n, nevent, ierror
double precision x1, x2, w, cir2dn
nevent = 20
ierror = 1
call cir2ld ('default.circe', '*', 500D0, ierror)
if (ierror .lt. 0) stop
write (*, '(A7,3(X,A10))') '#', 'x1', 'x2', 'weight'
do 10 n = 1, nevent
    call random (x1)

```

```

        call random (x2)
        w = cir2dn (22, 1, 22, 1, x1, x2)
        write (*, '(I7,2(X,F10.8),X,E10.4)') n, x1, x2, w
10    continue
    end

```

or summed over all helicities if the beam description is polarization averaged:

```

program demo8
implicit none
integer n, nevent, ierror
double precision x1, x2, w, cir2dn
nevent = 20
ierror = 1
call cir2ld ('default_polavg.circe', '*', 500D0, ierror)
if (ierror .lt. 0) stop
write (*, '(A7,3(X,A10))') '#', 'x1', 'x2', 'weight'
do 10 n = 1, nevent
    call random (x1)
    call random (x2)
    w = cir2dn (22, 0, 22, 0, x1, x2)
    write (*, '(I7,2(X,F10.8),X,E10.4)') n, x1, x2, w
10    continue
end

```

If the beam description is not polarization averaged, the application can perform the averaging itself (note that each distribution is normalized):

```

program demo9
implicit none
integer n, nevent, ierror
double precision x1, x2, w, cir2dn, cir2lm
double precision lumi, lumipp, lumimp, lumipm, lumimm
nevent = 20
ierror = 1
call cir2ld ('default.circe', '*', 500D0, ierror)
if (ierror .lt. 0) stop
lumipp = cir2lm (22, 1, 22, 1)
lumipm = cir2lm (22, 1, 22, -1)
lumimp = cir2lm (22, -1, 22, 1)
lumimm = cir2lm (22, -1, 22, -1)
lumi = lumipp + lumimp + lumipm + lumimm
write (*, '(A7,3(X,A10))') '#', 'x1', 'x2', 'weight'
do 10 n = 1, nevent
    call random (x1)

```

```

        call random (x2)
        w = ( lumipp * cir2dn (22, 1, 22, 1, x1, x2)
$          + lumipm * cir2dn (22, 1, 22, -1, x1, x2)
$          + lumimp * cir2dn (22, -1, 22, 1, x1, x2)
$          + lumimm * cir2dn (22, -1, 22, -1, x1, x2)) / lumi
        write (*, '(I7,2(X,F10.8),X,E10.4)') n, x1, x2, w
10    continue
    end

```

The results produced by the preceeding pair of examples will differ point-by-point, because the polarized and the polarization summed distribution will be binned differently. However, all histograms of the results with reasonable bin sizes will agree.

4.3 Scans and Interpolations

Currently there is no supported mechanism for interpolating among distributions for the discrete parameter sets. The most useful application of such a facility would be a scan of the energy dependence of an observable

$$\mathcal{O}(s) = \int dx_1 dx_2 d\Omega D(x_1, x_2, s) \frac{d\sigma}{d\Omega}(x_1, x_2, s, \Omega) O(x_1, x_2, s, \Omega) \quad (17a)$$

which has to take into account the s -dependence of the distribution $D(x_1, x_2, s)$. Full simulations of the beam dynamics for each value of s are too costly and `circe1` [1] supported linear interpolation

$$\bar{D}(x_1, x_2, s) = \frac{(s - s_-)D(x_1, x_2, s_+) + (s_+ - s)D(x_1, x_2, s_-)}{s_+ - s_-} \quad (17b)$$

as an economical compromise. However, since \mathcal{O} in (17) is a strictly *linear* functional of D , it is mathematically equivalent to interpolating \mathcal{O} itself

$$\bar{\mathcal{O}}(s) = \frac{(s - s_-)\tilde{\mathcal{O}}(s, s_+) + (s_+ - s)\tilde{\mathcal{O}}(s, s_-)}{s_+ - s_-} \quad (18a)$$

where

$$\tilde{\mathcal{O}}(s, s_0) = \int dx_1 dx_2 d\Omega D(x_1, x_2, s_0) \frac{d\sigma}{d\Omega}(x_1, x_2, s, \Omega) O(x_1, x_2, s, \Omega) \quad (18b)$$

Of course, evaluating the two integrals in (18) with comparable accuracy demands four times the calculational effort of the single integral in (17). Therefore, if overwhelming demand arises, support for (17) can be reinstated, but at the price of a considerably more involved API for loading distributions.

5 Algorithms

`circe2` attempts to recover a probability density $w(x_1, x_2)$ from a finite set of triples $\{(x_{1,i}, x_{2,i}, w_i)\}_{i=1, \dots, N}$ that are known to be distributed according to $w(x_1, x_2)$. This recovery should introduce as little bias as possible. The solution should provide a computable form of $w(x_1, x_2)$ as well as a procedure for generating more sets of triples $\{(x_{1,i}, x_{2,i}, w_i)\}$ with “the same” distribution.

The discrete distribution

$$\hat{w}(x_1, x_2) = \sum_i w_i \delta(x_1 - x_{1,i}) \delta(x_2 - x_{2,i}) \quad (19)$$

adds no bias, but is obviously not an adequate solution of the problem, because it depends qualitatively on the sample. While the sought after distribution may contain singularities, their number and the dimension of their support must not depend on the sample size. There is, of course, no unique solution to this problem and we must allow some prejudices to enter in order to single out the most adequate solution.

The method employed by `circe1` was to select a family of analytical distributions that are satisfy reasonable criteria suggested by physics [1] and select representatives by fitting the parameters of these distributions. This has been unreasonably successful for modelling the general properties, but must fail eventually if finer details are studied. Enlarging the families is theoretically possible but empirically it turns out that the number of free parameters grows faster than the descriptive power of the families.

Another approach is to forego functions that are defined globally by an analytical expression and to perform interpolation of binned samples, requiring continuity of the distribution and their derivatives. Again, this fails in practice, this time because such interpolations tend to create wild fluctuations for statistically distributed data and the resulting distributions will often violate basic conditions like positivity.

Any attempt to recover the distributions that uses local properties will have to bin the data

$$N_i = \int_{\Delta_i} dx w(x) \quad (20)$$

with

$$\Delta_i \cap \Delta_j = \emptyset \quad (i \neq j), \quad \bigcup_i \Delta_i = [0, 1] \times [0, 1] \quad (21)$$

Therefore it appears to be eminently reasonable to approximate w by a piecewise constant

$$\hat{w}(x) = \sum_i \frac{N_i}{|\Delta_i|} \Theta(x \in \Delta_i). \quad (22)$$

However, this procedure also introduces a bias and if the number of bins is to remain finite, this bias cannot be removed.

Nevertheless, one can tune this bias to the problem under study and obtain better approximations by making use of the well known fact that probability distributions are not invariant under coordinate transformations.

5.1 Histograms


The obvious approach to histogramming is to cover the unit square $[0, 1] \times [0, 1]$ uniformly with n_b^2 squares, but this approach is not economical in its use of storage. For example, high energy physics studies at a $\sqrt{s} = 500$ GeV LC will require an energy resolution of better than 1 GeV and we should bin each beam in steps of 500 MeV, i.e. $n_b = 500$. This results in a two dimensional histogram of $500^2 = 25000$ bins for each combination of flavor and helicity. Using non-portable binary storage, this amounts to 100 KB for typical single precision floating point numbers and 200 KB for typical double precision floating point numbers.

Obviously, binary storage is not a useful exchange format and we have to use an ASCII exchange format, which in its human readable form uses 14 bytes for single precision and 22 bytes for double precision and the above estimates have to be changed to 350 KB and 550 KB respectively. We have four flavor combinations if pair creation is ignored and nine flavor combinations if it is taken into account. For each flavor combination there are four helicity combinations and we arrive at 16 or 36 combinations.

Altogether, a fixed bin histogram requires up to 20 MB of data for *each* accelerator design at *each* energy step for a mere 1% energy resolution. While this could be handled with modern hardware, we have to keep in mind that the storage requirements grow quadratically with the resolution and that several generations of designs should be kept available for comparison studies.

For background studies, low energy tails down to the pair production threshold $m_e = 511$ KeV $\approx 10^{-6} \cdot \sqrt{s}$ have to be described correctly. Obviously, fixed bin histograms are not an option at all in this case.

 mention 2-D Delauney triangulations here

 mention Stazsek's FOAM [14] here

 praise VEGAS/VAMP

5.2 Coordinate Dependence of Sampling Distributions

The contents of this section is well known to all practitioners and is repeated only for establishing notation. For any sufficiently smooth (piecewise differentiable suffices) map

$$\begin{aligned}\phi : D_x &\rightarrow D_y \\ x &\mapsto y = \phi(x)\end{aligned}\tag{23}$$

integrals of distribution functions $w : D_y \rightarrow \mathbf{R}$ are invariant, as long as we apply the correct Jacobian factor

$$\int_{D_y} dy w(y) = \int_{D_x} dx \frac{d\phi}{dx} \cdot (w \circ \phi)(x) = \int_{D_x} dx w^\phi(x)\tag{24a}$$

where

$$w^\phi(x) = (w \circ \phi)(x) \cdot \frac{d\phi}{dx}(x) = \frac{(w \circ \phi)(x)}{\left(\frac{d\phi^{-1}}{dy} \circ \phi\right)(x)}\tag{24b}$$

The fraction can be thought of as being defined by the product, if the map ϕ is not invertible. Below, we will always deal with invertible maps and the fraction is more suggestive for our purposes. Therefore, ϕ induces a pull-back map ϕ^* on the space of integrable functions

$$\begin{aligned}\phi^* : L_1(D_y, \mathbf{R}) &\rightarrow L_1(D_x, \mathbf{R}) \\ w &\mapsto w^\phi = \frac{w \circ \phi}{\left(\frac{d\phi^{-1}}{dy} \circ \phi\right)}\end{aligned}\tag{25}$$

If we find a map ϕ_w with $d\phi^{-1}/dy \sim w$, then sampling the transformed weight w^{ϕ_w} will be very stable, even if sampling the original weight w is not.

On the other hand, the inverse map

$$\begin{aligned}(\phi^*)^{-1} : L_1(D_x, \mathbf{R}) &\rightarrow L_1(D_y, \mathbf{R}) \\ w &\mapsto w^{(\phi^{-1})} = \left(\frac{d\phi^{-1}}{dy}\right) \cdot (w \circ \phi^{-1})\end{aligned}\tag{26}$$

with $(\phi^{-1})^* = (\phi^*)^{-1}$ can be used to transform a uniform distribution into the potentially much more interesting $d\phi^{-1}/dy$.

5.3 Sampling Distributions With Integrable Singularities

A typical example appearing in `circle1`

$$\int_0^1 dx w(x) \approx \int_0^1 dx (1-x)^\beta\tag{27}$$

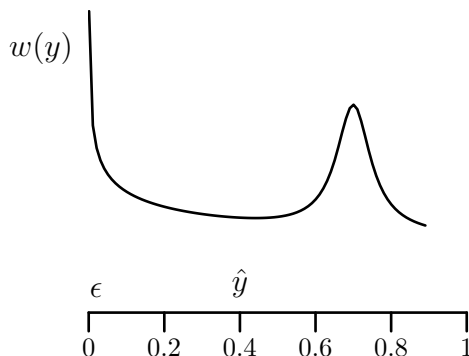


Figure 2: Distribution with both an integrable singularity $\propto x^{-0.2}$ and a peak at finite $x \approx 0.7$.

converges for $\beta > -1$, while the variance

$$\int_0^1 dx (w(x))^2 \approx \int_0^1 dx (1-x)^{2\beta} \quad (28)$$

does not converge for $\beta \leq -1/2$. Indeed, this case is the typical case for realistic beamstrahlung spectra at e^+e^- LCs and has to be covered.

Attempting a naive VEGAS/VAMP adaption fails, because the *nonintegrable* variance density acts as a sink for bins, even though the density itself is integrable.



- examples show that moments of distributions are reproduced *much* better after mapping, even if histograms look indistinguishable.
- biasing doesn't appear to work as well as fences

The distributions that we want to describe can contain integrable singularities and δ -distributions at the endpoints. Since there is always a finite resolution, both contributions can be handled by a finite binsize at the endpoints. However, we can expect to improve the convergence of the grid adaption in neighborhoods of the singularities by canceling the singularities with the Jacobian of a power map. Also the description of the distribution *inside* each bin will be improved for reasonable maps.

5.4 Piecewise Differentiable Maps



blah, blah, blah

Ansatz:

$$\begin{aligned}\Phi_{\{\phi\}} : [X_0, X_1] &\rightarrow [Y_0, Y_1] \\ x &\mapsto \Phi_{\{\phi\}}(x) = \sum_{i=1}^n \Theta(x_i - x) \Theta(x - x_{i-1}) \phi(x)\end{aligned}\quad (29)$$

with $x_0 = X_0$, $x_n = X_1$ and $x_i > x_{i-1}$. In each interval

$$\begin{aligned}\phi_i : [x_{i-1}, x_i] &\rightarrow [y_{i-1}, y_i] \\ x &\mapsto y = \phi_i(x)\end{aligned}\quad (30)$$

with $y_0 = Y_0$, $y_n = Y_1$

5.4.1 Powers

 integrable singularities

$$\begin{aligned}\psi_{a_i, b_i}^{\alpha_i, \xi_i, \eta_i} : [x_{i-1}, x_i] &\rightarrow [y_{i-1}, y_i] \\ x &\mapsto \psi_{a_i, b_i}^{\alpha_i, \xi_i, \eta_i}(x) = \frac{1}{b_i} (a_i(x - \xi_i))^{\alpha_i} + \eta_i\end{aligned}\quad (31)$$

We assume $\alpha_i \neq 0$, $a_i \neq 0$ and $b_i \neq 0$. Note that $\psi_{a,b}^{\alpha,\xi,\eta}$ encompasses both typical cases for integrable endpoint singularities $x \in [0, 1]$:

$$\psi_{1,1}^{\alpha,0,0}(x) = x^\alpha \quad (32a)$$

$$\psi_{-1,-1}^{\alpha,1,1}(x) = 1 - (1 - x)^\alpha \quad (32b)$$

The inverse maps are

$$\begin{aligned}(\psi_{a_i, b_i}^{\alpha_i, \xi_i, \eta_i})^{-1} : [y_{i-1}, y_i] &\rightarrow [x_{i-1}, x_i] \\ y &\mapsto (\psi_{a_i, b_i}^{\alpha_i, \xi_i, \eta_i})^{-1}(y) = \frac{1}{a_i} (b_i(y - \eta_i))^{1/\alpha_i} + \xi_i\end{aligned}\quad (33)$$

and incidentally:

$$(\psi_{a,b}^{\alpha,\xi,\eta})^{-1} = \psi_{b,a}^{1/\alpha,\eta,\xi} \quad (34)$$

The Jacobians are

$$\frac{dy}{dx}(x) = \frac{a\alpha}{b} (a(x - \xi))^{\alpha-1} \quad (35a)$$

$$\frac{dx}{dy}(y) = \frac{b}{a\alpha} (b(y - \eta))^{1/\alpha-1} \quad (35b)$$

and satisfy, of course,

$$\frac{dx}{dy}(y(x)) = \frac{1}{\frac{dy}{dx}(x)} \quad (36)$$

In order to get a strictly monotonous function, we require

$$\frac{a\alpha}{b} > 0 \quad (37)$$

Since we will see below that almost always in practical applications $\alpha > 0$, this means $\epsilon(a) = \epsilon(b)$.

From (25) and (35b), we see that this map is useful for handling weights²

$$w(y) \propto (y - \eta)^\beta \quad (38)$$

for $\beta > -1$, if we choose $\beta - (1/\alpha - 1) \geq 0$, i. e. $\alpha \gtrsim 1/(1 + \beta)$.

The five parameters $(\alpha, \xi, \eta, a, b)$ are partially redundant. Indeed, there is a one parameter semigroup of transformations

$$(\alpha, \xi, \eta, a, b) \rightarrow (\alpha, \xi, \eta, at, bt^\alpha), \quad (t > 0) \quad (39)$$

that leaves $\psi_{a,b}^{\alpha,\xi,\eta}$ invariant:

$$\psi_{a,b}^{\alpha,\xi,\eta} = \psi_{at,bt^\alpha}^{\alpha,\xi,\eta} \quad (40)$$

Assuming that multiplications are more efficient than sign transfers, the redundant representation is advantageous. Unless sign transfers are implemented directly in hardware, they involve a branch in the code and the assumption appears to be reasonable.

5.4.2 Identity

The identity map

$$\begin{aligned} \iota : [x_{i-1}, x_i] &\rightarrow [y_{i-1}, y_i] = [x_{i-1}, x_i] \\ x &\mapsto \iota(x) = x \end{aligned} \quad (41)$$

is a special case of the power map $\iota = \psi_{1,1}^{1,0,0}$, but, for efficiency, it is useful to provide a dedicated “implementation” anyway.

²The limiting case $(y - \eta)^{-1}$ could be covered by maps $x \mapsto e^{a(x-\xi)}/b + \eta$, where the non-integrability of the density is reflected in the fact that the domain of the map is semi-infinite (i. e. $x \rightarrow -\epsilon(a) \cdot \infty$). In physical applications, the densities are usually integrable and we do not consider this case in the following.

5.4.3 Null

The null map

$$\begin{aligned}\iota : [x_{i-1}, x_i] &\rightarrow [y_{i-1}, y_i] = [x_{i-1}, x_i] \\ x &\mapsto \iota(x) = x\end{aligned}\tag{42}$$

is a special case of the identity map, where all weights are set to zero. This is useful for the regions where the beam simulations do not produce enough events and should be ignored.

5.4.4 Resonances



- not really needed in the applications so far, because the variance remains integrable.
- no clear example for significantly reduced numbers of bins for the same quality with mapping.
- added for illustration.

$$\begin{aligned}\rho_{a_i, b_i}^{\xi_i, \eta_i} : [x_{i-1}, x_i] &\rightarrow [y_{i-1}, y_i] \\ x &\mapsto \rho_{a_i, b_i}^{\xi_i, \eta_i}(x) = a_i \tan\left(\frac{a_i}{b_i^2}(x - \xi_i)\right) + \eta_i\end{aligned}\tag{43}$$

Inverse

$$\begin{aligned}(\rho_{a_i, b_i}^{\xi_i, \eta_i})^{-1} : [y_{i-1}, y_i] &\rightarrow [x_{i-1}, x_i] \\ y &\mapsto (\rho_{a_i, b_i}^{\xi_i, \eta_i})^{-1}(y) = \frac{b_i^2}{a_i} \operatorname{atan}\left(\frac{y - \eta_i}{a_i}\right) + \xi_i\end{aligned}\tag{44}$$

is useful for mapping *known* peaks, since

$$\frac{d\phi^{-1}}{dy}(y) = \frac{dx}{dy}(y) = \frac{b^2}{(y - \eta)^2 + a^2}\tag{45}$$

5.4.5 Patching Up

Given a collection of intervals with associated maps, it remains to construct a combined map. Since *any* two intervals can be mapped onto each other by a map with constant Jacobian, we have a “gauge” freedom and must treat x_{i-1} and x_i as free parameters in

$$\psi_{a_i, b_i}^{\alpha_i, \xi_i, \eta_i} : [x_{i-1}, x_i] \rightarrow [y_{i-1}, y_i]\tag{46}$$

i. e.

$$x_j = (\psi_{a_i, b_i}^{\alpha_i, \xi_i, \eta_i})^{-1}(y_j) = \frac{1}{a_i} (b_i(y_j - \eta_i))^{1/\alpha_i} + \xi_i \quad \text{for } j \in \{i-1, i\}\tag{47}$$

Since α and η denote the strength and the location of the singularity, respectively, they are the relevant input parameters and we must solve the constraints (47) for ξ_i , a_i and b_i . Indeed a family of solutions is

$$a_i = \frac{(b_i(y_i - \eta_i))^{1/\alpha_i} - (b_i(y_{i-1} - \eta_i))^{1/\alpha_i}}{x_i - x_{i-1}} \quad (48a)$$

$$\xi_i = \frac{x_{i-1}|y_i - \eta_i|^{1/\alpha_i} - x_i|y_{i-1} - \eta_i|^{1/\alpha_i}}{|y_i - \eta_i|^{1/\alpha_i} - |y_{i-1} - \eta_i|^{1/\alpha_i}} \quad (48b)$$

which is unique up to (39). The degeneracy (39) can finally be resolved by demanding $|b| = 1$ in (48a).

It remains to perform a ‘gauge fixing’ and choose the domains $[x_{i-1}, x_i]$. The minimal solution is $x_i = y_i$ for all i , which maps the boundaries between different mappings onto themselves and we need only to store either $\{x_0, x_1, \dots, x_n\}$ or $\{y_0, y_1, \dots, y_n\}$.

For the resonance map

$$x_j = (\rho_{a_i, b_i}^{\xi_i, \eta_i})^{-1}(y_j) = \frac{b_i^2}{a_i} \operatorname{atan} \left(\frac{y_j - \eta_i}{a_i} \right) + \xi_i \quad \text{for } j \in \{i-1, i\} \quad (49)$$


i. e.

$$b_i = \sqrt{a_i \frac{x_i - x_{i-1}}{\operatorname{atan} \left(\frac{y_i - \eta_i}{a_i} \right) - \operatorname{atan} \left(\frac{y_{i-1} - \eta_i}{a_i} \right)}} \quad (50a)$$


$$\xi_i = \frac{x_{i-1} \operatorname{atan} \left(\frac{y_i - \eta_i}{a_i} \right) - x_i \operatorname{atan} \left(\frac{y_{i-1} - \eta_i}{a_i} \right)}{x_i - x_{i-1}} \quad (50b)$$

as a function of the physical peak location η and width a .

6 Preparing Beam Descriptions with circe2_tool

 rationale

6.1 circe2_tool Files

 { and }

6.1.1 Per File Options

file: a double quote delimited string denoting the name of the output file that will be read by `cir2ld` (in the format described in table 2).

6.1.2 Per Design Options

design: a double quote delimited string denoting a name for the design. See the description of `cir2ld` on page 14 for conventions for these names.

roots: \sqrt{s} /GeV of the accelerator design.

bins: number of bins for the histograms in both directions. `bins/1` and `bins/2` apply only to x_1 and x_2 respectively. This number can be overwritten by channel options.

comment: a double quote delimited string denoting a one line comment that will be copied to the output file. This command can be repeated.

6.1.3 Per Channel Options

If an option can apply to either beam or both, it can be qualified by `/1` or `/2`. For example, `bins` applies to both beams, while `bins/1` and `bins/2` apply only to x_1 and x_2 respectively.

bins: number of bins for the histograms. These overwrite the per-design option.

pid: particle identification: either a PDG code [11] (see page 3) or one of `gamma`, `photon`, `electron`, `positron`.

pol: polarization: one of $\{-1, 0, 1\}$, where 0 means unpolarized (see page 3).

min: minimum value of the coordinate(s). The default is 0.

max: maximum value of the coordinate(s). The default is 1.

fix: fix the boundaries: `min`, `max` or `*`.

free: lower the lower boundary or raise the upper boundary, if necessary.

map: apply a map to a subinterval. Currently, three types of maps are supported:

id { n [x_{\min}, x_{\max}] }: apply an identity map in the interval [x_{\min}, x_{\max}] subdivided into n bins. The non-trivial effect of this map is that the endpoints x_{\min} and x_{\max} are frozen.

null { n [x_{\min}, x_{\max}] }: apply a null map in the interval [x_{\min}, x_{\max}] subdivided into n bins. n will almost always be 1. The non-trivial effect of this map is that the weights between x_{\min} and x_{\max} are set to zero.

power { n [x_{\min}, x_{\max}] **beta** = β **eta** = η }: apply a power map in the interval [x_{\min}, x_{\max}] subdivided into n bins. $\alpha = 1/(1 + \beta)$, such that an integrable singularity at η with power β is mapped away. This is the most important map in practical applications and manual fine tuning is rewarded.

resonance { n [x_{\min}, x_{\max}] **center** = η **width** = a }: apply a resonance map in the interval [x_{\min}, x_{\max}] subdivided into n bins. This map is hardly ever needed, since VEGAS/VAMP appears to be able to handle non-singular peaks very well.

triangle: *experimental, do not use!*

notriangle: *experimental, do not use!*

lumi: luminosity of the beam design, in units of

$$\text{fb}^{-1} \nu^{-1} = 10^{32} \text{cm}^{-2} \text{sec}^{-1} \quad (51)$$

where $\nu = 10^7 \text{sec} \approx \text{year}/\pi$ is an “effective year” of running with about 30% up-time

events: a double quote delimited string denoting the name of the input file.

ascii: input file contains formatted ASCII numbers.

binary: input file is in raw binary format that can be accessed by fast memory mapped I/O. Such files are not portable and must not contain Fortran record markers.

columns: number of columns in a binary file.

iterations: maximum number of iterations of the VEGAS/VAMP refinement. It is not necessary to set this parameter, but e.g. **iterations** = 0 is useful for illustrating the effect of adaption.

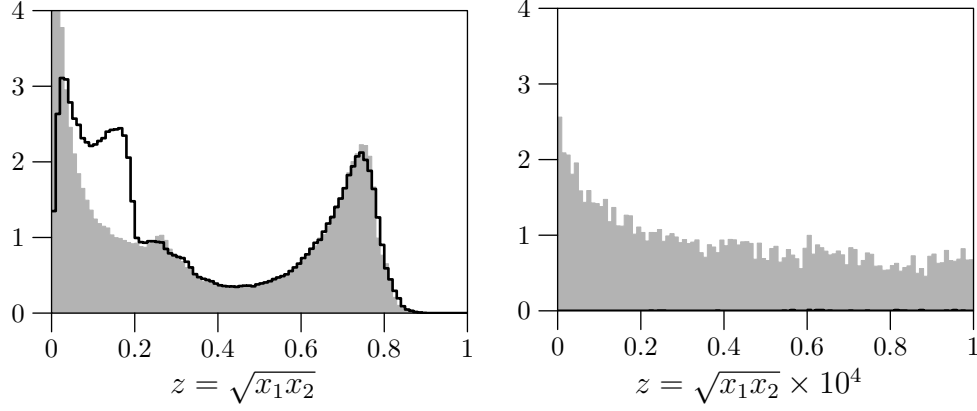


Figure 3: Using 20 equidistant bins in each direction. In the region blown up on the right neither 20 equidistant bins nor 50 equidistant bin produce enough events to be visible. In this and all following plots, the simulated input data is shown as a filled histogram, and the `circe2` parametrization is shown as a solid line.

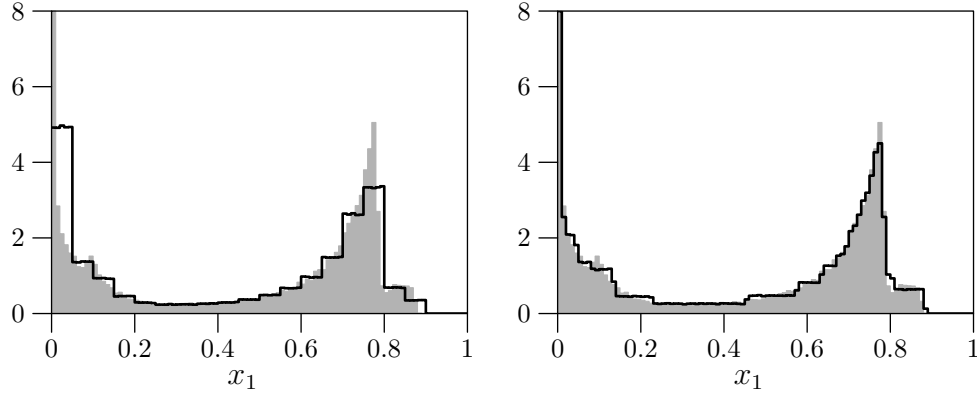


Figure 4: Using 20 bins, both equidistant (left) and adapted (right).

6.2 `circe2_tool` Demonstration

We can use the example of figure 1 (a simulated realistic $\gamma\gamma$ luminosity spectrum (helicities: $(+, +)$) for a 500 GeV photon collider at TESLA [7]) to demonstrate the effects of different options. In order to amplify the effects, only 20 bins are used in each direction, but figure 8 will show that adequate results are achievable in this case too.



Figure 5: 20 adapted bins. In the blow-up, the 50 bin result is shown for illustration as a thin line, while the 20 bin result remains almost invisible.



Figure 6: Using 20 equidistant bins in each direction with a power map appropriate for $x^{-0.67}$.

In figure 3, 20 equidistant bins in each direction

`bins = 20 iterations = 0`

produce an acceptable description of the high energy peak but are clearly inadequate for $z < 0.2$. In the blown up region, neither 20 equidistant bins nor 50 equidistant bin produce more than a handful of events and remain almost invisible. The bad low energy behaviour can be understood from the

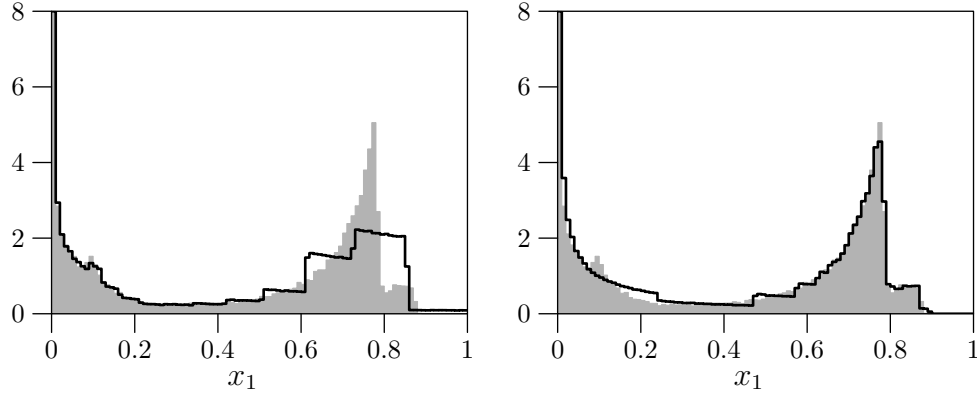


Figure 7: Using 20 bins with a power map appropriate for $x^{-0.67}$, equidistant (left) and adapted (right).

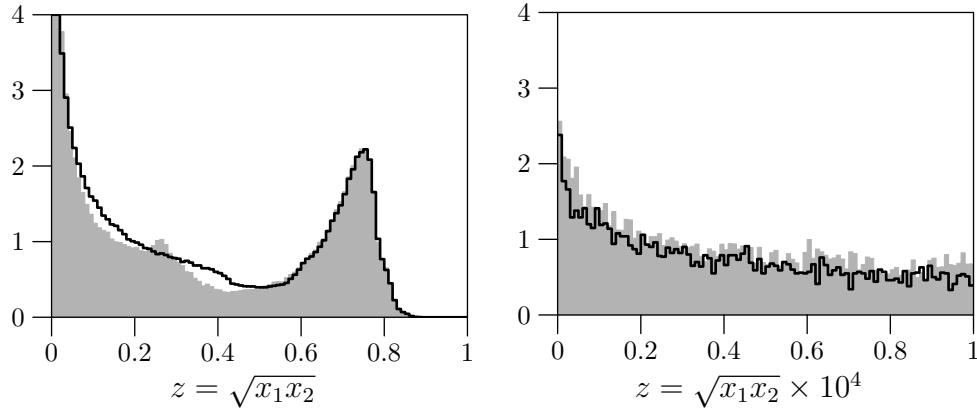


Figure 8: Using 20 adapted bins in each direction with a power map appropriate for $x^{-0.67}$.

convolution of the obviously coarse approximations in left figure of figure 4. Letting the grid adapt

`bins = 20`

produces a much better approximation in the right figure of figure 4. And indeed, the convolution in figure 5 is significantly improved for $x \lesssim 0.2$, but remains completely inadequate in the very low energy region, blown up on the right hand side.



Figure 9: Using 4 + 16 adapted bins in each direction with a power map appropriate for $x^{-0.67}$ in the 4 bins below $x < 0.05$.

A better description of the low energy tail requires a power map and figure 6 shows that equidistant bins

```
map = power { 20 [0,1] beta = -0.67 eta = 0 } iterations = 0
```

already produce a much improved description of the low energy region, including the blow-up on the right hand side. However, the description of the peak has gotten much worse, which is explained by the coarsening of the bins in the high energy region, as shown in figure 7. The best result is obtained by combining a power map with adaption

```
map = power { 20 [0,1] beta = -0.67 eta = 0 }
```

with the results depicted in figure 8. Balancing the number of bins used for a neighborhood of the integrable singularity at $x_i \rightarrow 0$ and the remainder can be improved by allocating a fixed number of bins for each

```
map = power { 4 [0,0.05] beta = -0.67 eta = 0 }
map = id { 16 [0.05,1] }
```

as shown in figure 9. If the data were not stochastic, this manual allocation would not be necessary, because the neighborhood of the singularity would not contribute to the variance and consequently use few bins. However, the stochastic variance cannot be suppressed and will pull in more bins than useful. If the power of the map were overcompensating the power of the singularity, instead of being tuned to it, the limit $x_i \rightarrow 0$ would be

suppressed automatically. But in this case, the low-energy tail could not be described accurately.

The description with 20 bins in figure 9 is not as precise as the 50 bins

```
map = power { 10 [0,0.05] beta = -0.67 eta = 0 }
map = id { 40 [0.05,1] }
```

in figure 1, but can suffice for many studies and requires less than one sixth of the storage space.

6.3 More circe2_tool Examples

Here is an example that can be used to demonstrate the beneficial effects of powermaps. The simulated events in `teslagg_500.gg.++.events` are processed once with map and once without a map. Both times 50 bins are used in each direction.

```
{ file = "test_mappings.circe"
  { design = "TESLA" roots = 500
    { pid/1 = 22 pid/2 = 11 pol/1 = 1 pol/2 = 1
      events = "teslagg_500.gg.++.events" binary lumi = 110.719
      bins/1 = 50
      map/2 = id { 49 [0,0.9999999999] }
      map/2 = id { 1 [0.9999999999,1] } } }
  { design = "TESLA (mapped)" roots = 500
    { pid/1 = 22 pid/2 = 11 pol/1 = 1 pol/2 = 1
      events = "teslagg_500.gg.++.events" binary lumi = 110.719
      map/1 = power { 50 [0,1] beta = -0.67 eta = 0 }
      map/2 = power { 49 [0,0.9999999999] beta = -0.6 eta = 1 }
      map/2 = id { 1 [0.9999999999,1] } } } }
```

In a second step, the distributions generated from both designs in `test_mappings.circe` can be compared with the original distribution.

7 On the Implementation of circe2_tool

7.1 Divisions

 VEGAS/VAMP, basically ...

<i>! any comment</i>	optional, repeatable
CIRCE2 FORMAT#1	mandatory start line
design, roots	
'name' \sqrt{s}	mandatory quotes!
#channels, pol.support	
n_c 'name'	mandatory quotes!
pid1, pol1, pid2, pol2, lumi] repeat n_c times
$p_1 h_1 p_2 h_2 \int \mathcal{L}$	
#bins1, #bins2, triangle?	
$n_1 n_2 t$	
x1, map1, alpha1, xi1, eta1, a1, b1	
$x_{1,0}$	
$x_{1,1} m_{1,1} \alpha_{1,1} \xi_{1,1} \eta_{1,1} a_{1,1} b_{1,1}$	
...	
$x_{1,n_1} m_{1,n_1} \alpha_{1,n_1} \xi_{1,n_1} \eta_{1,n_1} a_{1,n_1} b_{1,n_1}$	
x2, map2, alpha2, xi2, eta2, a2, b2	
$x_{2,0}$	
$x_{2,1} m_{2,1} \alpha_{2,1} \xi_{2,1} \eta_{2,1} a_{2,1} b_{2,1}$	
...	
$x_{2,n_2} m_{2,n_2} \alpha_{2,n_2} \xi_{2,n_2} \eta_{2,n_2} a_{2,n_2} b_{2,n_2}$	
weights	
$w_1 [w_1 \chi_1^{0,1} w_1 \chi_1^{0,2} \dots w_1 \chi_1^{3,3}]$	optional $w \cdot \chi$
$w_2 [w_1 \chi_2^{0,1} w_1 \chi_2^{0,2} \dots w_1 \chi_2^{3,3}]$	
...	
$w_{n_1 n_2} [w_1 \chi_{n_1 n_2}^{0,1} w_1 \chi_{n_1 n_2}^{0,2} \dots w_1 \chi_{n_1 n_2}^{3,3}]$] end repeat
ECRIC2	
	mandatory end line

Table 2: File format. The variable input lines (except comments) are designed to be readable by FORTRAN77 ‘list-directed’ input. The files are generated from simulation data with the program `circe2_tool` and are read transparently by the procedure `cir2ld`. The format is documented here only for completeness.

```

module type Division =
  sig
    type t
    val copy : t -> t
    val record : t -> float -> float -> unit
    val rebin : ?power:float -> t -> t
    val find : t -> float -> int
    val bins : t -> float array
    val to_channel : out_channel -> t -> unit
  end

```

Figure 10: O’Caml signature for divisions. `Division.t` is the abstract data type for division of a real interval. Note that `Division` does *not* contain a function `create : ... -> t` for constructing maps. This is provided by concrete implementations (see figures 11 and 14), that can be projected on `Diffmap`

```

module type Mono_Division =
  sig
    include Division
    val create : int -> float -> float -> t
  end

```

Figure 11: O’Caml signature for simple divisions of an interval. The `create` function returns an equidistant starting division.

7.2 Differentiable Maps

7.3 Polydivisions

 patched divisions ...

7.4 Grids

8 The Next Generation

Future generations can try to implement the following features:

```

module type Diffmap =
  sig
    type t
    type domain
    val x_min : t -> domain
    val x_max : t -> domain
    type codomain
    val y_min : t -> codomain
    val y_max : t -> codomain
    val phi : t -> domain -> codomain
    val ihp : t -> codomain -> domain
    val jac : t -> domain -> float
    val caj : t -> codomain -> float
  end

module type Real_Diffmap =
  T with type domain = float and type codomain = float

```

Figure 12: O’Caml signature for differentiable maps. `Diffmap.t` is the abstract data type for differentiable maps. Note that `Diffmap` does *not* contain a functions like `create : ... -> t` for constructing maps. These are provided by concrete implementations, that can be projected onto `Diffmap`.

```

module type Real_Diffmaps =
  sig
    include Real_Diffmap
    val id : float -> float -> t
  end

```

Figure 13: Collections of real differentiable maps, including at least the identity. The function `id` returns an identity map from a real interval onto itself.

8.1 Variable # of Bins

One can monitor the total variance in each interval of the polydivisions and move bins from smooth intervals to wildly varying intervals, keeping the total number of bins constant.

```

module type Poly_Division =
  sig
    include Division
    module M : Real_Diffmaps
    val create :
      (int * M.t) list -> int -> float -> float -> t
  end

module Make_Poly_Division (M : Real_Diffmaps) :
  Poly_Division with module Diffmaps = M

```

Figure 14: O’Caml signature for divisions of an interval, with piecewise differentiable mappings, as specified by the first argument of `create`. The functor `Make_Poly_Division` ...

```

module type Grid =
  sig
    module D : Division
    type t
    val create : D.t -> D.t -> t
    val copy : t -> t
    val record : t -> float -> float -> float -> unit
    val rebin : ?power:float -> t -> t
    val variance : t -> float
    val to_channel : out_channel -> t -> unit
  end

module Make_Grid (D : Division) : Grid with module D = D

```

Figure 15: O’Caml signature for grids. The functor `Make_Grid` can be applied to *any* module of type `Division`, in particular both `Mono_Division` and `Poly_Division`.

8.2 Adapting Maps Per-Cell

Iff there is enough statistics, one can adapt the mapping class and parameters per bin.

💡 There’s a nice duality between adapting bins for a constant mapping on one side and adapting mappings for constant bins. Can one merge the two approaches.

8.3 Non-Factorized Polygrids

One could think of a non-factorized distribution of mappings.

9 Conclusions

Acknowledgements

Thanks to Valery Telnov for useful discussions. Thanks to the worldwide Linear Collider community and the ECFA/DESY study groups in particular for encouragement. This research is supported by Bundesministerium für Bildung und Forschung, Germany, (05 HT9RDA).

References

- [1] T. Ohl, Comput. Phys. Commun. **101** (1997) 269 [hep-ph/9607454].
- [2] T. Sjostrand, L. Lonnblad and S. Mrenna, *PYTHIA 6.2: Physics and manual*, LU-TP 01-21, [hep-ph/0108264].
- [3] G. Corcella et al., *Herwig 6.3 release note*, CAVENDISH-HEP 01-08, CERN-TH 2001-173, DAMTP 2001-61, [hep-ph/0107071].
- [4] I. F. Ginzburg, G. L. Kotkin, V. G. Serbo and V. I. Telnov, Nucl. Instrum. Meth. **205** (1983) 47.
- [5] G. P. Lepage, J. Comp. Phys. **27**, 192 (1978); G. P. Lepage, Technical Report No. CLNS-80/447, Cornell (1980).
- [6] T. Ohl, Comput. Phys. Commun. **120** (1999) 13 [hep-ph/9806432]; T. Ohl, *Electroweak Gauge Bosons at Future Electron-Positron Colliders*, Darmstadt University of Technology, 1999, IKDA 99/11, LC-REV-1999-005 [hep-ph/9911437].
- [7] V. Telnov, 2001 (private communication).
- [8] Xavier Leroy, *The Objective Caml System, Release 3.02, Documentation and User's Guide*, Technical Report, INRIA, 2001, <http://pauillac.inria.fr/ocaml/>.
- [9] I. F. Ginzburg, G. L. Kotkin, S. L. Panfil, V. G. Serbo and V. I. Telnov, Nucl. Instrum. Meth. A **219** (1984) 5.

- [10] P. Chen, G. Horton-Smith, T. Ohgaki, A. W. Weidemann and K. Yokoya, Nucl. Instrum. Meth. **A355** (1995) 107.
- [11] D. E. Groom *et al.* [Particle Data Group Collaboration], *Review of particle physics*, Eur. Phys. J. **C15** (2000) 1.
- [12] D.E. Knuth, *The Art of Computer Programming, Vol. 2*, (3rd ed.), Addison-Wesley, Reading, MA, 1997.
- [13] George Marsaglia, *The Marsaglia Random Number CD-ROM*, FSU, Dept. of Statistics and SCRI, 1996.
- [14] S. Jadach, Comput. Phys. Commun. **130** (2000) 244 [arXiv:physics/9910004].

10 Implementation of circe2

```

49a  <Version 49a>≡ (63f)
      'Version 3.1.8'

49b  <implicit none 49b>≡
      implicit none

49c  <circe2.f90 49c>≡
      ! circe2.f90 -- correlated beam spectra for linear colliders
      <Copyleft notice 50a>
      <Separator 49d>
      module circe2
        use kinds
        implicit none
        private
        <circe2 parameters 55e>
        <circe2 declarations 50b>
        contains
        <circe2 implementation 55a>
      end module circe2

49d  <Separator 49d>≡ (49c 55 60 61b 63 72d)
      !-----

```

The following is usually not needed for scientific programs. Nobody is going to hijack such code. But let us include it anyway to spread the gospel of free software:

```
50a  <Copyleft notice 50a>≡ (49c 72d)
      ! Copyright (C) 2001-2026 by Thorsten Ohl <ohl@physik.uni-wuerzburg.de>
      !
      ! Circe2 is free software; you can redistribute it and/or modify it
      ! under the terms of the GNU General Public License as published by
      ! the Free Software Foundation; either version 2, or (at your option)
      ! any later version.
      !
      ! Circe2 is distributed in the hope that it will be useful, but
      ! WITHOUT ANY WARRANTY; without even the implied warranty of
      ! MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
      ! GNU General Public License for more details.
      !
      ! You should have received a copy of the GNU General Public License
      ! along with this program; if not, write to the Free Software
      ! Foundation, Inc., 675 Mass Ave, Cambridge, MA 02139, USA.
```

11 Data

```
50b  <circe2 declarations 50b>≡ (49c) 50c>
      type circe2_division
      <circe2_division members 52d>
      end type circe2_division

50c  <circe2 declarations 50b>+≡ (49c) <50b 50d>
      type circe2_channel
      <circe2_channel members 51b>
      end type circe2_channel

50d  <circe2 declarations 50b>+≡ (49c) <50c 54e>
      type circe2_state
      <circe2_state members 51a>
      end type circe2_state
      public :: circe2_state
```

We store the probability distribution function as a one-dimensional array `wgt`³, since this simplifies the binary search used for inverting the distribution. `[wgt(0,ic)]` is always 0 and serves as a convenient sentinel for the

³The second “dimension” is just an index for the channel.

x_3^{\max}					
$i_2 = n_2$	$n_1(n_2 - 1) + 1$	$n_1(n_2 - 1) + 2$	\dots	$n_1 n_2 - 1$	$n_1 n_2$
\dots	\dots	\dots	\dots	\dots	$n_1(n_2 - 1)$
3	$2n_1 + 1$	\dots	\dots	\dots	\dots
2	$n_1 + 1$	$n_1 + 2$	\dots	\dots	$2n_1$
1	1	2	3	\dots	n_1
x_2^{\min}					
	$x_1^{\min} \ i_1 = 1$	2	3	\dots	$n_1 \ x_1^{\max}$

Figure 16: Enumerating the bins linearly, starting from 1 (Fortran style). Probability distribution functions will have a sentinel at 0 that's always 0.

binary search. It is *not* written in the file, which contains the normalized weight of the bins.

51a `<circe2_state members 51a>≡` (50d) 54a>

`type(circe2_channel), dimension(:), allocatable :: ch`

51b `<circe2_channel members 51b>≡` (50c) 51c>

`real(kind=default), dimension(:), allocatable :: wgt`

51c `<circe2_channel members 51b>+≡` (50c) <51b 52c>

`type(circe2_division), dimension(2) :: d`

Using figure 16, calculating the index of a bin from the two-dimensional coordinates is straightforward, of course:

$$i = i_1 + (i_2 - 1)n_1. \quad (52)$$

The inverse

$$i_1 = 1 + ((i - 1) \bmod n_1) \quad (53a)$$

$$i_2 = 1 + \lfloor (i - 1)/n_1 \rfloor \quad (53b)$$

can also be written

$$i_2 = 1 + \lfloor (i - 1)/n_1 \rfloor \quad (54a)$$

$$i_1 = i - (i_2 - 1)n_1 \quad (54b)$$

because

$$\begin{aligned} 1 + \lfloor (i - 1)/n_1 \rfloor &= 1 + \lfloor i_2 - 1 + (i_1 - 1)/n_1 \rfloor \\ &= 1 + \lfloor (i_1 + (i_2 - 1)n_1 - 1)/n_1 \rfloor = 1 + i_2 - 1 + \underbrace{\lfloor (i_1 - 1)/n_1 \rfloor}_{=0} = i_2 \end{aligned} \quad (55a)$$

and trivially

$$i - (i_2 - 1)n_1 = i_1 + (i_2 - 1)n_1 - (i_2 - 1)n_1 = i_1 \quad (55b)$$

$$52a \quad \langle (i1, i2) \leftarrow i \ 52a \rangle \equiv \quad (67b)$$

$$i2 = 1 + (i - 1) / \text{ubound}(\text{ch}\%d(1)\%x, \text{dim}=1)$$

$$i1 = i - (i2 - 1) * \text{ubound}(\text{ch}\%d(1)\%x, \text{dim}=1)$$

$$52b \quad \langle ib \leftarrow i \ 52b \rangle \equiv \quad (55c)$$

$$ib(2) = 1 + (i - 1) / \text{ubound}(\text{ch}\%d(1)\%x, \text{dim}=1)$$

$$ib(1) = i - (ib(2) - 1) * \text{ubound}(\text{ch}\%d(1)\%x, \text{dim}=1)$$

The density normalized to the bin size

$$v = \frac{w}{\Delta x_1 \Delta x_2}$$

such that

$$\int dx_1 dx_2 v = \sum w = 1$$

For mapped distributions, on the level of bins, we can either use the area of the domain and apply a jacobian or the area of the codomain directly

$$\frac{dx}{dy} \cdot \frac{1}{\Delta x} \approx \frac{1}{\Delta y} \quad (56)$$

We elect to use the former, because this reflects the distribution of the events generated by `circe2_generate` *inside* the bins as well. This quantity is more conveniently stored as a true two-dimensional array:

$$52c \quad \langle \text{circe2_channel members } 51b \rangle + \equiv \quad (50c) \quad \langle 51c \ 52e \rangle$$

$$\text{real(kind=default), dimension(:, :), allocatable} :: \text{val}$$

$$52d \quad \langle \text{circe2_division members } 52d \rangle \equiv \quad (50b) \quad 54b \triangleright$$

$$\text{real(kind=default), dimension(:), allocatable} :: \text{x}$$

$$52e \quad \langle \text{circe2_channel members } 51b \rangle + \equiv \quad (50c) \quad \langle 52c \ 53a \rangle$$

$$\text{logical} :: \text{triang}$$

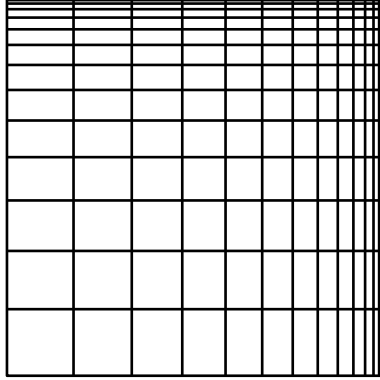


Figure 17: Almost factorizable distributions, like e^+e^- .

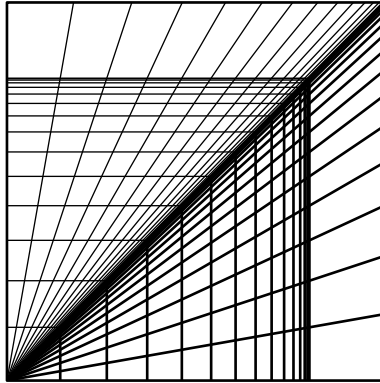


Figure 18: Symmetrical, strongly correlated distributions, e. g. with a ridge on the diagonal, like $\gamma\gamma$ at a γ -collider.

11.1 Channels

The number of available channels $\gamma\gamma$, $e^-\gamma$, e^-e^+ , etc. can be found with `size (circe2_state%ch)`. The particles that are described by this channel and their polarizations:

53a `<circe2_channel members 51b>+≡` (50c) `<52e 53b>`
`integer, dimension(2) :: pid, pol`

The integrated luminosity of the channel

53b `<circe2_channel members 51b>+≡` (50c) `<53a`
`real(kind=default) :: lumi`

The integrated luminosity of the channel

54a `<circe2_state members 51a>+≡` (50d) `<51a 55d>`
`real(kind=default), dimension(:), allocatable :: cwgt`

11.2 Maps

54b `<circe2_division members 52d>+≡` (50b) `<52d 54c>`
`integer, dimension(:), allocatable :: map`

54c `<circe2_division members 52d>+≡` (50b) `<54b 54d>`
`real(kind=default), dimension(:), allocatable :: y`

54d `<circe2_division members 52d>+≡` (50b) `<54c`
`real(kind=default), dimension(:), allocatable :: alpha, xi, eta, a, b`

12 Random Number Generation

We use the new WHIZARD interface.

54e `<circe2_declarations 50b>+≡` (49c) `<50d 54f>`
`public :: rng_type`
`type, abstract :: rng_type`
`contains`
`procedure(rng_generate), deferred :: generate`
`end type rng_type`

54f `<circe2_declarations 50b>+≡` (49c) `<54e 54g>`
`abstract interface`
`subroutine rng_generate (rng_obj, u)`
`import :: rng_type, default`
`class(rng_type), intent(inout) :: rng_obj`
`real(kind=default), intent(out) :: u`
`end subroutine rng_generate`
`end interface`

13 Event Generation

Generate a two-dimensional distribution for (x1,x2) according to the histogram for channel ic.

54g `<circe2_declarations 50b>+≡` (49c) `<54f 55b>`
`public :: circe2_generate`
`interface circe2_generate`
`module procedure circe2_generate_ph`
`end interface circe2_generate`

55a \langle circe2 implementation 55a $\rangle \equiv$ (49c) 55c \triangleright

```

subroutine circe2_generate_ph (c2s, rng, y, p, h)
  type(circe2_state), intent(in) :: c2s
  class(rng_type), intent(inout) :: rng
  real(kind=default), dimension(:), intent(out) :: y
  integer, dimension(:), intent(in) :: p
  integer, dimension(:), intent(in) :: h
  integer :: i, ic
   $\langle$ Find ic for p and h 56a $\rangle$ 
   $\langle$ Complain and return iff  $ic \leq 0$  56b $\rangle$ 
  call circe2_generate_channel (c2s%ch(ic), rng, y)
end subroutine circe2_generate_ph
 $\langle$ Separator 49d $\rangle$ 

```

55b \langle circe2 declarations 50b $\rangle + \equiv$ (49c) \triangleleft 54g 58c \triangleright

```

interface circe2_generate
  module procedure circe2_generate_channel
end interface circe2_generate

```

55c \langle circe2 implementation 55a $\rangle + \equiv$ (49c) \triangleleft 55a 57b \triangleright

```

subroutine circe2_generate_channel (ch, rng, y)
  type(circe2_channel), intent(in) :: ch
  class(rng_type), intent(inout) :: rng
  real(kind=default), dimension(:), intent(out) :: y
  integer :: i, d, ibot, itop
  integer, dimension(2) :: ib
  real(kind=default), dimension(2) :: x, v
  real(kind=default) :: u, tmp
  call rng%generate (u)
   $\langle$ Do a binary search for  $wgt(i-1) \leq u < wgt(i)$  56c $\rangle$ 
   $\langle$ ib  $\leftarrow$  i 52b $\rangle$ 
   $\langle$  $x \in [x(ib-1), x(ib)]$  56d $\rangle$ 
  y = circe2_map (ch%d, x, ib)
   $\langle$ Inverse triangle map 58a $\rangle$ 
end subroutine circe2_generate_channel
 $\langle$ Separator 49d $\rangle$ 

```

55d \langle circe2_state members 51a $\rangle + \equiv$ (50d) \triangleleft 54a

```

integer :: polspt

```

55e \langle circe2 parameters 55e $\rangle \equiv$ (49c)

```

integer, parameter :: POLAVG = 1, POLHEL = 2, POLGEN = 3

```

A linear search for a matching channel should suffice, because the number of channels nc will always be a small number. The most popular channels should be first in the list, anyway.

56a $\langle \text{Find ic for p and h 56a} \rangle \equiv$ (55a 60d)

```

ic = 0
if ((c2s%polcpt == POLAVG .or. c2s%polcpt == POLGEN) .and. any (h /= 0)) then
  write (*, '(2A)') 'circe2: current beam description ', &
    'supports only polarization averages'
else if (c2s%polcpt == POLHEL .and. any (h == 0)) then
  write (*, '(2A)') 'circe2: polarization averages ', &
    'not supported by current beam description'
else
  do i = 1, size (c2s%ch)
    if (all (p == c2s%ch(i)%pid .and. h == c2s%ch(i)%pol)) then
      ic = i
    end if
  end do
end if

```

56b $\langle \text{Complain and return iff ic} \leq 0 \text{ 56b} \rangle \equiv$ (55a)

```

if (ic <= 0) then
  write (*, '(A,2I4,A,2I3)') &
    'circe2: no channel for particles', p, &
    ' and polarizations', h
  y = - huge (y)
  return
end if

```

The number of bins is typically *much* larger and we must use a binary search to get a reasonable performance.

56c $\langle \text{Do a binary search for } \text{wgt}(i-1) \leq u < \text{wgt}(i) \text{ 56c} \rangle \equiv$ (55c)

```

ibot = 0
itop = ubound (ch%wgt, dim=1)
do
  if (itop <= ibot + 1) then
    i = ibot + 1
    exit
  else
    i = (ibot + itop) / 2
    if (u < ch%wgt(i)) then
      itop = i
    else
      ibot = i
    end if
  end if
end do

```

56d $\langle x \in [x(ib-1), x(ib)] \text{ 56d} \rangle \equiv$ (55c)


```

call rng%generate (v(1))
call rng%generate (v(2))
do d = 1, 2
  x(d) = ch%d(d)%x(ib(d))*v(d) + ch%d(d)%x(ib(d)-1)*(1-v(d))
end do

```

The NAG compiler is picky and doesn't like $(-0)^\alpha$ at all.

57a $\langle y \leftarrow (a(x - \xi))^\alpha / b + \eta$ 57a \equiv (57b)

```

z = d%a(b) * (x - d%xi(b))
if (abs (z) <= tiny (z)) then
  z = abs (z)
end if
y = z**d%alpha(b) / d%b(b) + d%eta(b)

```

57b $\langle \text{circe2 implementation 55a} \rangle + \equiv$ (49c) $\langle 55c$ 57c \rangle

```

elemental function circe2_map (d, x, b) result (y)
  type(circe2_division), intent(in) :: d
  real(kind=default), intent(in) :: x
  integer, intent(in) :: b
  real(kind=default) :: y
  real(kind=default) :: z
  select case (d%map(b))
  case (0)
    y = x
  case (1)
     $\langle y \leftarrow (a(x - \xi))^\alpha / b + \eta$  57a  $\rangle$ 
  case (2)
    y = d%a(b) * tan (d%a(b)*(x-d%xi(b)) / d%b(b)**2) + d%eta(b)
  case default
    y = - huge (y)
  end select
end function circe2_map

```

cf. (56)

57c $\langle \text{circe2 implementation 55a} \rangle + \equiv$ (49c) $\langle 57b$ 58d \rangle

```

elemental function circe2_jacobian (d, y, b) result (j)
  type(circe2_division), intent(in) :: d
  real(kind=default), intent(in) :: y
  integer, intent(in) :: b
  real(kind=default) :: j
  select case (d%map(b))
  case (0)
    j = 1
  case (1)
    j = d%b(b) / (d%a(b)*d%alpha(b)) &

```

```

        * (d%b(b)*(y-d%eta(b)))*(1/d%alpha(b)-1)
    case (2)
        j = d%b(b)**2 / ((y-d%eta(b))**2 + d%a(b)**2)
    case default
        j = - huge (j)
    end select
end function circe2_jacobian

```



There's still something wrong with *unweighted* events for the case that there is a triangle map *together* with a non-trivial $x(2) \rightarrow y(2)$ map. *Fix this!!!*

58a \langle Inverse triangle map 58a $\rangle \equiv$ (55c)

```

    if (ch%triang) then
        y(2) = y(1) * y(2)
         $\langle$ Swap y(1) and y(2) in 50% of the cases 58b $\rangle$ 
    end if

```

58b \langle Swap y(1) and y(2) in 50% of the cases 58b $\rangle \equiv$ (58a)

```

    call rng%generate (u)
    if (2*u >= 1) then
        tmp = y(1)
        y(1) = y(2)
        y(2) = tmp
    end if

```

14 Channel selection

We could call `circe2_generate` immediately, but then `circe2_generate` and `cir2_choose_channel` would have the same calling conventions and might have caused a lot of confusion.

58c \langle circe2 declarations 50b $\rangle + \equiv$ (49c) \langle 55b 59a \rangle

```

    public :: circe2_choose_channel
    interface circe2_choose_channel
        module procedure circe2_choose_channel
    end interface circe2_choose_channel

```

58d \langle circe2 implementation 55a $\rangle + \equiv$ (49c) \langle 57c 59b \rangle

```

    subroutine circe2_choose_channel (c2s, rng, p, h)
        type(circe2_state), intent(in) :: c2s
        class(rng_type), intent(inout) :: rng
        integer, dimension(:), intent(out) :: p, h
        integer :: ic, ibot, itop

```

```

real(kind=default) :: u
call rng%generate (u)
ibot = 0
itop = size (c2s%ch)
do
  if (itop <= ibot + 1) then
    ic = ibot + 1
    p = c2s%ch(ic)%pid
    h = c2s%ch(ic)%pol
    return
  else
    ic = (ibot + itop) / 2
    if (u < c2s%cwgt(ic)) then
      itop = ic
    else
      ibot = ic
    end if
  end if
end do
write (*, '(A)') 'circe2: internal error'
stop
end subroutine circe2_choose_channel

```

Below, we will always have $h = 0$. but we don't have to check this explicitly, because `circe2_density_matrix` will do it anyway. The procedure could be made more efficient, since most of `circe2_density_matrix` is undoing parts of `circe2_generate`.

59a $\langle \text{circe2 declarations 50b} \rangle + \equiv$ (49c) $\langle 58c \ 60a \rangle$

```

public :: circe2_generate_polarized
interface circe2_generate_polarized
  module procedure circe2_generate_polarized
end interface circe2_generate_polarized

```

59b $\langle \text{circe2 implementation 55a} \rangle + \equiv$ (49c) $\langle 58d \ 60b \rangle$

```

subroutine circe2_generate_polarized (c2s, rng, p, pol, x)
  type(circe2_state), intent(in) :: c2s
  class(rng_type), intent(inout) :: rng
  integer, dimension(:), intent(out) :: p
  real(kind=default), intent(out) :: pol(0:3,0:3)
  real(kind=default), dimension(:), intent(out) :: x
  integer, dimension(2) :: h
  integer :: i1, i2
  real(kind=default) :: pol00
  call circe2_choose_channel (c2s, rng, p, h)

```

```

    call circe2_generate (c2s, rng, x, p, h)
    call circe2_density_matrix (c2s, pol, p, x)
    pol00 = pol(0,0)
    do i1 = 0, 3
        do i2 = 0, 3
            pol(i1,i2) = pol(i1,i2) / pol00
        end do
    end do
end subroutine circe2_generate_polarized

```

15 Luminosity

60a \langle circe2 *declarations* 50b $\rangle + \equiv$ (49c) \langle 59a 60c \rangle

```

public :: circe2_luminosity

```

60b \langle circe2 *implementation* 55a $\rangle + \equiv$ (49c) \langle 59b 60d \rangle

```

function circe2_luminosity (c2s, p, h)
    type(circe2_state), intent(in) :: c2s
    integer, dimension(:), intent(in) :: p
    integer, dimension(:), intent(in) :: h
    real(kind=default) :: circe2_luminosity
    integer :: ic
    circe2_luminosity = 0
    do ic = 1, size (c2s%ch)
        if (      all (p == c2s%ch(ic)%pid .or. p == 0) &
            .and. all (h == c2s%ch(ic)%pol .or. h == 0)) then
            circe2_luminosity = circe2_luminosity + c2s%ch(ic)%lumi
        end if
    end do
end function circe2_luminosity
 $\langle$ Separator 49d $\rangle$ 

```

16 2D-Distribution

60c \langle circe2 *declarations* 50b $\rangle + \equiv$ (49c) \langle 60a 61a \rangle

```

public :: circe2_distribution
interface circe2_distribution
    module procedure circe2_distribution_ph
end interface circe2_distribution

```

60d \langle circe2 *implementation* 55a $\rangle + \equiv$ (49c) \langle 60b 61b \rangle

```

function circe2_distribution_ph (c2s, p, h, yy)

```

```

type(circe2_state), intent(in) :: c2s
integer, dimension(:), intent(in) :: p
real(kind=default), dimension(:), intent(in) :: yy
integer, dimension(:), intent(in) :: h
real(kind=default) :: circe2_distribution_ph
integer :: i, ic
<Find ic for p and h 56a>
if (ic <= 0) then
    circe2_distribution_ph = 0
else
    circe2_distribution_ph = circe2_distribution_channel (c2s%ch(ic), yy)
end if
end function circe2_distribution_ph
<Separator 49d>
61a <circe2 declarations 50b>+≡ (49c) <60c 63a>
    interface circe2_distribution
        module procedure circe2_distribution_channel
    end interface circe2_distribution
61b <circe2 implementation 55a>+≡ (49c) <60d 63b>
    function circe2_distribution_channel (ch, yy)
        type(circe2_channel), intent(in) :: ch
        real(kind=default), dimension(:), intent(in) :: yy
        real(kind=default) :: circe2_distribution_channel
        real(kind=default), dimension(2) :: y
        integer :: d, ibot, itop
        integer, dimension(2) :: ib
        <y ← yy 62a>
        if (
            y(1) < ch%d(1)%y(0) &
            .or. y(1) > ch%d(1)%y(ubound (ch%d(1)%y, dim=1)) &
            .or. y(2) < ch%d(2)%y(0) &
            .or. y(2) > ch%d(2)%y(ubound (ch%d(2)%y, dim=1))) then
            circe2_distribution_channel = 0
            return
        end if
        <Do a binary search for  $y(ib-1) \leq y < y(ib)$  62c>
        circe2_distribution_channel = &
            ch%val(ib(1),ib(2)) * product (circe2_jacobian (ch%d, y, ib))
        <Apply Jacobian for triangle map 62b>
    end function circe2_distribution_channel
<Separator 49d>

```

The triangle map

$$\begin{aligned} \tau : \{(x_1, x_2) \in [0, 1] \times [0, 1] : x_2 \leq x_1\} &\rightarrow [0, 1] \times [0, 1] \\ (x_1, x_2) &\mapsto (y_1, y_2) = (x_1, x_1 x_2) \end{aligned} \quad (57)$$

and its inverse

$$\begin{aligned} \tau^{-1} : [0, 1] \times [0, 1] &\rightarrow \{(x_1, x_2) \in [0, 1] \times [0, 1] : x_2 \leq x_1\} \\ (y_1, y_2) &\mapsto (x_1, x_2) = (y_1, y_2/y_1) \end{aligned} \quad (58)$$

$$62a \quad \langle y \leftarrow yy \ 62a \rangle \equiv \quad (61b)$$

```

    if (ch%triang) then
        y(1) = maxval (yy)
        y(2) = minval (yy) / y(1)
    else
        y = yy
    end if

```

with the jacobian $J^*(y_1, y_2) = 1/y_2$ from

$$dx_1 \wedge dx_2 = \frac{1}{y_2} \cdot dy_1 \wedge dy_2 \quad (59)$$

$$62b \quad \langle \text{Apply Jacobian for triangle map } 62b \rangle \equiv \quad (61b)$$

```

    if (ch%triang) then
        circe2_distribution_channel = circe2_distribution_channel / y(1)
    end if

```

Careful: the loop over d *must* be executed sequentially, because of the shared local variables `ibot` and `itop`.

$$62c \quad \langle \text{Do a binary search for } y(ib-1) \leq y < y(ib) \ 62c \rangle \equiv \quad (61b)$$

```

do d = 1, 2
    ibot = 0
    itop = ubound (ch%d(d)%x, dim=1)
    search: do
        if (itop <= ibot + 1) then
            ib(d) = ibot + 1
            exit search
        else
            ib(d) = (ibot + itop) / 2
            if (y(d) < ch%d(d)%y(ib(d))) then
                itop = ib(d)
            else
                ibot = ib(d)
            end if
        end if
    end do search
end do

```

63a *<circe2 declarations 50b>+≡* (49c) <61a 63d>
 public :: circe2_density_matrix

63b *<circe2 implementation 55a>+≡* (49c) <61b 63f>
 subroutine circe2_density_matrix (c2s, pol, p, x)
 type(circe2_state), intent(in) :: c2s
 real(kind=default), dimension(0:,0:), intent(out) :: pol
 integer, dimension(:), intent(in) :: p
 real(kind=default), dimension(:), intent(in) :: x
 <Test support for density matrices 63c>
 print *, 'circe2: circe2_density_matrix not implemented yet!'
 if (p(1) < p(2) .and. x(1) < x(2)) then
 ! nonsense test to suppress warning
 end if
 pol = 0
 end subroutine circe2_density_matrix
 <Separator 49d>

63c *<Test support for density matrices 63c>≡* (63b)
 if (c2s%polcpt /= POLGEN) then
 write (*, '(2A)') 'circe2: current beam ', &
 'description supports no density matrices'
 return
 end if

17 Reading Files

63d *<circe2 declarations 50b>+≡* (49c) <63a
 public :: circe2_load
 <Error codes for circe2_load 63e>

63e *<Error codes for circe2_load 63e>≡* (63d)
 integer, parameter, public :: &
 EOK = 0, EFILE = -1, EMATCH = -2, EFORMT = -3, ESIZE = -4

63f *<circe2 implementation 55a>+≡* (49c) <63b 65b>
 subroutine circe2_load (c2s, file, design, roots, ierror)
 type(circe2_state), intent(out) :: c2s
 character(len=*), intent(in) :: file, design
 real(kind=default), intent(in) :: roots
 integer, intent(out) :: ierror
 character(len=72) :: buffer, fdesign, fpolsp
 real(kind=default) :: froots
 integer :: lun, loaded, prefix

```

logical match
  <Local variables in circe2_load 66a>
  <Find free logical unit for lun 69a>
  if (lun < 0) then
    write (*, '(A)') 'circe2_load: no free unit'
    ierror = ESIZE
    return
  end if
  loaded = 0
  <Open name for reading on lun 67d>
  if (ierror .gt. 0) then
    write (*, '(2A)') 'circe2_load: ', <Version 49a>
  end if
  prefix = index (design, '*') - 1
  do
    <Skip comments until CIRCE2 68b>
    if (buffer(8:15) == 'FORMAT#1') then
      read (lun, *)
      read (lun, *) fdesign, froots
      <Check if design and fdesign do match 64>
      if (match .and. abs (froots - roots) <= 1) then
        <Load histograms 65a>
        loaded = loaded + 1
      else
        <Skip data until ECRIC2 68c>
        cycle
      end if
    else
      write (*, '(2A)') 'circe2_load: invalid format: ', buffer(8:72)
      ierror = EFORMAT
      return
    end if
    <Check for ECRIC2 68d>
  end do
end subroutine circe2_load
<Separator 49d>
64 <Check if design and fdesign do match 64>≡ (63f)
   match = .false.
   if (fdesign == design) then
     match = .true.
   else if (prefix == 0) then
     match = .true.
   else if (prefix .gt. 0) then

```



```

        if (fdesign(1:min(prefix,len(fdesign))) &
            == design(1:min(prefix,len(design)))) then
            match = .true.
        end if
    end if

65a  <Load histograms 65a>≡ (63f)
    read (lun, *)
    read (lun, *) nc, fpolsp
    allocate (c2s%ch(nc), c2s%cwgt(0:nc))
    <Decode polarization support 65c>
    c2s%cwgt(0) = 0
    do ic = 1, nc
        call circe2_load_channel (c2s%ch(ic), c2s%polspt, lun, ierror)
        c2s%cwgt(ic) = c2s%cwgt(ic-1) + c2s%ch(ic)%lumi
    end do
    c2s%cwgt = c2s%cwgt / c2s%cwgt(nc)

65b  <circe2 implementation 55a>+≡ (49c) <63f
    subroutine circe2_load_channel (ch, polspt, lun, ierror)
        type(circe2_channel), intent(out) :: ch
        integer, intent(in) :: polspt, lun
        integer, intent(out) :: ierror
        integer :: d, i, ib
        integer :: i1, i2
        integer, dimension(2) :: nb
        real(kind=default) :: w
        <Load channel ch 66b>
        <Load divisions x 66e>
        <Calculate y 67a>
        <Load weights wgt and val 67b>
    end subroutine circe2_load_channel

65c  <Decode polarization support 65c>≡ (65a)
    if (fpolsp(1:1)=='a' .or. fpolsp(1:1)=='A') then
        c2s%polspt = POLAVG
    else if (fpolsp(1:1)=='h' .or. fpolsp(1:1)=='H') then
        c2s%polspt = POLHEL
    else if (fpolsp(1:1)=='d' .or. fpolsp(1:1)=='D') then
        c2s%polspt = POLGEN
    else
        write (*, '(A,I5)') 'circe2_load: invalid polarization support: ', fpolsp
        ierror = EFORMT
        return
    end if

```

```

66a  <Local variables in circe2_load 66a>≡ (63f) 67c>
      integer :: ic, nc

66b  <Load channel ch 66b>≡ (65b) 66d>
      read (lun, *)
      read (lun, *) ch%pid(1), ch%pol(1), ch%pid(2), ch%pol(2), ch%lumi
      <Check polarization support 66c>

66c  <Check polarization support 66c>≡ (66b)
      if (polspt == POLAVG .and. any (ch%pol /= 0)) then
        write (*, '(A)') 'circe2_load: expecting averaged polarization'
        ierror = EFORMT
        return
      else if (polspt == POLHEL .and. any (ch%pol == 0)) then
        write (*, '(A)') 'circe2_load: expecting helicities'
        ierror = EFORMT
        return
      else if (polspt == POLGEN) then
        write (*, '(A)') 'circe2_load: general polarizations not supported yet'
        ierror = EFORMT
        return
      else if (polspt == POLGEN .and. any (ch%pol /= 0)) then
        write (*, '(A)') 'circe2_load: expecting pol = 0'
        ierror = EFORMT
        return
      end if

66d  <Load channel ch 66b>+≡ (65b) <66b
      read (lun, *)
      read (lun, *) nb, ch%triang

66e  <Load divisions x 66e>≡ (65b)
      do d = 1, 2
        read (lun, *)
        allocate (ch%d(d)%x(0:nb(d)), ch%d(d)%y(0:nb(d)))
        allocate (ch%d(d)%map(nb(d)), ch%d(d)%alpha(nb(d)))
        allocate (ch%d(d)%xi(nb(d)), ch%d(d)%eta(nb(d)))
        allocate (ch%d(d)%a(nb(d)), ch%d(d)%b(nb(d)))
        read (lun, *) ch%d(d)%x(0)
        do ib = 1, nb(d)
          read (lun, *) ch%d(d)%x(ib), ch%d(d)%map(ib), &
            ch%d(d)%alpha(ib), ch%d(d)%xi(ib), ch%d(d)%eta(ib), &
            ch%d(d)%a(ib), ch%d(d)%b(ib)
          if (ch%d(d)%map(ib) < 0 .or. ch%d(d)%map(ib) > 2) then
            write (*, '(A,I3)') 'circe2_load: invalid map: ', ch%d(d)%map(ib)
            ierror = EFORMT

```

```

        return
    end if
end do
end do

```

The boundaries are guaranteed to be fixed points of the maps only if the boundaries are not allowed to float. This doesn't affect the unweighted events, because they never see the codomain grid, but distribution would be distorted significantly. In the following sums *i1* and *i2* run over the maps, while *i* runs over the boundaries.

⚡ An alternative would be to introduce sentinels `alpha(1,0,:)`, `xi(1,0,:)`, etc.

67a $\langle \text{Calculate } y \text{ 67a} \rangle \equiv$ (65b)

```

do d = 1, 2
  do i = 0, ubound (ch%d(d)%x, dim=1)
    ch%d(d)%y(i) = circe2_map (ch%d(d), ch%d(d)%x(i), max (i, 1))
  end do
end do

```

cf. (56)

67b $\langle \text{Load weights wgt and val 67b} \rangle \equiv$ (65b)

```

read (lun, *)
allocate (ch%wgt(0:product(nb)), ch%val(nb(1),nb(2)))
ch%wgt(0) = 0
do i = 1, ubound (ch%wgt, dim=1)
  read (lun, *) w
  ch%wgt(i) = ch%wgt(i-1) + w
   $\langle (i1,i2) \leftarrow i \text{ 52a} \rangle$ 
  ch%val(i1,i2) = w &
    / ( (ch%d(1)%x(i1) - ch%d(1)%x(i1-1)) &
      * (ch%d(2)%x(i2) - ch%d(2)%x(i2-1)))
end do
ch%wgt(ubound (ch%wgt, dim=1)) = 1

```

67c $\langle \text{Local variables in circe2_load 66a} \rangle + \equiv$ (63f) $\langle 66a \text{ } 68a \rangle$

17.1 Auxiliary Code For Reading Files

67d $\langle \text{Open name for reading on lun 67d} \rangle \equiv$ (63f)

```

open (unit = lun, file = file, status = 'old', iostat = status)
if (status /= 0) then
  write (*, '(2A)') 'circe2_load: can't open ', file
  ierror = EFILE

```

```

        return
    end if

68a  <Local variables in circe2_load 66a>+≡ (63f) <67c 69b>
        integer :: status
    The outer do loop is never repeated!
68b  <Skip comments until CIRCE2 68b>≡ (63f)
        find_circe2: do
            skip_comments: do
                read (lun, '(A)', iostat = status) buffer
                if (status /= 0) then
                    close (unit = lun)
                    if (loaded > 0) then
                        ierror = EOK
                    else
                        ierror = EMATCH
                    end if
                    return
                else
                    if (buffer(1:6) == 'CIRCE2') then
                        exit find_circe2
                    else if (buffer(1:1) == '!') then
                        if (ierror > 0) then
                            write (*, '(A)') buffer
                        end if
                    else
                        exit skip_comments
                    end if
                end if
            end do skip_comments
            write (*, '(A)') 'circe2_load: invalid file'
            ierror = EFORMT
            return
        end do find_circe2

68c  <Skip data until ECRIC2 68c>≡ (63f)
        skip_data: do
            read (lun, *) buffer
            if (buffer(1:6) == 'ECRIC2') then
                exit skip_data
            end if
        end do skip_data

68d  <Check for ECRIC2 68d>≡ (63f)

```

```

        read (lun, '(A)') buffer
        if (buffer(1:6) /= 'ECRIC2') then
            write (*, '(A)') 'circe2_load: invalid file'
            ierror = EFORMT
            return
        end if
69a  <Find free logical unit for lun 69a>≡ (63f 72d)
        scan: do lun = 10, 99
            inquire (unit = lun, exist = exists, opened = isopen, iostat = status)
            if (status == 0 .and. exists .and. .not.isopen) exit scan
        end do scan
        if (lun > 99) lun = -1
69b  <Local variables in circe2_load 66a>+≡ (63f) <68a
        logical exists, isopen

```

A Tests and Examples

A.1 Object-Oriented interface to tao_random_numbers

We need the object oriented interface to `tao_random_numbers` to be able to talk to the WHIZARD

```

69c  <tao_random_objects.f90 69c>≡
        module tao_random_objects
            use kinds
            use tao_random_numbers
            use circe2
            implicit none
            private
            <tao_random_objects declarations 69d>
        contains
            <tao_random_objects implementation 70a>
        end module tao_random_objects
69d  <tao_random_objects declarations 69d>≡ (69c)
        public :: rng_tao
        type, extends (rng_type) :: rng_tao
            integer :: seed = 0
            integer :: n_calls = 0
            type(tao_random_state) :: state
        contains
            procedure :: generate => rng_tao_generate
            procedure :: init => rng_tao_init

```

```

        end type rng_tao
70a  <tao_random_objects implementation 70a>≡ (69c) 70b>
        subroutine rng_tao_generate (rng_obj, u)
            class(rng_tao), intent(inout) :: rng_obj
            real(default), intent(out) :: u
            call tao_random_number (rng_obj%state, u)
            rng_obj%n_calls = rng_obj%n_calls + 1
        end subroutine rng_tao_generate
70b  <tao_random_objects implementation 70a>+≡ (69c) <70a
        subroutine rng_tao_init (rng_obj, seed)
            class(rng_tao), intent(inout) :: rng_obj
            integer, intent(in) :: seed
            rng_obj%seed = seed
            call tao_random_create (rng_obj%state, seed)
        end subroutine rng_tao_init

```

A.2 circe2_generate: Standalone Generation of Samples

```

70c  <circe2_generate.f90 70c>≡
        program circe2_generate_program
            use kinds
            use circe2
            use tao_random_objects
            implicit none
            type(circe2_state) :: c2s
            type(rng_tao), save :: rng
            character(len=1024) :: filename, design, buffer
            integer :: status, nevents, seed
            real(kind=default) :: roots
            real(kind=default), dimension(2) :: x
            integer :: p1, p2, i, ierror
            <Process command line arguments for circe2_generate_program 71a>
            call circe2_load (c2s, trim(filename), trim(design), roots, ierror)
            if (ierror /= 0) then
                print *, "circe2_generate: failed to load design ", trim(design), &
                    " for ", real (roots, kind=single), &
                    " GeV from ", trim(filename)
                stop
            end if
            do i = 1, nevents
                call circe2_generate (c2s, rng, x, [p1, p2], [0, 0])
            end do
        end program

```

```

        write (*, '(F12.10,1X,F12.10,1X,F3.1)') x, 1.0_default
    end do
contains
    <Module procedures for circe2_generate_program 72c>
end program circe2_generate_program

71a <Process command line arguments for circe2_generate_program 71a>≡ (70c) 71b>
    call get_command_argument (1, value = filename, status = status)
    if (status /= 0) filename = ""

71b <Process command line arguments for circe2_generate_program 71a>+≡ (70c) <71a 71c>
    call get_command_argument (2, value = design, status = status)
    if (status /= 0) design = ""
    if (filename == "" .or. design == "") then
        print *, "usage: circe2_generate filename design [roots] [p1] [p2] [#events] [see]"
        stop
    end if

71c <Process command line arguments for circe2_generate_program 71a>+≡ (70c) <71b 71d>
    call get_command_argument (3, value = buffer, status = status)
    if (status == 0) then
        read (buffer, *, iostat = status) roots
        if (status /= 0) roots = 500
    else
        roots = 500
    end if

71d <Process command line arguments for circe2_generate_program 71a>+≡ (70c) <71c 71e>
    call get_command_argument (4, value = buffer, status = status)
    if (status == 0) then
        read (buffer, *, iostat = status) p1
        if (status /= 0) nevents = 1000
    else
        p1 = 11
    end if

71e <Process command line arguments for circe2_generate_program 71a>+≡ (70c) <71d 72a>
    call get_command_argument (5, value = buffer, status = status)
    if (status == 0) then
        read (buffer, *, iostat = status) p2
        if (status /= 0) nevents = 1000
    else
        p2 = -11
    end if

```

```

72a  <Process command line arguments for circe2_generate_program 71a>+≡      (70c) <71e 72b>
      call get_command_argument (6, value = buffer, status = status)
      if (status == 0) then
        read (buffer, *, iostat = status) nevents
        if (status /= 0) nevents = 1000
      else
        nevents = 1000
      end if

72b  <Process command line arguments for circe2_generate_program 71a>+≡      (70c) <72a
      call get_command_argument (7, value = buffer, status = status)
      if (status == 0) then
        read (buffer, *, iostat = status) seed
        if (status == 0) then
          call random2_seed (rng, seed)
        else
          call random2_seed (rng)
        end if
      else
        call random2_seed (rng)
      end if

72c  <Module procedures for circe2_generate_program 72c>≡                      (70c)
      subroutine random2_seed (rng, seed)
        class(rng_tao), intent(inout) :: rng
        integer, intent(in), optional :: seed
        integer, dimension(8) :: date_time
        integer :: seed_value
        if (present (seed)) then
          seed_value = seed
        else
          call date_and_time (values = date_time)
          seed_value = product (date_time)
        endif
        call rng%init (seed_value)
      end subroutine random2_seed

```

A.3 circe2_ls: Listing File Contents

Here's a small utility program for listing the contents of `circe2` data files. It performs *no* verification and assumes that the file is in the correct format (cf. table 2).

```

72d  <circe2_ls.f90 72d>≡
      ! circe2_ls.f90 -- beam spectra for linear colliders and photon colliders

```


<Copyleft notice 50a>

<Separator 49d>

```
program circe2_ls
  use circe2
  use kinds
  implicit none
  integer :: i, lun
  character(len=132) :: buffer
  character(len=60) :: design, polspt
  integer :: pid1, hel1, pid2, hel2, nc
  real(kind=default) :: roots, lumi
  integer :: status
  logical :: exists, isopen
  character(len=1024) :: filename
<Find free logical unit for lun 69a>
  if (lun < 0) then
    write (*, '(A)') 'circe2_ls: no free unit'
    stop
  end if
  files: do i = 1, command_argument_count ()
    call get_command_argument (i, value = filename, status = status)
    if (status /= 0) then
      exit files
    else
      open (unit = lun, file = filename, status = 'old', iostat = status)
      if (status /= 0) then
        write (*, "(A,1X,A)") "circe2: can't open", trim(filename)
      else
        write (*, "(A,1X,A)") "file:", trim(filename)
        lines: do
          read (lun, '(A)', iostat = status) buffer
          if (status /= 0) exit lines
          if (buffer(1:7) == 'design,') then
            read (lun, *) design, roots
            read (lun, *)
            read (lun, *) nc, polspt
            <Write design/beam data 74a>
            <Write channel header 74b>
          else if (buffer(1:5) == 'pid1,') then
            read (lun, *) pid1, hel1, pid2, hel2, lumi
            <Write channel data 74c>
          end if
        end do lines
      end do
    end if
  end do files
```

```

        end if
        close (unit = lun)
    end if
end do files
end program circe2_ls
<Separator 49d>
74a  <Write design/beam data 74a>≡ (72d)
      write (*, '(A,1X,A)')      ,      design:', trim(design)
      write (*, '(A,1X,F7.1)')    ,      sqrt(s):', roots
      write (*, '(A,1X,I3)')      ,      #channels:', nc
      write (*, '(A,1X,A)')      ,      polarization:', trim(polcpt)
74b  <Write channel header 74b>≡ (72d)
      write (*, '(4X,4(A5,2X),A)') &
          'pid#1', 'hel#1', 'pid#2', 'hel#2', 'luminosity / (10^32cm^-2sec^-1)'
74c  <Write channel data 74c>≡ (72d)
      write (*, '(4X,4(I5,2X),F10.2)') pid1, hel1, pid2, hel2, lumi

```

A.4 β -distributions

We need a fast generator of β -distributions:

$$\beta_{x_{\min}, x_{\max}}^{a,b}(x) = x^{a-1}(1-x)^{b-1} \cdot \frac{\Theta(x_{\max} - x)\Theta(x - x_{\min})}{I(x_{\min}, a, b) - I(x_{\max}, a, b)} \quad (60)$$

with the *incomplete Beta-function* I :

$$I(x, a, b) = \int_x^1 d\xi \xi^{a-1}(1-\xi)^{b-1} \quad (61)$$

$$I(0, a, b) = B(a, b) = \frac{\Gamma(a)\Gamma(b)}{\Gamma(a+b)} \quad (62)$$

This problem has been studied extensively [2] and we can use an algorithm [1] that is very fast for $0 < a \leq 1 \leq b$, which turns out to be the case in our application.

```

74d  <circe2_moments_library declarations 74d>≡ (91a) 79c>
      public :: generate_beta
74e  <circe2_moments_library implementation 74e>≡ (91a) 79e>
      subroutine generate_beta (rng, x, xmin, xmax, a, b)
        class(rng_type), intent(inout) :: rng
        real(kind=default), intent(out) :: x
        real(kind=default), intent(in) :: xmin, xmax, a, b

```

```

real(kind=default) :: t, p, u, umin, umax, w
<Check a and b 75a>
<Set up generate_beta parameters 75b>
do
  <Generate a trial x and calculate its weight w 76a>
  call rng%generate (u)
  if (w > u) exit
end do
end subroutine generate_beta

```

In fact, this algorithm works for $0 < a \leq 1 \leq b$ only:

```

75a  <Check a and b 75a>≡ (74e)
      if (a >= 1 .or. b <= 1) then
        x = -1
        print *, 'ERROR: beta-distribution expects a<1<b'
        return
      end if

```

The trick is to split the interval $[0, 1]$ into two parts $[0, t]$ and $[t, 1]$. In these intervals we obviously have

$$x^{a-1}(1-x)^{b-1} \leq \begin{cases} x^{a-1} & \text{for } x \leq t \\ t^{a-1}(1-x)^{b-1} & \text{for } x \geq t \end{cases} \quad (63)$$

because we have assumed that $0 < a < 1 < b$. The integrals of the two dominating distributions are t^a/a and $t^{a-1}(1-t)^b/b$ respectively and therefore the probability for picking a random number from the first interval is

$$P(x \leq t) = \frac{bt}{bt + a(1-t)^b} \quad (64)$$

We postpone the discussion of the choice of t until later:

```

75b  <Set up generate_beta parameters 75b>≡ (74e) 76b>
      <Set up best value for t 77c>
      p = b*t / (b*t + a * (1 - t)**b)

```

The dominating distributions can be generated by simple mappings

$$\phi : [0, 1] \rightarrow [0, 1] \quad (65)$$

$$u \mapsto \begin{cases} t \left(\frac{u}{p} \right)^{\frac{1}{a}} & < t \text{ for } u < p \\ t & = t \text{ for } u = p \\ 1 - (1-t) \left(\frac{1-u}{1-p} \right)^{\frac{1}{b}} & > t \text{ for } u > p \end{cases} \quad (66)$$

The beauty of the algorithm is that we can use a single uniform deviate u for both intervals:

76a \langle Generate a trial x and calculate its weight w 76a $\rangle \equiv$ (74e)

```

call rng%generate (u)
u = umin + (umax - umin) * u
if (u <= p) then
  x = t * (u/p)**(1/a)
  w = (1 - x)**(b-1)
else
  x = 1 - (1 - t) * ((1 - u)/(1 - p))**(1/b)
  w = (x/t)**(a-1)
end if

```

The weights that are derived by dividing the distribution by the dominating distributions are already normalized correctly:

$$w : [0, 1] \rightarrow [0, 1] \quad (67)$$

$$x \mapsto \begin{cases} (1-x)^{b-1} & \in [(1-t)^{b-1}, 1] \text{ for } x \leq t \\ \left(\frac{x}{t}\right)^{a-1} & \in [t^{1-a}, 1] \text{ for } x \geq t \end{cases} \quad (68)$$

To derive $u_{\min, \max}$ from $x_{\min, \max}$ we can use ϕ^{-1} :

$$\phi^{-1} : [0, 1] \rightarrow [0, 1] \quad (69)$$

$$x \mapsto \begin{cases} p \left(\frac{x}{t}\right)^a & < p \text{ for } x < t \\ p & = p \text{ for } x = t \\ 1 - (1-p) \left(\frac{1-x}{1-t}\right)^b & > p \text{ for } x > t \end{cases} \quad (70)$$

We start with u_{\min} . For efficiency, we handle the most common cases (small x_{\min}) first:

76b \langle Set up generate_beta parameters 75b $\rangle + \equiv$ (74e) \langle 75b 77a \rangle

```

if (xmin <= 0) then
  umin = 0
elseif (xmin < t) then
  umin = p * (xmin/t)**a
elseif (xmin == t) then
  umin = p
elseif (xmin < 1) then
  umin = 1 - (1 - p) * ((1 - xmin)/(1 - t))**b
else
  umin = 1
endif

```

Same procedure for u_{\max} ; again, handle the most common cases (large x_{\max}) first:

77a $\langle \text{Set up generate_beta parameters 75b} \rangle + \equiv$ (74e) $\triangleleft 76b \ 77b \triangleright$

```

    if (xmax >= 1) then
        umax = 1
    elseif (xmax > t) then
        umax = 1 - (1 - p) * ((1 - xmax)/(1 - t))**b
    elseif (xmax == t) then
        umax = p
    elseif (xmax > 0) then
        umax = p * (xmax/t)**a
    else
        umax = 0
    endif

```

Check for absurd cases.

77b $\langle \text{Set up generate_beta parameters 75b} \rangle + \equiv$ (74e) $\triangleleft 77a$

```

    if (umax < umin) then
        x = -1
        return
    endif

```

It remains to choose the best value for t . The rejection efficiency ϵ of the algorithm is given by the ratio of the dominating distribution and the distribution

$$\frac{1}{\epsilon(t)} = \frac{B(a, b)}{ab} (bt^a + at^{a-1}(1-t)^b). \quad (71)$$

It is maximized for

$$bt - bt(1-t)^{b-1} + (a-1)(1-t)^b = 0 \quad (72)$$

This equation has a solution which can be determined numerically. While this determination is far too expensive compared to a moderate loss in efficiency, we could perform it once after fitting the coefficients a , b . Nevertheless, it has been shown,[1] that

$$t = \frac{1-a}{b+1-a} \quad (73)$$

results in non-vanishing efficiency for all values $1 < a \leq 1 \leq b$. Empirically we have found efficiencies of at least 80% for this choice, which is enough for our needs.

77c $\langle \text{Set up best value for } t \text{ 77c} \rangle \equiv$ (75b)

```

    t = (1 - a) / (b + 1 - a)

```

A.5 Sampling

```

78a  <circe2_moments.f90 78a>≡                               91a▷
      module sampling
        use kinds
        implicit none
        private
        <sampling declarations 78b>
        contains
        <sampling implementation 78d>
      end module sampling

78b  <sampling declarations 78b>≡                               (78a) 78c▷
      type sample
        integer :: n = 0
        real(kind=default) :: w = 0
        real(kind=default) :: w2 = 0
      end type sample
      public :: sample

78c  <sampling declarations 78b>+≡                               (78a) <78b 78f>
      public :: reset, record

78d  <sampling implementation 78d>≡                             (78a) 78e▷
      elemental subroutine reset (s)
        type(sample), intent(inout) :: s
        s%n = 0
        s%w = 0
        s%w2 = 0
      end subroutine reset

78e  <sampling implementation 78d>+≡                             (78a) <78d 79a>
      elemental subroutine record (s, w)
        type(sample), intent(inout) :: s
        real(kind=default), intent(in), optional :: w
        s%n = s%n + 1
        if (present (w)) then
          s%w = s%w + w
          s%w2 = s%w2 + w*w
        else
          s%w = s%w + 1
          s%w2 = s%w2 + 1
        endif
      end subroutine record

78f  <sampling declarations 78b>+≡                               (78a) <78c
      public :: mean, variance

```

79a \langle sampling implementation 78d $\rangle + \equiv$ (78a) \triangleleft 78e 79b \triangleright

```

    elemental function mean (s)
      type(sample), intent(in) :: s
      real(kind=default) :: mean
      mean = s%w / s%n
    end function mean

```

79b \langle sampling implementation 78d $\rangle + \equiv$ (78a) \triangleleft 79a

```

    elemental function variance (s)
      type(sample), intent(in) :: s
      real(kind=default) :: variance
      variance = (s%w2 / s%n - mean(s)**2) / s%n
      variance = max (variance, epsilon (variance))
    end function variance

```

A.6 Moments

This would probably be a good place for inheritance

79c \langle circe2_moments_library declarations 74d $\rangle + \equiv$ (91a) \triangleleft 74d 79d \triangleright

```

    type moment
      integer, dimension(2) :: n, m
      type(sample) :: sample = sample (0, 0.0_default, 0.0_default)
    end type moment
    public :: moment

```

79d \langle circe2_moments_library declarations 74d $\rangle + \equiv$ (91a) \triangleleft 79c 80a \triangleright

```

    public :: init_moments

```

79e \langle circe2_moments_library implementation 74e $\rangle + \equiv$ (91a) \triangleleft 74e 80b \triangleright

```

    subroutine init_moments (moments)
      type(moment), dimension(0:,0:,0:,0:), intent(inout) :: moments
      integer :: nx, mx, ny, my
      do nx = lbound(moments,1), ubound(moments,1)
        do mx = lbound(moments,2), ubound(moments,2)
          do ny = lbound(moments,3), ubound(moments,3)
            do my = lbound(moments,4), ubound(moments,4)
              moments(nx,mx,ny,my) = moment([nx,ny],[mx,my])
            end do
          end do
        end do
      end do
      call reset_moment (moments)
    end subroutine init_moments

```

80a `<circe2_moments_library declarations 74d>+≡` (91a) `<79d 80d>`
`public :: reset_moment, record_moment`

80b `<circe2_moments_library implementation 74e>+≡` (91a) `<79e 80c>`
`elemental subroutine reset_moment (m)`
`type(moment), intent(inout) :: m`
`call reset (m%sample)`
`end subroutine reset_moment`

If we were pressed for time, we would compute the moments by iterative multiplications instead by powers, of course. In any case, we would like to combine `x1` and `x2` into an array. Unfortunately this is not possible for `elemental` procedures. NB: the NAG compiler appears to want a more careful evaluation of the powers. We enforce `0.0**0 == 0`.

80c `<circe2_moments_library implementation 74e>+≡` (91a) `<80b 80e>`
`elemental subroutine record_moment (m, x1, x2, w)`
`type(moment), intent(inout) :: m`
`real(kind=default), intent(in) :: x1, x2`
`real(kind=default), intent(in), optional :: w`
`real(kind=default) :: p`
`p = pwr (x1, m%n(1)) * pwr (1-x1, m%m(1)) &`
`* pwr (x2, m%n(2)) * pwr (1-x2, m%m(2))`
`if (present (w)) p = p*w`
`call record (m%sample, p)`
`contains`
`pure function pwr (x, n)`
`real(kind=default), intent(in) :: x`
`integer, intent(in) :: n`
`real(kind=default) :: pwr`
`if (n == 0) then`
`pwr = 1`
`else`
`pwr = x**n`
`end if`
`end function pwr`
`end subroutine record_moment`

80d `<circe2_moments_library declarations 74d>+≡` (91a) `<80a 81b>`
`public :: mean_moment, variance_moment`

80e `<circe2_moments_library implementation 74e>+≡` (91a) `<80c 81a>`
`elemental function mean_moment (m)`
`type(moment), intent(in) :: m`
`real(kind=default) :: mean_moment`
`mean_moment = mean (m%sample)`
`end function mean_moment`

81a `<circe2_moments_library implementation 74e>+≡` (91a) `<80e 81c>`
`elemental function variance_moment (m)`
`type(moment), intent(in) :: m`
`real(kind=default) :: variance_moment`
`variance_moment = variance (m%sample)`
`end function variance_moment`

A.6.1 Moments of β -distributions

81b `<circe2_moments_library declarations 74d>+≡` (91a) `<80d 82a>`
`public :: beta_moment`

$$\begin{aligned}
M_{n,m}(a,b) &= \int_0^1 dx x^n (1-x)^m \beta_{0,1}^{a,b}(x) = \int_0^1 dx x^n (1-x)^m \frac{x^{a-1} (1-x)^{b-1}}{B(a,b)} \\
&= \frac{1}{B(a,b)} \int_0^1 dx x^{n+a-1} (1-x)^{m+b-1} = \frac{B(n+a, m+b)}{B(a,b)} \\
&= \frac{\Gamma(n+a)\Gamma(m+b)\Gamma(a+b)}{\Gamma(n+a+m+b)\Gamma(a)\Gamma(b)} = \frac{\Gamma(n+a)}{\Gamma(a)} \frac{\Gamma(m+b)}{\Gamma(b)} \frac{\Gamma(n+m+a+b)}{\Gamma(a+b)} \\
&= \frac{(a+n)(a+n-1)\cdots(a+1)a(b+m)(b+m-1)\cdots(b+1)b}{(a+b+n+m)(a+b+n+m-1)\cdots(a+b+1)(a+b)} \quad (74)
\end{aligned}$$

81c `<circe2_moments_library implementation 74e>+≡` (91a) `<81a 81d>`
`elemental function beta_moment (n, m, a, b)`
`integer, intent(in) :: n, m`
`real(kind=default), intent(in) :: a, b`
`real(kind=default) :: beta_moment`
`beta_moment = &`
`gamma_ratio (a, n) * gamma_ratio (b, m) / gamma_ratio (a+b, n+m)`
`end function beta_moment`

$$\frac{\Gamma(x+n)}{\Gamma(x)} = (x+n)(x+n-1)\cdots(x+1)x \quad (75)$$

81d `<circe2_moments_library implementation 74e>+≡` (91a) `<81c 82c>`
`elemental function gamma_ratio (x, n)`
`real(kind=default), intent(in) :: x`
`integer, intent(in) :: n`
`real(kind=default) :: gamma_ratio`
`integer :: i`
`gamma_ratio = 1`
`do i = 0, n - 1`
`gamma_ratio = gamma_ratio * (x + i)`
`end do`
`end function gamma_ratio`

A.6.2 Channels

- 82a $\langle \text{circe2_moments_library declarations 74d} \rangle + \equiv$ (91a) $\langle 81b \ 82b \rangle$
- ```

type channel
 real(kind=default) :: w = 1
 real(kind=default), dimension(2) :: a = 1, b = 1
 logical, dimension(2) :: delta = .false.
end type channel
public :: channel

```
- 82b  $\langle \text{circe2\_moments\_library declarations 74d} \rangle + \equiv$  (91a)  $\langle 82a \ 83b \rangle$
- ```

public :: generate_beta_multi, beta_moments_multi

```
- 82c $\langle \text{circe2_moments_library implementation 74e} \rangle + \equiv$ (91a) $\langle 81d \ 83a \rangle$
- ```

subroutine generate_beta_multi (rng, x, channels)
 class(rng_type), intent(inout) :: rng
 real(kind=default), dimension(:), intent(out) :: x
 type(channel), dimension(:), intent(in) :: channels
 real(kind=default) :: u, accum
 integer :: i, n
 $\langle \text{Select } n \text{ according to the weight } \text{channels}(n)\%w \ 82d \rangle$
 do i = 1, size (x)
 if (channels(n)%delta(i)) then
 x(i) = 1
 else
 if (channels(n)%a(i) == 1 .and. channels(n)%b(i) == 1) then
 call rng%generate (x(i))
 else if (channels(n)%b(i) < channels(n)%a(i)) then
 call generate_beta (rng, x(i), 0.0_default, 1.0_default, &
 channels(n)%b(i), channels(n)%a(i))
 x(i) = 1 - x(i)
 else
 call generate_beta (rng, x(i), 0.0_default, 1.0_default, &
 channels(n)%a(i), channels(n)%b(i))
 end if
 end if
 end do
end subroutine generate_beta_multi

```
- Subtlety: if the upper limit of the do loop were `size(channels)`, we could end up with `n` set to `size(channels)+1` when rounding errors produce `accum > sum(channels%w)`.
- 82d  $\langle \text{Select } n \text{ according to the weight } \text{channels}(n)\%w \ 82d \rangle + \equiv$  (82c)
- ```

call rng%generate (u)
u = u * sum (channels%w)

```

```

accum = 0
scan: do n = 1, size (channels) - 1
    accum = accum + channels(n)%w
    if (accum >= u) exit scan
end do scan

```

83a \langle circe2_moments_library *implementation* 74e $\rangle + \equiv$ (91a) \langle 82c 83c \rangle

```

pure function beta_moments_multi (n, m, channels)
    integer, intent(in), dimension(2) :: n, m
    type(channel), dimension(:), intent(in) :: channels
    real(kind=default) :: beta_moments_multi
    real(kind=default) :: w
    integer :: c, i
    beta_moments_multi = 0
    do c = 1, size (channels)
        w = channels(c)%w
        do i = 1, 2
            if (channels(c)%delta(i)) then
                if (m(i) > 0) w = 0
            else
                w = w * beta_moment (n(i), m(i), channels(c)%a(i), channels(c)%b(i))
            end if
        end do
        beta_moments_multi = beta_moments_multi + w
    end do
    beta_moments_multi = beta_moments_multi / sum (channels%w)
end function beta_moments_multi

```

A.6.3 Selftest

83b \langle circe2_moments_library *declarations* 74d $\rangle + \equiv$ (91a) \langle 82b 84a \rangle

```

public :: selftest

```

83c \langle circe2_moments_library *implementation* 74e $\rangle + \equiv$ (91a) \langle 83a 84b \rangle

```

subroutine selftest (rng, nevents)
    class(rng_type), intent(inout) :: rng
    integer, intent(in) :: nevents
    integer, parameter :: N = 1
    type(moment), dimension(0:N,0:N,0:N,0:N) :: moments
    integer :: i
    real(kind=default), dimension(2) :: x
    type(channel), dimension(:), allocatable :: channels
    call read_channels (channels)
    call init_moments (moments)

```

```

do i = 1, nevents
  call generate_beta_multi (rng, x, channels)
  call record_moment (moments, x(1), x(2))
end do
call report_results (moments, channels)
end subroutine selftest
84a <circe2_moments_library declarations 74d>+≡ (91a) <83b 84c>
  public :: random2_seed
84b <circe2_moments_library implementation 74e>+≡ (91a) <83c 84d>
  subroutine random2_seed (rng, seed)
    class(rng_tao), intent(inout) :: rng
    integer, intent(in), optional :: seed
    integer, dimension(8) :: date_time
    integer :: seed_value
    if (present (seed)) then
      seed_value = seed
    else
      call date_and_time (values = date_time)
      seed_value = product (date_time)
    endif
    call rng%init (seed_value)
  end subroutine random2_seed
84c <circe2_moments_library declarations 74d>+≡ (91a) <84a 85a>
  public :: read_channels
84d <circe2_moments_library implementation 74e>+≡ (91a) <84b 85b>
  subroutine read_channels (channels)
    type(channel), dimension(:), allocatable, intent(out) :: channels
    type(channel), dimension(100) :: buffer
    real(kind=default) :: w
    real(kind=default), dimension(2) :: a, b
    logical, dimension(2) :: delta
    integer :: n, status
    do n = 1, size (buffer)
      read (*, *, iostat = status) w, a(1), b(1), a(2), b(2), delta
      if (status == 0) then
        buffer(n) = channel (w, a, b, delta)
      else
        exit
      end if
    end do
    allocate (channels(n-1))
    channels = buffer(1:n-1)

```

```

        end subroutine read_channels

85a  <circe2_moments_library declarations 74d>+≡ (91a) <84c 85c>
        public :: report_results

85b  <circe2_moments_library implementation 74e>+≡ (91a) <84d 85d>
        subroutine report_results (moments, channels)
            type(moment), dimension(0:,0:,0:,0:), intent(in) :: moments
            type(channel), dimension(:), intent(in) :: channels
            integer :: nx, mx, ny, my
            real(kind=default) :: truth, estimate, sigma, pull, eps
            do nx = lbound(moments,1), ubound(moments,1)
                do mx = lbound(moments,2), ubound(moments,2)
                    do ny = lbound(moments,3), ubound(moments,3)
                        do my = lbound(moments,4), ubound(moments,4)
                            truth = beta_moments_multi ([nx, ny], [mx, my], channels)
                            estimate = mean_moment (moments(nx,mx,ny,my))
                            sigma = sqrt (variance_moment (moments(nx,mx,ny,my)))
                            pull = estimate - truth
                            eps = pull / max (epsilon (1.0_default), epsilon (1.0_double))
                            if (sigma /= 0.0_default) pull = pull / sigma
                            write (*, "( ' x^', I1, ' (1-x)^', I1, &
                                &' y^', I1, ' (1-y)^', I1, &
                                &': ', F8.5, ': est = ', F8.5, &
                                &' +/- ', F8.5,&
                                &', pull = ', F8.2,&
                                &', eps = ', F8.2)") &
                                nx, mx, ny, my, truth, estimate, sigma, pull, eps
                        end do
                    end do
                end do
            end do
        end subroutine report_results

85c  <circe2_moments_library declarations 74d>+≡ (91a) <85a 87a>
        public :: results_ok

85d  <circe2_moments_library implementation 74e>+≡ (91a) <85b 87b>
        function results_ok (moments, channels, threshold, fraction)
            ! use, intrinsic :: ieee_arithmetic
            type(moment), dimension(0:,0:,0:,0:), intent(in) :: moments
            type(channel), dimension(:), intent(in) :: channels
            real(kind=default), intent(in), optional :: threshold, fraction
            logical :: results_ok
            integer :: nx, mx, ny, my, failures
            real(kind=default) :: thr, frac, eps

```

```

real(kind=default) :: truth, estimate, sigma
! we must not expect to measure zero better than the
! double precision used in the ocaml code:
eps = 200 * max (epsilon (1.0_default), epsilon (1.0_double))
if (present(threshold)) then
    thr = threshold
else
    thr = 5
end if
if (present(fraction)) then
    frac = fraction
else
    frac = 0.01_default
end if
failures = 0
do nx = lbound(moments,1), ubound(moments,1)
    do mx = lbound(moments,2), ubound(moments,2)
        do ny = lbound(moments,3), ubound(moments,3)
            do my = lbound(moments,4), ubound(moments,4)
                truth = beta_moments_multi ([nx, ny], [mx, my], channels)
                estimate = mean_moment (moments(nx,mx,ny,my))
                sigma = sqrt (variance_moment (moments(nx,mx,ny,my)))
                if (.not. (      ieee_is_normal (truth) &
                             .and. ieee_is_normal (estimate) &
                             .and. ieee_is_normal (sigma)) &
                    .or. abs (estimate - truth) > max (thr * sigma, eps)) then
                    failures = failures + 1
                end if
            end do
        end do
    end do
end do
if (failures >= frac * size (moments)) then
    results_ok = .false.
else
    results_ok = .true.
end if
contains
<The old ieee_is_normal kludge 86>
end function results_ok

```

gfortran doesn't have the intrinsic ieee_arithmetic module yet ...

86 <The old ieee_is_normal kludge 86>≡ (85d)
function ieee_is_normal (x)

```

    real(kind=default), intent(in) :: x
    logical :: ieee_is_normal
    ieee_is_normal = .not. (x /= x)
end function ieee_is_normal

```

A.6.4 Generate Sample

```

87a <circe2_moments_library declarations 74d>+≡ (91a) <85c 87c>
    public :: generate

87b <circe2_moments_library implementation 74e>+≡ (91a) <85d 87d>
    subroutine generate (rng, nevents)
        class(rng_type), intent(inout) :: rng
        integer, intent(in) :: nevents
        type(channel), dimension(:), allocatable :: channels
        real(kind=default), dimension(2) :: x
        integer :: i
        call read_channels (channels)
        do i = 1, nevents
            call generate_beta_multi (rng, x, channels)
            write (*, "(3(5x,F19.17))") x, 1.0_default
        end do
    end subroutine generate

```

A.6.5 List Moments

```

87c <circe2_moments_library declarations 74d>+≡ (91a) <87a 88a>
    public :: compare

87d <circe2_moments_library implementation 74e>+≡ (91a) <87b 88b>
    subroutine compare (rng, nevents, file)
        class(rng_type), intent(inout) :: rng
        integer, intent(in) :: nevents
        character(len=*), intent(in) :: file
        type(channel), dimension(:), allocatable :: channels
        integer, parameter :: N = 1
        type(moment), dimension(0:N,0:N,0:N,0:N) :: moments
        real(kind=default), dimension(2) :: x
        character(len=128) :: design
        real(kind=default) :: roots
        integer :: ierror
        integer, dimension(2) :: p, h
        integer :: i
        type(circe2_state) :: c2s

```

```

call read_channels (channels)
call init_moments (moments)
design = "CIRCE2/TEST"
roots = 42
p = [11, -11]
h = 0
call circe2_load (c2s, trim(file), trim(design), roots, ierror)
do i = 1, nevents
    call circe2_generate (c2s, rng, x, p, h)
    call record_moment (moments, x(1), x(2))
end do
call report_results (moments, channels)
end subroutine compare

```

A.6.6 Check Generator

```

88a  <circe2_moments_library declarations 74d>+≡ (91a) <87c
      public :: check

88b  <circe2_moments_library implementation 74e>+≡ (91a) <87d
      subroutine check (rng, nevents, file, distributions, fail)
        class(rng_type), intent(inout) :: rng
        integer, intent(in) :: nevents
        character(len=*), intent(in) :: file
        logical, intent(in), optional :: distributions, fail
        type(channel), dimension(:), allocatable :: channels
        type(channel), dimension(1) :: unit_channel
        integer, parameter :: N = 1
        type(moment), dimension(0:N,0:N,0:N,0:N) :: moments, unit_moments
        real(kind=default), dimension(2) :: x
        character(len=128) :: design
        real(kind=default) :: roots, weight
        integer :: ierror
        integer, dimension(2) :: p, h
        integer :: i
        logical :: generation_ok, distributions_ok
        logical :: check_distributions, expect_failure
        type(circe2_state) :: c2s
        if (present (distributions)) then
            check_distributions = distributions
        else
            check_distributions = .true.
        end if
        if (present (fail)) then

```



```

        expect_failure = fail
    else
        expect_failure = .false.
    end if
    call read_channels (channels)
    call init_moments (moments)
    if (check_distributions) call init_moments (unit_moments)
    design = "CIRCE2/TEST"
    roots = 42
    p = [11, -11]
    h = 0
    call circe2_load (c2s, trim(file), trim(design), roots, ierror)
    do i = 1, nevents
        call circe2_generate (c2s, rng, x, p, h)
        call record_moment (moments, x(1), x(2))
        if (check_distributions) then
            weight = circe2_distribution (c2s, p, h, x)
            call record_moment (unit_moments, x(1), x(2), w = 1 / weight)
        end if
    end do
    generation_ok = results_ok (moments, channels)
    if (check_distributions) then
        distributions_ok = results_ok (unit_moments, unit_channel)
    else
        distributions_ok = .not. expect_failure
    end if
    if (expect_failure) then
        if (generation_ok .and. distributions_ok) then
            print *, "FAIL: unexpected success"
        else
            if (.not. generation_ok) then
                print *, "OK: expected failure in generation"
            end if
            if (.not. distributions_ok) then
                print *, "OK: expected failure in distributions"
            end if
        end if
        call report_results (moments, channels)
    else
        if (generation_ok .and. distributions_ok) then
            print *, "OK"
        else
            if (.not. generation_ok) then

```

```

        print *, "FAIL: generation"
        call report_results (moments, channels)
    end if
    if (.not. distributions_ok) then
        print *, "FAIL: distributions"
        call report_results (unit_moments, unit_channel)
    end if
end if
end if
end if
end subroutine check

```

A.7 circe2_moments: Compare Moments of distributions

```

90  <Main program 90>≡ (91b)
    program circe2_moments
        use circe2
        use circe2_moments_library !NODEP!
        use tao_random_objects !NODEP!
        implicit none
        type(rng_tao), save :: rng
        character(len=1024) :: mode, filename, buffer
        integer :: status, nevents, seed
        call get_command_argument (1, value = mode, status = status)
        if (status /= 0) mode = ""
        call get_command_argument (2, value = filename, status = status)
        if (status /= 0) filename = ""
        call get_command_argument (3, value = buffer, status = status)
        if (status == 0) then
            read (buffer, *, iostat = status) nevents
            if (status /= 0) nevents = 1000
        else
            nevents = 1000
        end if
        call get_command_argument (4, value = buffer, status = status)
        if (status == 0) then
            read (buffer, *, iostat = status) seed
            if (status == 0) then
                call random2_seed (rng, seed)
            else
                call random2_seed (rng)
            end if
        else

```

```

        call random2_seed (rng)
    end if
    select case (trim (mode))
    case ("check")
        call check (rng, nevents, trim (filename))
    case ("!check")
        call check (rng, nevents, trim (filename), fail = .true.)
    case ("check_generation")
        call check (rng, nevents, trim (filename), distributions = .false.)
    case ("!check_generation")
        call check (rng, nevents, trim (filename), fail = .true., &
                    distributions = .false.)

    case ("compare")
        call compare (rng, nevents, trim (filename))
    case ("generate")
        call generate (rng, nevents)
    case ("selftest")
        call selftest (rng, nevents)
    case default
        print *, &
            "usage: circe2_moments " // &
            "[check|check_generation|generate|selftest] " // &
            "filename [events] [seed]"
    end select
end program circe2_moments

```

91a \langle circe2_moments.f90 78a $\rangle + \equiv$ \triangleleft 78a 91b \triangleright

```

module circe2_moments_library
    use kinds
    use tao_random_objects !NODEP!
    use sampling !NODEP!
    use circe2
    implicit none
    private
     $\langle$ circe2_moments_library declarations 74d $\rangle$ 
contains
     $\langle$ circe2_moments_library implementation 74e $\rangle$ 
end module circe2_moments_library

```

91b \langle circe2_moments.f90 78a $\rangle + \equiv$ \triangleleft 91a

```

 $\langle$ Main program 90 $\rangle$ 

```

References

- [1] A. Atkinson and J. Whittaker, Appl. Stat. **28**, 90 (1979).
- [2] L. Devroye, *Non-uniform Random Variate Generation*, Springer, 1986.

B Making Grids

B.1 Interface of *Float*

```
module type T =  
  sig  
    type t  
    (* Difference between 1.0 and the minimum float greater than 1.0 *)  
    val epsilon : t  
    val to_string : t → string  
    val input_binary_float : in_channel → float  
    val input_binary_floats : in_channel → float array → unit  
  end  
  
module Double : T with type t = float
```

B.2 Implementation of *Float*

```
open Printf  
  
module type T =  
  sig  
    type t  
    (* Difference between 1.0 and the minimum float greater than 1.0 *)  
    val epsilon : t  
    val to_string : t → string  
    val input_binary_float : in_channel → float  
    val input_binary_floats : in_channel → float array → unit  
  end  
  
module Double =  
  struct  
    type t = float  
  
    Difference between 1.0 and the minimum float greater than 1.0
```



This is the hard coded value for double precision on Linux/Intel. We should determine this *machine dependent* value during configuration.

```

let epsilon = 2.2204460492503131 · 10-16
let little_endian = true

let to_string x =
  let s = Bytes.of_string (sprintf "%.17E" x) in
  for i = 0 to Bytes.length s - 1 do
    let c = Bytes.get s i in
    if c = 'e' ∨ c = 'E' then
      Bytes.set s i 'D'
  done;
  Bytes.to_string s

```

Identity floatingpoint numbers that are indistinguishable from integers for more concise printing.

```

type int_or_float =
  | Int of int
  | Float of float

let float_min_int = float min_int
let float_max_int = float max_int

let soft_truncate x =
  let eps = 2.0 * . abs_float x * . epsilon in
  if x ≥ 0.0 then begin
    if x > float_max_int then
      Float x
    else if x - . floor x ≤ eps then
      Int (int_of_float x)
    else if ceil x - . x ≤ eps then
      Int (int_of_float x + 1)
    else
      Float x
  end else begin
    if x < float_min_int then
      Float x
    else if ceil x - . x ≤ eps then
      Int (int_of_float x)
    else if x - . floor x ≤ eps then
      Int (int_of_float x - 1)
    else

```

```

      Float x
    end

let to_short_string x =
  match soft_truncate x with
  | Int i → string_of_int i ^ "D0"
  | Float x → to_string x

Suggested by Xavier Leroy:

let output_float_big_endian oc f =
  let n = ref (Int64.bits_of_float f) in
  for i = 0 to 7 do
    output_byte oc (Int64.to_int (Int64.shift_right_logical !n 56));
    n := Int64.shift_left !n 8
  done

let output_float_little_endian oc f =
  let n = ref (Int64.bits_of_float f) in
  for i = 0 to 7 do
    output_byte oc (Int64.to_int !n);
    n := Int64.shift_right_logical !n 8
  done

let input_float_big_endian ic =
  let n = ref Int64.zero in
  for i = 0 to 7 do
    let b = input_byte ic in
    n := Int64.logor (Int64.shift_left !n 8) (Int64.of_int b)
  done;
  Int64.float_of_bits !n

let input_float_little_endian ic =
  let n = ref Int64.zero in
  for i = 0 to 7 do
    let b = input_byte ic in
    n := Int64.logor !n (Int64.shift_left (Int64.of_int b) (i × 8))
  done;
  Int64.float_of_bits !n

let input_binary_float = input_float_little_endian

let input_binary_floats ic array =
  for i = 0 to Array.length array - 1 do
    array.(i) ← input_binary_float ic
  done

```

end

B.3 Interface of *ThoArray*

exception *Out_of_bounds* of *int* \times *int*

Interpret optional array boundaries. Assuming that *Array.length* $a \mapsto n$, we have

- *decode_inf* $a \mapsto 0$
- *decode_sup* $a \mapsto n - 1$
- *decode_inf* $\sim inf : i$ $a \mapsto i$ for $0 \leq i \leq n - 1$
- *decode_sup* $\sim sup : i$ $a \mapsto i$ for $0 \leq i \leq n - 1$
- *decode_inf* $\sim inf : (-i)$ $a \mapsto n - i$ for $1 \leq i \leq n$
- *decode_sup* $\sim sup : (-i)$ $a \mapsto n - i$ for $1 \leq i \leq n$
- *decode_inf* $\sim inf : i$ a raises *Out_of_bounds* for $i \geq n \vee i < -n$
- *decode_sup* $\sim sup : i$ a raises *Out_of_bounds* for $i \geq n \vee i < -n$

In particular

- *decode_inf* $\sim inf : (-2)$ $a \mapsto n - 2$, i.e. the index of the next-to-last element.
- *decode_sup* $\sim sup : (-1)$ $a \mapsto n - 1$, i.e. the index of the last element.

val *decode_inf* : ?*inf* : *int* \rightarrow α array \rightarrow *int*

val *decode_sup* : ?*sup* : *int* \rightarrow α array \rightarrow *int*

Just like the functions from *Array* of the same name, but acting only on the subarray specified by the optional $\sim inf$ and $\sim sup$, interpreted as above.

E.g. *copy* $\sim inf : 1 \sim sup : (-2)$ a chops off the first and last elements.

val *map* : ?*inf* : *int* \rightarrow ?*sup* : *int* \rightarrow ($\alpha \rightarrow \beta$) \rightarrow α array \rightarrow β array

val *copy* : ?*inf* : *int* \rightarrow ?*sup* : *int* \rightarrow α array \rightarrow α array

val *iter* : ?*inf* : *int* \rightarrow ?*sup* : *int* \rightarrow ($\alpha \rightarrow unit$) \rightarrow α array \rightarrow *unit*

val *fold_left* : ?*inf* : *int* \rightarrow ?*sup* : *int* \rightarrow
($\alpha \rightarrow \beta \rightarrow \alpha$) \rightarrow $\alpha \rightarrow \beta$ array \rightarrow α

A convenience function.

val *sum_float* : ?*inf* : *int* \rightarrow ?*sup* : *int* \rightarrow *float* array \rightarrow *float*

val *suite* : *OUnit.test*

B.4 Implementation of *ThoArray*

exception *Out_of_bounds* of $int \times int$

```
let decode_limit i a =  
  let n = Array.length a in  
  if i ≥ n then  
    raise (Out_of_bounds (i, n))  
  else if i ≥ 0 then  
    i  
  else if i ≥ -n then  
    n + i  
  else  
    raise (Out_of_bounds (i, n))  
  
let decode_inf ?inf a =  
  match inf with  
  | None → 0  
  | Some i → decode_limit i a  
  
let decode_sup ?sup a =  
  match sup with  
  | None → Array.length a - 1  
  | Some i → decode_limit i a  
  
let decode_limit_suite =  
  let ten = Array.init 10 (fun i → i) in  
  let open OUnit in  
  "decode_limit" >:::  
  ["0" >:: (fun () → assert_equal 0 (decode_limit 0 ten));  
   "9" >:: (fun () → assert_equal 9 (decode_limit 9 ten));  
   "10" >::  
   (fun () →  
     assert_raises (Out_of_bounds (10, 10))  
       (fun () → decode_limit 10 ten));  
   "-1" >:: (fun () → assert_equal 9 (decode_limit (-1) ten));  
   "-10" >:: (fun () → assert_equal 0 (decode_limit (-10) ten));  
   "-11" >::  
   (fun () →  
     assert_raises (Out_of_bounds (-11, 10))  
       (fun () → decode_limit (-11) ten))]
```



```

let map ?inf ?sup f a =
  let n = decode_inf ?inf a in
  Array.init (decode_sup ?sup a - n + 1) (fun i → f a.(n + i))

let copy ?inf ?sup a =
  map ?inf ?sup (fun x → x) a

let map_suite =
  let five = Array.init 5 succ in
  let twice n = 2 × n in
  let open OUnit in
  "map" >:::
  ["2_*_1" >:: (fun () →
    assert_equal [[2; 4; 6; 8; 10]] (map twice five));
  "2_*_1" >:: (fun () →
    assert_equal [[4; 6; 8; 10]] (map twice ~inf : 1 five));
  "2_*_1" >:: (fun () →
    assert_equal [[2; 4; 6; 8]] (map twice ~sup : (-2) five));
  "2_*_1" >:: (fun () →
    assert_equal [[4; 6; 8]] (map twice ~inf : 1 ~sup : (-2) five));
  "2_*_1" >:: (fun () →
    assert_equal [[4; 6]] (map twice ~inf : 1 ~sup : 2 five))]

let copy_suite =
  let five = Array.init 5 succ in
  let open OUnit in
  "copy" >:::
  [". ." >:: (fun () → assert_equal five (copy five));
  "1.." >:: (fun () → assert_equal [[2; 3; 4; 5]] (copy ~inf : 1 five));
  "1..-2" >:: (fun () → assert_equal [[1; 2; 3; 4]] (copy ~sup : (-2) five));
  "1..-2" >:: (fun () → assert_equal [[2; 3; 4]] (copy ~inf : 1 ~sup :
  (-2) five));
  "1..2" >:: (fun () → assert_equal [[2; 3]] (copy ~inf : 1 ~sup : 2 five))]

let fold_left ?inf ?sup f x a =
  let acc = ref x in
  try
    for i = decode_inf ?inf a to decode_sup ?sup a do
      acc := f !acc a.(i)
    done;
    !acc
  with
  | Out_of_bounds (_, _) → x

```

```

let iter ?inf ?sup f a =
  fold_left ?inf ?sup (fun () x → f x) () a
let iter ?inf ?sup f a =
  try
    for i = decode_inf ?inf a to decode_sup ?sup a do
      f a.(i)
    done
  with
  | Out_of_bounds (_, _) → ()
let sum_float ?inf ?sup a =
  fold_left ?inf ?sup (+.) 0.0 a
let sum_float_suite =
  let ten = Array.init 10 (fun i → float i +. 1.0) in
  let open OUnit in
  "sum_float" >:::
  [". ." >:: (fun () → assert_equal 55.0 (sum_float ten));
   "1.." >:: (fun () → assert_equal 54.0 (sum_float ~inf : 1 ten));
   "..-2" >:: (fun () → assert_equal 45.0 (sum_float ~sup : (-2) ten));
   "1..-2" >:: (fun () → assert_equal 44.0 (sum_float ~inf : 1 ~sup :
(-2) ten));
   "1..2" >:: (fun () → assert_equal 5.0 (sum_float ~inf : 1 ~sup : 2 ten))]
let suite =
  let open OUnit in
  "Array" >:::
  [decode_limit_suite;
   map_suite;
   copy_suite;
   sum_float_suite]

```

B.5 Interface of *ThoMatrix*

```

val copy : ?inf1:int → ?sup1:int → ?inf2:int → ?sup2:int →
  α array array → α array array
val map : ?inf1:int → ?sup1:int → ?inf2:int → ?sup2:int →
  (α → β) → α array array → β array array
val iter : ?inf1:int → ?sup1:int → ?inf2:int → ?sup2:int →
  (α → unit) → α array array → unit
val fold_left : ?inf1:int → ?sup1:int → ?inf2:int → ?sup2:int →
  (α → β → α) → α → β array array → α

```

```

val sum_float : ?inf1:int → ?sup1:int → ?inf2:int → ?sup2:int →
  float array array → float
val size :  $\alpha$  array array → int
val transpose :  $\alpha$  array array →  $\alpha$  array array
val suite : OUnit.test

```

B.6 Implementation of *ThoMatrix*

```

let map ?inf1 ?sup1 ?inf2 ?sup2 f a =
  ThoArray.map ?inf : inf1 ?sup : sup1
    (ThoArray.map ?inf : inf2 ?sup : sup2 f) a
let copy ?inf1 ?sup1 ?inf2 ?sup2 a =
  map ?inf1 ?sup1 ?inf2 ?sup2 (fun x → x) a
let iter ?inf1 ?sup1 ?inf2 ?sup2 f a =
  ThoArray.iter ?inf : inf1 ?sup : sup1
    (ThoArray.iter ?inf : inf2 ?sup : sup2 f) a
let fold_left ?inf1 ?sup1 ?inf2 ?sup2 f x a =
  ThoArray.fold_left ?inf : inf1 ?sup : sup1
    (ThoArray.fold_left ?inf : inf2 ?sup : sup2 f) x a
let sum_float ?inf1 ?sup1 ?inf2 ?sup2 a =
  fold_left ?inf1 ?sup1 ?inf2 ?sup2 (+.) 0.0 a
let size a =
  Array.fold_left (fun acc v → Array.length v + acc) 0 a
let transpose a =
  let n1 = Array.length a
  and n2 = Array.length a.(0) in
  let a' = Array.make_matrix n2 n1 a.(0).(0) in
  for i1 = 0 to pred n1 do
    for i2 = 0 to pred n2 do
      a'.(i2).(i1) ← a.(i1).(i2)
    done
  done;
  a'
let suite =
  let open OUnit in
  "Matrix" >:::
  []

```

B.7 Interface of *Filter*

```
type t
val unit : t
val gaussian : float → t
val apply : ?inf:int → ?sup:int → t → float array → float array
val apply1 : ?inf1:int → ?sup1:int → ?inf2:int → ?sup2:int →
  t → float array array → float array array
val apply2 : ?inf1:int → ?sup1:int → ?inf2:int → ?sup2:int →
  t → float array array → float array array
val apply12 : ?inf1:int → ?sup1:int → ?inf2:int → ?sup2:int →
  t → t → float array array → float array array
exception Out_of_bounds of int × int
val suite : OUnit.test
```

B.8 Implementation of *Filter*

```
exception Out_of_bounds of int × int
```

We will assume $left.(0) = center = right.(0)$ and use only *center*.

```
type t' =
  { left' : float array;
    center' : float;
    right' : float array }

type t =
  { left : float array;
    center : float;
    right : float array;
    norm : float array array }

let unit =
  { left = [| 1.0 |];
    center = 1.0;
    right = [| 1.0 |];
    norm = [| [| 1.0 |] |] }
```

```

let normalize f =
  let left_sum = ThoArray.sum_float ~inf : 1 f.left'
  and right_sum = ThoArray.sum_float ~inf : 1 f.right' in
  let norm = f.center' + . left_sum + . right_sum in
  let left = Array.map (fun x → x /. norm) f.left'
  and center = f.center' /. norm
  and right = Array.map (fun x → x /. norm) f.right' in
  let norm =
    Array.make_matrix (Array.length left) (Array.length right) center in
  for i = 1 to Array.length left - 1 do
    norm.(i).(0) ← norm.(pred i).(0) + . left.(i)
  done;
  for i = 0 to Array.length left - 1 do
    for j = 1 to Array.length right - 1 do
      norm.(i).(j) ← norm.(i).(pred j) + . right.(j)
    done
  done;
  { left; center; right; norm }

let upper x =
  truncate (ceil x)

let gaussian width =
  let n = upper (width * . sqrt (2. * . log 106)) in
  let weights =
    Array.init (succ n) (fun i → exp (−. 0.5 * . (float i /. width) ** 2.)) in
  normalize
    { left' = weights;
      center' = 1.0;
      right' = weights }

```

Idea: avoid bleeding into empty regions by treating their edges like boundaries.

```

let apply ?inf ?sup f a =
  let inf = ThoArray.decode_inf ?inf a
  and sup = ThoArray.decode_sup ?sup a in
  let n_left = Array.length f.left
  and n_right = Array.length f.right
  and a' = Array.copy a in
  for i = inf to sup do
    let num_left = min (pred n_left) (i - inf)
    and num_right = min (pred n_right) (sup - i) in

```

```

    let sum = ref (f.center * . a.(i)) in
    for j = 1 to num_left do
        sum := !sum + . f.left.(j) * . a.(i - j)
    done;
    for j = 1 to num_right do
        sum := !sum + . f.right.(j) * . a.(i + j)
    done;
    a'.(i) ← !sum /. f.norm.(num_left).( num_right)
done;
a'

module Real =
struct
    type t = float
    let compare = compare
    let compare x y =
        if abs_float (x - . y) ≤
            Float.Double.epsilon * . (max (abs_float x) (abs_float y)) then
            0
        else if x < y then
            -1
        else
            1
    let pp_printer = Format.pp_print_float
    let pp_print_sep = OUnitDiff.pp_comma_separator
end

module Reals = OUnitDiff.ListSimpleMake (Real)

let array_assert_equal a1 a2 =
    Reals.assert_equal (Array.to_list a1) (Array.to_list a2)

let limits_suite =
    let fence = Array.init 10 (fun i → if i = 0 ∨ i = 9 then 1.0 else 0.0) in
    let open OUnit in
    "limits" >::
    ["1..-2" >::
        (fun () →
            array_assert_equal fence
            (apply ~inf : 1 ~sup : (-2) (gaussian 10.0) fence))]

let norm_suite =
    let flat = Array.make 10 1.0 in
    let open OUnit in

```

```

"norm" >::
["gaussian_1" >::
  (fun () →
    array_assert_equal flat (apply (gaussian 1.0) flat));
"gaussian_5" >::
  (fun () →
    array_assert_equal flat (apply (gaussian 5.0) flat));
"gaussian_10" >::
  (fun () →
    array_assert_equal flat (apply (gaussian 10.0) flat))]

let apply_suite =
  let open OUnit in
  "apply" >::
  [limits_suite;
   norm_suite]

let array_map ?inf ?sup f a =
  let a' = Array.copy a in
  for i = ThoArray.decode_inf ?inf a to ThoArray.decode_sup ?sup a do
    a'.(i) ← f a.(i)
  done;
  a'

let array_map_suite =
  let five = Array.init 5 (fun i → float (succ i)) in
  let open OUnit in
  "array_map" >::
  [". -2" >::
    (fun () →
      array_assert_equal [| 2.0; 4.0; 6.0; 8.0; 5.0 |]
        (array_map ~sup : (-2) (fun x → 2.0 *. x) five));
    "2. ." >::
    (fun () →
      array_assert_equal [| 1.0; 2.0; 6.0; 8.0; 10.0 |]
        (array_map ~inf : 2 (fun x → 2.0 *. x) five));
    "1. -2" >::
    (fun () →
      array_assert_equal [| 1.0; 4.0; 6.0; 8.0; 5.0 |]
        (array_map ~inf : 1 ~sup : (-2) (fun x → 2.0 *. x) five))]

let apply1 ?inf1 ?sup1 ?inf2 ?sup2 f a =
  ThoMatrix.transpose

```

```

      (array_map ?inf : inf2 ?sup : sup2
        (apply ?inf : inf1 ?sup : sup1 f)
        (ThoMatrix.transpose a))
let apply2 ?inf1 ?sup1 ?inf2 ?sup2 f a =
  array_map ?inf : inf1 ?sup : sup1
    (apply ?inf : inf2 ?sup : sup2 f) a
let apply12 ?inf1 ?sup1 ?inf2 ?sup2 f1 f2 a =
  array_map ?inf : inf1 ?sup : sup1
    (apply ?inf : inf2 ?sup : sup2 f2)
    (ThoMatrix.transpose
      (array_map ?inf : inf2 ?sup : sup2
        (apply ?inf : inf1 ?sup : sup1 f1)
        (ThoMatrix.transpose a))))
let apply12_suite =
  let open OUnit in
  "apply12" >:::
  []
let suite =
  let open OUnit in
  "Filter" >:::
  [apply_suite;
   array_map_suite;
   apply12_suite]

```

B.9 Interface of *Diffmap*

```

module type T =
  sig
    type t
    An invertible differentiable map is characterized by its domain  $[x_{\min}, x_{\max}]$ 
    type domain
    val x_min : t → domain
    val x_max : t → domain
    and codomain  $[y_{\min}, y_{\max}]$ 
    type codomain
    val y_min : t → codomain
    val y_max : t → codomain
  end

```


the map proper

$$\begin{aligned}\phi : [x_{\min}, x_{\max}] &\rightarrow [y_{\min}, y_{\max}] \\ x &\mapsto y = \phi(x)\end{aligned}\tag{76}$$

`val phi : t → domain → codomain`

the inverse map

$$\begin{aligned}\phi^{-1} : [y_{\min}, y_{\max}] &\rightarrow [x_{\min}, x_{\max}] \\ y &\mapsto x = \phi^{-1}(y)\end{aligned}\tag{77}$$

`val ihp : t → codomain → domain`

the jacobian of the map

$$\begin{aligned}J : [x_{\min}, x_{\max}] &\rightarrow \mathbf{R} \\ x &\mapsto J(x) = \frac{d\phi}{dx}(x)\end{aligned}\tag{78}$$

`val jac : t → domain → float`

and finally the jacobian of the inverse map

$$\begin{aligned}J^* : [y_{\min}, y_{\max}] &\rightarrow \mathbf{R} \\ y &\mapsto J^*(y) = \frac{d\phi^{-1}}{dy}(y) = \left(\frac{d\phi}{dx}(\phi^{-1}(y)) \right)^{-1}\end{aligned}\tag{79}$$

`val caj : t → codomain → float`

`val is_null : t → bool`

`with_domain map x_min x_max` takes the map `map` and returns the ‘same’ map with the new domain $[x_{\min}, x_{\max}]$

`val with_domain : t → x_min : domain → x_max : domain → t`

There is also a convention for encoding the map so that it can be read by `circe2`:

`val encode : t → string`

`end`

For the application in `circe2`, it suffices to consider real maps. Introducing `domain` and `codomain` does not make any difference for the typechecker as long as we only use `Diffmap.Real`, but it provides documentation and keeps the door for extensions open.

`module type Real = T with type domain = float and type codomain = float`

B.10 Testing Real Maps

```

module type Test =
  sig
    module M : Real
    val domain : M.t → unit
    val inverse : M.t → unit
    val jacobian : M.t → unit
    val all : M.t → unit
  end
module Make_Test (M : Real) : Test with module M = M

```

B.11 Specific Real Maps

```

module Id :
  sig
    include Real

    create x_min x_max y_min y_max creates an identity map  $[x_{\min}, x_{\max}] \rightarrow [y_{\min}, y_{\max}]$ .

```

$$\begin{aligned} \iota : [x_{\min}, x_{\max}] &\rightarrow [x_{\min}, x_{\max}] \\ x &\mapsto \iota(x) = x \end{aligned} \tag{80}$$

Default values for *x_min* and *x_max* are *y_min* and *y_max*, respectively. Indeed, they are the only possible values and other values raise an exception.

```

    val create :
      ?x_min : domain → ?x_max : domain → codomain →
      codomain → t
    end

module Null :
  sig
    include Real
    val create :
      ?x_min : domain → ?x_max : domain → codomain →
      codomain → t
    end

module Linear :
  sig
    include Real

```

create x_min x_max y_min y_max creates a linear map $[x_{\min}, x_{\max}] \rightarrow [y_{\min}, y_{\max}]$. The parameters a and b are determined from domain and codomain.

$$\begin{aligned} \lambda_{a,b} : [x_{\min}, x_{\max}] &\rightarrow [y_{\min}, y_{\max}] \\ x &\mapsto \lambda_{a,b}(x) = ax + b \end{aligned} \quad (81)$$

Default values for x_min and x_max are y_min and y_max , respectively.

```
val create :
  ?x_min : domain → ?x_max : domain → codomain →
  codomain → t
end
```

module *Power* :

```
sig
  include Real
```

create $alpha$ eta x_min x_max y_min y_max creates a power map $[x_{\min}, x_{\max}] \rightarrow [y_{\min}, y_{\max}]$. The parameters ξ , a and b are determined from α , η , domain and codomain.

$$\begin{aligned} \psi_{a,b}^{\alpha,\xi,\eta} : [x_{\min}, x_{\max}] &\rightarrow [y_{\min}, y_{\max}] \\ x &\mapsto \psi_{a,b}^{\alpha,\xi,\eta}(x) = \frac{1}{b}(a(x - \xi))^\alpha + \eta \end{aligned} \quad (82)$$

Default values for x_min and x_max are y_min and y_max , respectively.

```
val create : alpha : float → eta : float →
  ?x_min : domain → ?x_max : domain → codomain →
  codomain → t
end
```

module *Resonance* :

```
sig
  include Real
```

create eta a x_min x_max y_min y_max creates a resonance map $[x_{\min}, x_{\max}] \rightarrow [y_{\min}, y_{\max}]$.

$$\begin{aligned} \rho_{a,b}^{\xi,\eta} : [x_{\min}, x_{\max}] &\rightarrow [y_{\min}, y_{\max}] \\ x &\mapsto \rho_{a,b}^{\xi,\eta}(x) = a \tan \left(\frac{a}{b^2}(x - \xi) \right) + \eta \end{aligned} \quad (83)$$

The parameters ξ and b are determined from η , a , domain and codomain. Default values for x_min and x_max are y_min and y_max , respectively.

```
val create : eta : float → a : float →
  ?x_min : domain → ?x_max : domain → codomain →
  codomain → t
end
```

B.12 Implementation of *Diffmap*

```
open Printf

module type T =
  sig
    type t

    type domain
    val x_min : t → domain
    val x_max : t → domain

    type codomain
    val y_min : t → codomain
    val y_max : t → codomain

    val phi : t → domain → codomain
    val ihp : t → codomain → domain
    val jac : t → domain → float
    val caj : t → codomain → float

    val is_null : t → bool

    val with_domain : t → x_min : domain → x_max : domain → t

    val encode : t → string
  end

module type Real = T with type domain = float and type codomain = float
```

B.13 Testing Real Maps

```
module type Test =
  sig
    module M : Real
    val domain : M.t → unit
    val inverse : M.t → unit
    val jacobian : M.t → unit
    val all : M.t → unit
  end

module Make_Test (M : Real) =
  struct
```

```

module M = M

let steps = 1000
let epsilon = 1.0 · 10-6

let diff ?(tolerance = 1.0 · 10-13) x1 x2 =
  let d = (x1 -. x2) in
  if abs_float d < (abs_float x1 +. abs_float x2) *. tolerance then
    0.0
  else
    d

let derive x_min x_max f x =
  let xp = min x_max (x +. epsilon)
  and xm = max x_min (x -. epsilon) in
  (f xp -. f xm) /. (xp -. xm)

let domain m =
  let x_min = M.x_min m
  and x_max = M.x_max m
  and y_min = M.y_min m
  and y_max = M.y_max m in
  let x_min' = M.ihp m y_min
  and x_max' = M.ihp m y_max
  and y_min' = M.phi m x_min
  and y_max' = M.phi m x_max in
  printf "%%f:%%[%%g,%%g]%%->%%[%%g,%%g]%%(%%g,%%g)\\n"
    x_min x_max y_min' y_max' (diff y_min' y_min) (diff y_max' y_max);
  printf "f^-1:%%[%%g,%%g]%%->%%[%%g,%%g]%%(%%g,%%g)\\n"
    y_min y_max x_min' x_max' (diff x_min' x_min) (diff x_max' x_max)

let inverse m =
  let x_min = M.x_min m
  and x_max = M.x_max m
  and y_min = M.y_min m
  and y_max = M.y_max m in
  for i = 1 to steps do
    let x = x_min +. Random.float (x_max -. x_min)
    and y = y_min +. Random.float (y_max -. y_min) in
    let x' = M.ihp m y
    and y' = M.phi m x in
    let x'' = M.ihp m y'
    and y'' = M.phi m x' in
    let dx = diff x'' x

```

```

    and dy = diff y'' y in
    if dx ≠ 0.0 then
        printf "f~-1 of %g->%g->%g(%g)\n" x y' x'' dx;
    if dy ≠ 0.0 then
        printf "%g of f~-1: %g->%g->%g(%g)\n" y x' y'' dy
    done

let jacobian m =
    let x_min = M.x_min m
    and x_max = M.x_max m
    and y_min = M.y_min m
    and y_max = M.y_max m in
    for i = 1 to steps do
        let x = x_min + . Random.float (x_max - . x_min)
        and y = y_min + . Random.float (y_max - . y_min) in
        let jac_x' = derive x_min x_max (M.phi m) x
        and jac_x = M.jac m x
        and inv_jac_y' = derive y_min y_max (M.ihp m) y
        and inv_jac_y = M.caj m y in
        let dj = diff ~tolerance : 1.0 · 10-9 jac_x' jac_x
        and dij = diff ~tolerance : 1.0 · 10-9 inv_jac_y' inv_jac_y in
        if dj ≠ 0.0 then
            printf "dy/dx: %g->%g(%g)\n" x jac_x' dj;
        if dij ≠ 0.0 then
            printf "dx/dy: %g->%g(%g)\n" y inv_jac_y' dij
    done

let all m =
    printf "phi(domain)=codomain and phi(codomain)=domain";
    domain m;
    printf "ihp of phi=id(domain) and phi of ihp=id(codomain)";
    inverse m;
    printf "jacobian";
    jacobian m

end

```

B.14 Specific Real Maps

```

module Id =
    struct

```

```

type domain = float
type codomain = float

type t =
  { x_min : domain;
    x_max : domain;
    y_min : codomain;
    y_max : codomain;
    phi : float → float;
    ihp : float → float;
    jac : float → float;
    caj : float → float }

let encode m = "0_1_0_0_1_1"

let closure ~x_min ~x_max ~y_min ~y_max =
  let phi x = x
  and ihp y = y
  and jac x = 1.0
  and caj y = 1.0 in
  { x_min = x_min;
    x_max = x_max;
    y_min = y_min;
    y_max = y_max;
    phi = phi;
    ihp = ihp;
    jac = jac;
    caj = caj }

let idmap ~x_min ~x_max ~y_min ~y_max =
  if x_min ≠ y_min ∧ x_max ≠ y_max then
    invalid_arg "Diffmap.Id.idmap"
  else
    closure ~x_min ~x_max ~y_min ~y_max

let with_domain m ~x_min ~x_max =
  idmap ~x_min ~x_max ~y_min : m.y_min ~y_max : m.y_max

let create ?x_min ?x_max y_min y_max =
  idmap
    ~x_min : (match x_min with Some x → x | None → y_min)
    ~x_max : (match x_max with Some x → x | None → y_max)
    ~y_min ~y_max

```

```

let x_min m = m.x_min
let x_max m = m.x_max
let y_min m = m.y_min
let y_max m = m.y_max

let phi m = m.phi
let ihp m = m.ihp
let jac m = m.jac
let caj m = m.caj

let is_null m = false
end

module Null =
  struct
    include Id
    let is_null m = true
  end

module Linear =
  struct

    type domain = float
    type codomain = float

    type t =
      { x_min : domain;
        x_max : domain;
        y_min : codomain;
        y_max : codomain;
        a : float;
        b : float;
        phi : domain → codomain;
        ihp : codomain → domain;
        jac : domain → float;
        caj : codomain → float }

    let encode m = failwith "Diffmap.Linear: not used in Circe2"
    let closure ~x_min ~x_max ~y_min ~y_max ~a ~b =

```

$$x \mapsto \lambda_{a,b}(x) = ax + b \quad (84)$$

```

let phi x = a * . x + . b

```


$$y \mapsto (\lambda_{a,b})^{-1}(y) = \frac{y - b}{a} \quad (85)$$

```

and ihp y = (y - . b) /. a
and jac x = a
and caj y = 1.0 /. a in
{ x_min = x_min;
  x_max = x_max;
  y_min = y_min;
  y_max = y_max;
  a = a;
  b = b;
  phi = phi;
  ihp = ihp;
  jac = jac;
  caj = caj }

let linearmap ~x_min ~x_max ~y_min ~y_max =
  let delta_x = x_max - . x_min
  and delta_y = y_max - . y_min in
  let a = delta_y /. delta_x
  and b = (y_min * . x_max - . y_max * . x_min) /. delta_x in
  closure ~x_min ~x_max ~y_min ~y_max ~a ~b

let with_domain m ~x_min ~x_max =
  linearmap ~x_min ~x_max ~y_min : m.y_min ~y_max : m.y_max

let create ?x_min ?x_max y_min y_max =
  linearmap
    ~x_min : (match x_min with Some x → x | None → y_min)
    ~x_max : (match x_max with Some x → x | None → y_max)
    ~y_min ~y_max

let x_min m = m.x_min
let x_max m = m.x_max
let y_min m = m.y_min
let y_max m = m.y_max

let phi m = m.phi
let ihp m = m.ihp
let jac m = m.jac
let caj m = m.caj

```

```

    let is_null m = false
end
module Power =
  struct
    type domain = float
    type codomain = float
    type t =
      { x_min : domain;
        x_max : domain;
        y_min : codomain;
        y_max : codomain;
        alpha : float;
        xi : float;
        eta : float;
        a : float;
        b : float;
        phi : domain → codomain;
        ihp : codomain → domain;
        jac : domain → float;
        caj : codomain → float }
    let encode m =
      sprintf "1_□%s_□%s_□%s_□%s_□%s"
        (Float.Double.to_string m.alpha)
        (Float.Double.to_string m.xi)
        (Float.Double.to_string m.eta)
        (Float.Double.to_string m.a)
        (Float.Double.to_string m.b)
    let closure ~x_min ~x_max ~y_min ~y_max ~alpha ~xi ~eta ~a ~b =

```

$$x \mapsto \psi_{a,b}^{\alpha,\xi,\eta}(x) = \frac{1}{b}(a(x - \xi))^\alpha + \eta \quad (86)$$

```

    let phi x =
      (a * . (x - . xi)) ** alpha /. b + . eta

```

$$y \mapsto (\psi_{a,b}^{\alpha,\xi,\eta})^{-1}(y) = \frac{1}{a}(b(y - \eta))^{1/\alpha} + \xi \quad (87)$$

```

    and ihp y =
      (b * . (y - . eta)) ** (1.0 /. alpha) /. a + . xi

```

$$\frac{dy}{dx}(x) = \frac{a\alpha}{b}(a(x - \xi))^{\alpha-1} \quad (88)$$

and *jac x* =

$$a * . \alpha * . (a * . (x - . xi)) ** (\alpha - . 1.0) /. b$$

$$\frac{dx}{dy}(y) = \frac{b}{a\alpha}(b(y - \eta))^{1/\alpha-1} \quad (89)$$

and *caj y* =

$$\begin{aligned} & b * . (b * . (y - . eta)) ** (1.0 /. \alpha - . 1.0) /. (a * . \alpha) \text{ in} \\ & \{ x_min = x_min; \\ & \quad x_max = x_max; \\ & \quad y_min = y_min; \\ & \quad y_max = y_max; \\ & \quad \alpha = \alpha; \\ & \quad xi = xi; \\ & \quad eta = eta; \\ & \quad a = a; \\ & \quad b = b; \\ & \quad phi = phi; \\ & \quad ihp = ihp; \\ & \quad jac = jac; \\ & \quad caj = caj \} \end{aligned}$$

$$a_i = \frac{(b_i(y_i - \eta_i))^{1/\alpha_i} - (b_i(y_{i-1} - \eta_i))^{1/\alpha_i}}{x_i - x_{i-1}} \quad (90a)$$

$$\xi_i = \frac{x_{i-1}|y_i - \eta_i|^{1/\alpha_i} - x_i|y_{i-1} - \eta_i|^{1/\alpha_i}}{|y_i - \eta_i|^{1/\alpha_i} - |y_{i-1} - \eta_i|^{1/\alpha_i}} \quad (90b)$$

The degeneracy (39) can finally be resolved by demanding $|b| = 1$ in (48a).

```
let powermap ~x_min ~x_max ~y_min ~y_max ~alpha ~eta =
  let b =
    if eta ≤ y_min then
      1.
    else if eta ≥ y_max then
      -1.
    else
      invalid_arg "singular" in
```

```

    let pow y = (b *. (y -. eta)) ** (1. /. alpha) in
    let delta_pow = pow y_max -. pow y_min
    and delta_x = x_max -. x_min in
    let a = delta_pow /. delta_x
    and xi = (x_min *. pow y_max -. x_max *. pow y_min) /. delta_pow in
    closure ~x_min ~x_max ~y_min ~y_max ~alpha ~xi ~eta ~a ~b

let with_domain m ~x_min ~x_max =
  powermap ~x_min ~x_max ~y_min : m.y_min ~y_max : m.y_max
    ~alpha : m.alpha ~eta : m.eta

let create ~alpha ~eta ?x_min ?x_max y_min y_max =
  powermap
    ~x_min : (match x_min with Some x → x | None → y_min)
    ~x_max : (match x_max with Some x → x | None → y_max)
    ~y_min ~y_max ~alpha ~eta

let x_min m = m.x_min
let x_max m = m.x_max
let y_min m = m.y_min
let y_max m = m.y_max

let phi m = m.phi
let ihp m = m.ihp
let jac m = m.jac
let caj m = m.caj

let is_null m = false

end

module Resonance =
  struct

    type domain = float
    type codomain = float

    type t =
      { x_min : domain;
        x_max : domain;
        y_min : codomain;
        y_max : codomain;
        xi : float;
        eta : float;
        a : float;
        b : float;

```

```

    phi : domain → codomain;
    ihp : codomain → domain;
    jac : domain → float;
    caj : codomain → float }

let encode m =
  sprintf "2_0_%s_%s_%s_%s"
    (Float.Double.to_string m.xi)
    (Float.Double.to_string m.eta)
    (Float.Double.to_string m.a)
    (Float.Double.to_string m.b)

let closure ~x_min ~x_max ~y_min ~y_max ~xi ~eta ~a ~b =

```

$$x \mapsto \rho_{a,b}^{\xi,\eta}(x) = a \tan \left(\frac{a}{b^2} (x - \xi) \right) + \eta \quad (91)$$

```

let phi x = a *. tan (a *. (x -. xi) /. (b *. b)) +. eta

```

$$y \mapsto (\rho_{a,b}^{\xi,\eta})^{-1}(y) = \frac{b^2}{a} \operatorname{atan} \left(\frac{y - \eta}{a} \right) + \xi \quad (92)$$

```

and ihp y = b *. b *. (atan2 (y -. eta) a) /. a +. xi

```

$$\frac{dy}{dx}(x(y)) = \frac{1}{\frac{dx}{dy}(y)} = \left(\frac{b^2}{(y - \eta)^2 + a^2} \right)^{-1} \quad (93)$$

```

and caj y = b *. b /. ((y -. eta) ** 2.0 +. a *. a) in

```

```

let jac x = 1.0 /. caj (phi x) in

```

```

{ x_min = x_min;
  x_max = x_max;
  y_min = y_min;
  y_max = y_max;
  xi = xi;
  eta = eta;
  a = a;
  b = b;
  phi = phi;
  ihp = ihp;
  jac = jac;
  caj = caj }

```

$$b_i = \sqrt{a_i \frac{x_i - x_{i-1}}{\operatorname{atan}\left(\frac{y_i - \eta_i}{a_i}\right) - \operatorname{atan}\left(\frac{y_{i-1} - \eta_i}{a_i}\right)}} \quad (94a)$$

$$\xi_i = \frac{x_{i-1} \operatorname{atan}\left(\frac{y_i - \eta_i}{a_i}\right) - x_i \operatorname{atan}\left(\frac{y_{i-1} - \eta_i}{a_i}\right)}{x_i - x_{i-1}} \quad (94b)$$

```

let resonancemap ~x_min ~x_max ~y_min ~y_max ~eta ~a =
  let arc y = atan2 (y - . eta) a in
  let delta_arc = arc y_max - . arc y_min
  and delta_x = x_max - . x_min in
  let b = sqrt (a * . delta_x /. delta_arc)
  and xi = (x_min *. arc y_max - . x_max *. arc y_min) /. delta_arc in
  closure ~x_min ~x_max ~y_min ~y_max ~xi ~eta ~a ~b

let with_domain m ~x_min ~x_max =
  resonancemap ~x_min ~x_max ~y_min : m.y_min ~y_max : m.y_max
    ~eta : m.eta ~a : m.a

let create ~eta ~a ?x_min ?x_max y_min y_max =
  resonancemap
    ~x_min : (match x_min with Some x → x | None → y_min)
    ~x_max : (match x_max with Some x → x | None → y_max)
    ~y_min ~y_max ~eta ~a

let x_min m = m.x_min
let x_max m = m.x_max
let y_min m = m.y_min
let y_max m = m.y_max

let phi m = m.phi
let ihp m = m.ihp
let jac m = m.jac
let caj m = m.caj

let is_null m = false
end

```

B.15 Interface of *Diffmaps*

B.16 Combined Differentiable Maps

```
module type T =
  sig
    include Diffmap.T
    val id : ?x_min : domain → ?x_max : domain → codomain →
codomain → t
    val null : ?x_min : domain → ?x_max : domain → codomain →
codomain → t
  end

module type Real = T with type domain = float and type codomain = float

module type Default =
  sig
    include Real

    val power : alpha : float → eta : float →
      ?x_min : domain → ?x_max : domain → codomain → codomain →
t
    val resonance : eta : float → a : float →
      ?x_min : domain → ?x_max : domain → codomain → codomain →
t
  end

module Default : Default
```

B.17 Implementation of *Diffmaps*

```
module type T =
  sig
    include Diffmap.T
    val id : ?x_min : domain → ?x_max : domain → codomain →
codomain → t
    val null : ?x_min : domain → ?x_max : domain → codomain →
codomain → t
  end

module type Real = T with type domain = float and type codomain = float

module type Default =
  sig
```

```

include Real

val power : alpha : float → eta : float →
  ?x_min : domain → ?x_max : domain → codomain → codomain →
t
  val resonance : eta : float → a : float →
    ?x_min : domain → ?x_max : domain → codomain → codomain →
t
end

module Default =
struct
  type domain = float
  type codomain = float
  type t =
    { encode : string;
      with_domain : x_min : domain → x_max : domain → t;
      x_min : domain;
      x_max : domain;
      y_min : codomain;
      y_max : codomain;
      phi : domain → codomain;
      ihp : codomain → domain;
      jac : domain → float;
      caj : codomain → float;
      is_null : bool }

  let encode m = m.encode
  let with_domain m = m.with_domain

  let x_min m = m.x_min
  let x_max m = m.x_max
  let y_min m = m.y_min
  let y_max m = m.y_max

  let phi m = m.phi
  let ihp m = m.ihp
  let jac m = m.jac
  let caj m = m.caj
  let is_null m = m.is_null

```



Functors or first class modules should streamline this.


```

let rec id ?x_min ?x_max y_min y_max =
  let m = Diffmap.Id.create ?x_min ?x_max y_min y_max in
  let with_domain ~x_min ~x_max =
    id ~x_min ~x_max y_min y_max in
  { encode = Diffmap.Id.encode m;
    with_domain = with_domain;
    x_min = Diffmap.Id.x_min m;
    x_max = Diffmap.Id.x_max m;
    y_min = Diffmap.Id.y_min m;
    y_max = Diffmap.Id.y_max m;
    phi = Diffmap.Id.phi m;
    ihp = Diffmap.Id.ihp m;
    jac = Diffmap.Id.jac m;
    caj = Diffmap.Id.caj m;
    is_null = Diffmap.Id.is_null m }

let rec null ?x_min ?x_max y_min y_max =
  let m = Diffmap.Null.create ?x_min ?x_max y_min y_max in
  let with_domain ~x_min ~x_max =
    null ~x_min ~x_max y_min y_max in
  { encode = Diffmap.Null.encode m;
    with_domain = with_domain;
    x_min = Diffmap.Null.x_min m;
    x_max = Diffmap.Null.x_max m;
    y_min = Diffmap.Null.y_min m;
    y_max = Diffmap.Null.y_max m;
    phi = Diffmap.Null.phi m;
    ihp = Diffmap.Null.ihp m;
    jac = Diffmap.Null.jac m;
    caj = Diffmap.Null.caj m;
    is_null = Diffmap.Null.is_null m }

let rec power ~alpha ~eta ?x_min ?x_max y_min y_max =
  let m = Diffmap.Power.create ~alpha ~eta ?x_min ?x_max y_min y_max in
  let with_domain ~x_min ~x_max =
    power ~alpha ~eta ~x_min ~x_max y_min y_max in
  { encode = Diffmap.Power.encode m;
    with_domain = with_domain;
    x_min = Diffmap.Power.x_min m;
    x_max = Diffmap.Power.x_max m;
    y_min = Diffmap.Power.y_min m;
    y_max = Diffmap.Power.y_max m;

```

```

    phi = Diffmap.Power.phi m;
    ihp = Diffmap.Power.ihp m;
    jac = Diffmap.Power.jac m;
    caj = Diffmap.Power.caj m;
    is_null = Diffmap.Power.is_null m }

let rec resonance ~eta ~a ?x_min ?x_max y_min y_max =
  let m = Diffmap.Resonance.create ~eta ~a ?x_min ?x_max y_min y_max in
  let with_domain ~x_min ~x_max =
    resonance ~eta ~a ~x_min ~x_max y_min y_max in
  { encode = Diffmap.Resonance.encode m;
    with_domain = with_domain;
    x_min = Diffmap.Resonance.x_min m;
    x_max = Diffmap.Resonance.x_max m;
    y_min = Diffmap.Resonance.y_min m;
    y_max = Diffmap.Resonance.y_max m;
    phi = Diffmap.Resonance.phi m;
    ihp = Diffmap.Resonance.ihp m;
    jac = Diffmap.Resonance.jac m;
    caj = Diffmap.Resonance.caj m;
    is_null = Diffmap.Resonance.is_null m }

end

```

B.18 Interface of *Division*

We have divisions (*Mono*) and divisions of divisions (*Poly*). Except for creation, they share the same interface (*T*), which can be used as a signature for functor arguments. In particular, both kinds of divisions can be used with the *Grid.Make* functor.

module type *T* =

sig

type *t*

Copy a division, allocating fresh arrays with identical contents.

val *copy* : *t* → *t*

Using $\{x_0, x_1, \dots, x_n\}$, find *i*, such that $x_i \leq x < x_{i+1}$. We need to export this, if we want to maintain additional histograms in user modules.

val *find* : *t* → float → int

record *d* *x* *f* records the value *f* at coordinate *x*. NB: this function modifies *d*.

```
val record : t → float → float → unit
```

VEGAS style rebinning. The default values for *power* and both *fixed_min*, *fixed_max* are 1.5 and **false** respectively.

```
val rebin : ?power : float → ?fixed_min : bool → ?fixed_max : bool →  
t → t
```

```
J*(y)
```



Should this include the $1/\Delta y$?

```
val caj : t → float → float
```

Check if there is a *Diffmaps.Null* for *x*.

```
val is_null : t → float → bool
```

```
val null_bins : t → int list
```

```
val n_bins : t → int
```

```
val bins : t → float array
```

```
val to_channel : out_channel → t → unit
```

```
end
```

```
exception Above_max of float × (float × float) × int
```

```
exception Below_min of float × (float × float) × int
```

```
exception Out_of_range of float × (float × float)
```

```
exception Rebinning_failure of string
```

B.18.1 Primary Divisions

```
module type Mono =
```

```
sig
```

```
include T
```

create bias n x_min x_max creates a division with *n* equidistant bins spanning $[x_{\min}, x_{\max}]$. The *bias* is a function that is multiplied with the weights for VEGAS/VAMP rebinning. It can be used to highlight the regions of phasespace that are expected to be most relevant in applications. The default is **fun x → 1.0**, of course.

```
val create : ?bias : (float → float) → int → float → float → t
```

```
end
```

```
module Mono : Mono
```

B.18.2 Polydivisions

```
module type Poly =
  sig
    module M : Diffmaps.Real

    include T

    create intervals n x_min x_max creates a polydivision of the interval
    from x_min to x_max described by the list of intervals, filling the gaps among
    intervals and between the intervals and the outer borders with an unmapped
    divisions with n bins each.

    val create : ?bias : (float → float) →
      (int × M.t) list → int → float → float → t

  end

module Make_Poly (M : Diffmaps.Real) : Poly with module M = M

module Poly : Poly

module Test : sig val suite : OUnit.test end
```

B.19 Implementation of *Division*

```
open Printf

let epsilon_100 = 100.0 *. Float.Double.epsilon

let equidistant n x_min x_max =
  if n ≤ 0 then
    invalid_arg "Division.equidistant: n ≤ 0"
  else
    let delta = (x_max -. x_min) /. (float n) in
    Array.init (n + 1) (fun i → x_min +. delta *. float i)

exception Above_max of float × (float × float) × int
exception Below_min of float × (float × float) × int
exception Out_of_range of float × (float × float)
exception Rebinning_failure of string
```

```

let find_raw d x =
  let n_max = Array.length d - 1 in
  let eps = epsilon_100 *. (d.(n_max) - . d.(0)) in
  let rec find' a b =
    if b ≤ a + 1 then
      a
    else
      let m = (a + b) / 2 in
      if x < d.(m) then
        find' a m
      else
        find' m b in
  if x < d.(0) - . eps then
    raise (Below_min (x, (d.(0), d.(n_max)), 0))
  else if x > d.(n_max) + . eps then
    raise (Above_max (x, (d.(0), d.(n_max)), n_max - 1))
  else if x ≤ d.(0) then
    0
  else if x ≥ d.(n_max) then
    n_max - 1
  else
    find' 0 n_max
module type T =
  sig
    type t
    val copy : t → t
    val find : t → float → int
    val record : t → float → float → unit
    val rebin : ?power:float → ?fixed_min:bool → ?fixed_max:bool →
t → t
    val caj : t → float → float
    val is_null : t → float → bool
    val null_bins : t → int list
    val n_bins : t → int
    val bins : t → float array
    val to_channel : out_channel → t → unit
  end

```

B.19.1 Primary Divisions

```
module type Mono =
  sig
    include T
    val create : ?bias : (float → float) → int → float → float → t
  end

module Mono (* : T *) =
  struct
    type t =
      { x : float array;
        mutable x_min : float;
        mutable x_max : float;
        n : int array;
        w : float array;
        w2 : float array;
        bias : float → float }

    let copy d =
      { x = Array.copy d.x;
        x_min = d.x_min;
        x_max = d.x_max;
        n = Array.copy d.n;
        w = Array.copy d.w;
        w2 = Array.copy d.w2;
        bias = d.bias }

    let create ?(bias = fun x → 1.0) n x_min x_max =
      { x = equidistant n x_min x_max;
        x_min = x_max;
        x_max = x_min;
        n = Array.make n 0;
        w = Array.make n 0.0;
        w2 = Array.make n 0.0;
        bias = bias }

    let bins d = d.x
    let n_bins d = Array.length d.x - 1
    let find d = find_raw d.x
```

```

let normal_float x =
  match classify_float x with
  | FP_normal | FP_subnormal | FP_zero → true
  | FP_infinite | FP_nan → false

let report_denormal x f b what =
  eprintf
    "circe2: Division.record: ignoring %s (x=%g, f=%g, b=%g)\n"
    what x f b;
  flush stderr

let caj d x = 1.0
let is_null d x = false

let record d x f =
  if x < d.x_min then
    d.x_min ← x;
  if x > d.x_max then
    d.x_max ← x;
  let i = find d x in
  d.n.(i) ← succ d.n.(i);
  let b = d.bias x in
  let w = f *. b in
  match classify_float w with
  | FP_normal | FP_subnormal | FP_zero →
    d.w.(i) ← d.w.(i) +. w;
    let w2 = f *. w in
    begin match classify_float w2 with
    | FP_normal | FP_subnormal | FP_zero →
      d.w2.(i) ← d.w2.(i) +. w2
    | FP_infinite → report_denormal x f b "w2=[inf]"
    | FP_nan → report_denormal x f b "w2=[nan]"
    end
  | FP_infinite → report_denormal x f b "w2=[inf]"
  | FP_nan → report_denormal x f b "w2=[nan]"

```

$$\begin{aligned}
d_1 &\rightarrow \frac{1}{2}(d_1 + d_2) \\
d_2 &\rightarrow \frac{1}{3}(d_1 + d_2 + d_3) \\
&\dots \\
d_{n-1} &\rightarrow \frac{1}{3}(d_{n-2} + d_{n-1} + d_n) \\
d_n &\rightarrow \frac{1}{2}(d_{n-1} + d_n)
\end{aligned} \tag{95}$$

```

let smooth3 f =
  match Array.length f with
  | 0 → f
  | 1 → Array.copy f
  | 2 → Array.make 2 ((f.(0) + . f.(1)) /. 2.0)
  | n →
    let f' = Array.make n 0.0 in
    f'.(0) ← (f.(0) + . f.(1)) /. 2.0;
    for i = 1 to n - 2 do
      f'.(i) ← (f.(i - 1) + . f.(i) + . f.(i + 1)) /. 3.0
    done;
    f'.(n - 1) ← (f.(n - 2) + . f.(n - 1)) /. 2.0;
    f'

```

$$m_i = \left(\frac{\frac{\bar{f}_i \Delta x_i}{\sum_j \bar{f}_j \Delta x_j} - 1}{\ln \left(\frac{\bar{f}_i \Delta x_i}{\sum_j \bar{f}_j \Delta x_j} \right)} \right)^\alpha \tag{96}$$

```

let rebinning_weights' power fs =
  let sum_f = Array.fold_left (+.) 0.0 fs in
  if sum_f ≤ 0.0 then
    Array.make (Array.length fs) 1.0
  else
    Array.map (fun f →
      let f' = f /. sum_f in
      if f' < 1.0 · 10-12 then
        0.
      else
        ((f' - . 1.0) /. (log f')) ** power) fs

```

The nested loops can be turned into recursions, of course. But arrays aren't purely functional anyway ...


```

let rebin' m x =
  let n = Array.length x - 1 in
  let x' = Array.make (n + 1) 0.0 in
  let sum_m = Array.fold_left (+.) 0.0 m in
  if sum_m ≤ 0.0 then
    Array.copy x
  else begin
    let step = sum_m /. (float n) in
    let k = ref 0
    and delta = ref 0.0 in
    x'.(0) ← x.(0);
    for i = 1 to n - 1 do

```

We increment *k* until another Δ (a.k.a. *step*) of the integral has been accumulated.

```

      while !delta < step do
        incr k;
        delta := !delta + . m.(!k - 1)
      done;

```

Correct the mismatch.

```

      delta := !delta - . step;

```

Linearly interpolate the next bin boundary.

```

      x'.(i) ← x.(!k) - . (x.(!k) - . x.(!k - 1)) * . !delta /. m.(!k - 1);

```

```

      if x'.(i) < x'.(i - 1) then

```

```

        raise (Rebinning_failure
              (sprintf "x(%d)=%g<_%gx(%d)=%g" i x'.(i) (i-1) x'.(i-

```

```

1)))

```

```

      done;

```

```

      x'.(n) ← x.(n);

```

```

      x'

```

```

    end

```



Check that *x_min* and *x_max* are implemented correctly!!!!



One known problem is that the second outermost bins hinder the outermost bins from moving.

```

let rebin ?(power = 1.5) ?(fixed_min = false) ?(fixed_max = false) d =
  let n = Array.length d.w in
  let x = rebin' (rebinning_weights' power (smooth3 d.w2)) d.x in
  if ¬ fixed_min then
    x.(0) ← (x.(0) + . min d.x_min x.(1)) /. 2.;
  if ¬ fixed_max then
    x.(n) ← (x.(n) + . max d.x_max x.(n - 1)) /. 2.;
  { x = x;
    x_min = d.x_min;
    x_max = d.x_max;
    n = Array.make n 0;
    w = Array.make n 0.0;
    w2 = Array.make n 0.0;
    bias = d.bias }
let null_bins d = []
let to_channel oc d =
  Array.iter (fun x →
    fprintf oc "%s□0□1□0□0□1□1\n" (Float.Double.to_string x)) d.x
end

```

B.19.2 Polydivisions

```

module type Poly =
sig
  module M : Diffmaps.Real
  include T
  val create : ?bias : (float → float) →
    (int × M.t) list → int → float → float → t
end
module Make_Poly (M : Diffmaps.Real) (* : Poly *) =
struct
  module M = M

```

```

type t =
  { x : float array;
    d : Mono.t array;
    n_bins : int;
    ofs : int array;
    maps : M.t array;
    n : int array;
    w : float array;
    w2 : float array }

let copy pd =
  { x = Array.copy pd.x;
    d = Array.map Mono.copy pd.d;
    n_bins = pd.n_bins;
    ofs = Array.copy pd.ofs;
    maps = Array.copy pd.maps;
    n = Array.copy pd.n;
    w = Array.copy pd.w;
    w2 = Array.copy pd.w2 }

let n_bins pd = pd.n_bins

let find pd y =
  let i = find_raw pd.x y in
  let x = M.ihp pd.maps.(i) y in
  pd.ofs.(i) + Mono.find pd.d.(i) x

let bins pd =
  let a = Array.make (pd.n_bins + 1) 0.0 in
  let bins0 = Mono.bins pd.d.(0) in
  let len = Array.length bins0 in
  Array.blit bins0 0 a 0 len;
  let ofs = ref len in
  for i = 1 to Array.length pd.d - 1 do
    let len = Mono.n_bins pd.d.(i) in
    Array.blit (Mono.bins pd.d.(i)) 1 a !ofs len;
    ofs := !ofs + len
  done;
  a

type interval =
  { nbin : int;
    x_min : float;
    x_max : float;

```

```

    map : M.t }

let interval nbin map =
  { nbin = nbin;
    x_min = M.x_min map;
    x_max = M.x_max map;
    map = map }

let id_map n y_min y_max =
  interval n (M.id ~x_min : y_min ~x_max : y_max y_min y_max)

let sort_intervals intervals =
  List.sort (fun i1 i2 → compare i1.x_min i2.x_min) intervals

Fill the gaps between adjacent intervals, using val default : int → float → float → interval to construct intermediate intervals.

let fill_gaps default n x_min x_max intervals =
  let rec fill_gaps' prev_x_max acc = function
    | i :: rest →
      if i.x_min = prev_x_max then
        fill_gaps' i.x_max (i :: acc) rest
      else if i.x_min > prev_x_max then
        fill_gaps' i.x_max
          (i :: (default n prev_x_max i.x_min) :: acc) rest
      else
        invalid_arg "Polydivision.fill_gaps:␣overlapping"
    | [] →
      if x_max = prev_x_max then
        List.rev acc
      else if x_max > prev_x_max then
        List.rev (default n prev_x_max x_max :: acc)
      else
        invalid_arg "Polydivision.fill_gaps:␣sticking␣out"
  in match intervals with
  | i :: rest →
    if i.x_min = x_min then
      fill_gaps' i.x_max [i] rest
    else if i.x_min > x_min then
      fill_gaps' i.x_max (i :: [default n x_min i.x_min]) rest
    else
      invalid_arg "Polydivision.fill_gaps:␣sticking␣out"
  | [] → [default n x_min x_max]

```

```

let create ?bias intervals n x_min x_max =
  let intervals = List.map (fun (n, m) → interval n m) intervals in
  match fill_gaps id_map n x_min x_max (sort_intervals intervals) with
  | [] → failwith "Division.Poly.create:␣impossible"
  | interval :: _ as intervals →
    let ndiv = List.length intervals in
    let x = Array.of_list (interval.x_min ::
                          List.map (fun i → i.x_max) intervals) in
    let d = Array.of_list
      (List.map (fun i →
        Mono.create ?bias i.nbin i.x_min i.x_max) intervals) in
    let ofs = Array.make ndiv 0 in
    for i = 1 to ndiv - 1 do
      ofs.(i) ← ofs.(i - 1) + Mono.n_bins d.(i - 1)
    done;
    let n_bins = ofs.(ndiv - 1) + Mono.n_bins d.(ndiv - 1) in
    { x = x;
      d = d;
      n_bins = n_bins;
      ofs = ofs;
      maps = Array.of_list (List.map (fun i → i.map) intervals);
      n = Array.make ndiv 0;
      w = Array.make ndiv 0.0;
      w2 = Array.make ndiv 0.0 }

```

We can safely assume that $\text{find_raw } pd.x \ y = \text{find_raw } pd.x \ x$.

$$w = \frac{f}{\frac{dx}{dy}} = f \cdot \frac{dy}{dx} \quad (97)$$

Here, the jacobian makes no difference for the final result, but it steers VEGAS/VAMP into the right direction.

```

let caj pd y =
  let i = find_raw pd.x y in
  let m = pd.maps.(i)
  and d = pd.d.(i) in
  let x = M.ihp m y in
  M.caj m y *. Mono.caj d x

```

```

let is_null pd y =
  let i = find_raw pd.x y in
  let m = pd.maps.(i) in
  M.is_null m

let record pd y f =
  let i = find_raw pd.x y in
  let m = pd.maps.(i) in
  if M.is_null m then
    ()
  else
    let x = M.ihp m y in
    let w = M.jac m x *. f in
    Mono.record pd.d.(i) x w;
    pd.n.(i) ← succ pd.n.(i);
    pd.w.(i) ← pd.w.(i) +. w;
    pd.w2.(i) ← pd.w2.(i) +. w *. w

```

Rebin the divisions, enforcing fixed boundaries for the inner intervals.

```

let rebin ?(power = 1.5) ?(fixed_min = false) ?(fixed_max = false) pd =
  let ndiv = Array.length pd.d in
  let rebin_mono i d =
    if ndiv ≤ 1 then
      Mono.rebin ~power ~fixed_min ~fixed_max d
    else if i = 0 then
      Mono.rebin ~power ~fixed_min ~fixed_max :true d
    else if i = ndiv - 1 then
      Mono.rebin ~power ~fixed_min :true ~fixed_max d
    else
      Mono.rebin ~power ~fixed_min :true ~fixed_max :true d in
  { x = Array.copy pd.x;
    d = Array.init ndiv (fun i → rebin_mono i pd.d.(i));
    n_bins = pd.n_bins;
    ofs = pd.ofs;
    maps = Array.copy pd.maps;
    n = Array.make ndiv 0;
    w = Array.make ndiv 0.0;
    w2 = Array.make ndiv 0.0 }

let range n1 n2 =
  let rec range' n =
    if n > n2 then

```

```

    []
  else
    n :: range' (succ n) in
  range' n1

let null_bins pd =
  let num_intervals = Array.length pd.d in
  let rec null_bins' (acc, i) n =
    if n ≥ num_intervals then
      List.rev acc
    else
      let d = pd.d.(n) in
      let i' = i + Mono.n_bins d in
      if M.is_null pd.maps.(n) then
        null_bins' (List.rev_append (range i (pred i')) acc, i') (succ n)
      else
        null_bins' (acc, i') (succ n) in
  null_bins' ([], 0) 0

let to_channel oc pd =
  for i = 0 to Array.length pd.d - 1 do
    let map = M.encode pd.maps.(i)
    and bins = Mono.bins pd.d.(i)
    and j0 = if i = 0 then 0 else 1 in
    for j = j0 to Array.length bins - 1 do
      fprintf oc "%s%s\n" (Float.Double.to_string bins.(j)) map;
    done
  done

end

module Poly = Make_Poly (Diffmaps.Default)

module Test =
  struct
    open OUnit

    let int_list_to_string l =
      "[" ^ String.concat "; " (List.map string_of_int l) ^ "]"

    let assert_int_list = assert_equal ~printer : int_list_to_string

    module D = Poly
    module M = D.M
  end

```

```

let null_maps maps =
  D.null_bins (D.create maps 100 0. 1.)

let null_map_suite =
  "null_map" >::
  [ "0" >:: (fun () →
    assert_int_list [0] (null_maps [(1, M.null 0. 0.1)]));
    "0;1;2" >:: (fun () →
    assert_int_list [0; 1; 2] (null_maps [(3, M.null 0. 0.1)]));
    "100" >:: (fun () →
    assert_int_list [100] (null_maps [(1, M.null 0.1 0.2)]));
    "100;201" >:: (fun () →
    assert_int_list [100; 201] (null_maps [(1, M.null 0.1 0.2);
    (1, M.null 0.3 0.4)]));
    "100;101;202;203;204" >:: (fun () →
    assert_int_list [100; 101; 202; 203; 204] (null_maps [(2, M.null 0.1 0.2);
    (3, M.null 0.3 0.4)])) ]

let suite =
  let open OUnit in
    "Division" >::
    [null_map_suite]
end

```

B.20 Interface of *Grid*

```

exception Out_of_range of string × float × (float × float)

module type T =
  sig
    module D : Division.T

    type t
    val copy : t → t

    Create an initial grid.

    val create : ?triangle:bool → D.t → D.t → t

    record grid x1 x2 w records the value w in the bin corresponding to
    coordinates x1 and x2.

    val record : t → float → float → float → unit
  end

```


VEGAS style rebinning.

```
val rebin : ?power : float →  
    ?fixed_x1_min : bool → ?fixed_x1_max : bool →  
    ?fixed_x2_min : bool → ?fixed_x2_max : bool → t → t
```

The sum of all the weights shall be one.

```
val normalize : t → t
```

Adapt an initial grid to data. The *power* controls speed vs. stability of adaption and is passed on to *Division.rebin*. *iterations* provides a hard cutoff for the number of iterations (default: 1000), while *margin* and *cutoff* control the soft cutoff of the adaption. If the variance grows to the best value multiplied by *margin* or if there are no improvements for *cutoff* steps, the adaption is stopped (defaults: 1.5 and 20). The remaining options control if the boundaries are fixed or allowed to move towards the limits of the dataset. The defaults are all **false**, meaning that the boundaries are allowed to move.

```
val of_bigarray : ?verbose : bool → ?power : float →  
    ?iterations : int → ?margin : float → ?cutoff : int →  
    ?fixed_x1_min : bool → ?fixed_x1_max : bool →  
    ?fixed_x2_min : bool → ?fixed_x2_max : bool →  
    ?areas : Syntax.area list →  
    (float, Bigarray.float64_elt,  
     Bigarray.fortran_layout) Bigarray.Array2.t → t → t  
  
val smooth : float → Syntax.area → t → t  
  
val variance_area : Syntax.area → t → float  
  
val to_channel_2d : out_channel → t → unit
```

Write output that **circe2** can read:

```
type channel =  
    { pid1 : int;  
      pol1 : int;  
      pid2 : int;  
      pol2 : int;  
      lumi : float;  
      g : t }  
  
val to_channel : out_channel → channel → unit
```

```

type design =
  { name : string;
    roots : float;
    channels : channel list;
    comments : string list }

val design_to_channel : out_channel → design → unit
val designs_to_channel : out_channel →
  ?comments : string list → design list → unit
val designs_to_file : string →
  ?comments : string list → design list → unit

val variance : t → float

end

module Make (D : Division.T) : T with module D = D

```

B.21 Implementation of *Grid*

```

exception Out_of_range of string × float × (float × float)

open Printf

module type T =
  sig
    module D : Division.T

    type t
    val copy : t → t
    val create : ?triangle : bool → D.t → D.t → t
    val record : t → float → float → float → unit

    val rebin : ?power : float →
      ?fixed_x1_min : bool → ?fixed_x1_max : bool →
      ?fixed_x2_min : bool → ?fixed_x2_max : bool → t → t

    val normalize : t → t

    val of_bigarray : ?verbose : bool → ?power : float →
      ?iterations : int → ?margin : float → ?cutoff : int →
      ?fixed_x1_min : bool → ?fixed_x1_max : bool →
      ?fixed_x2_min : bool → ?fixed_x2_max : bool →
      ?areas : Syntax.area list →
      (float, Bigarray.float64_elt,
       Bigarray.fortran_layout) Bigarray.Array2.t → t → t
  end

```

```

val smooth : float → Syntax.area → t → t
val variance_area : Syntax.area → t → float
val to_channel_2d : out_channel → t → unit

type channel =
  { pid1 : int;
    pol1 : int;
    pid2 : int;
    pol2 : int;
    lumi : float;
    g : t }

val to_channel : out_channel → channel → unit

type design =
  { name : string;
    roots : float;
    channels : channel list;
    comments : string list }

val design_to_channel : out_channel → design → unit
val designs_to_channel : out_channel →
  ?comments:string list → design list → unit
val designs_to_file : string →
  ?comments:string list → design list → unit

val variance : t → float

end

module Make (D : Division.T) =
struct
  module D = D

  type t =
    { d1 : D.t;
      d2 : D.t;
      w : float array array;
      var : float array array;
      triangle : bool }

```

```

let copy grid =
  { d1 = D.copy grid.d1;
    d2 = D.copy grid.d2;
    w = ThoMatrix.copy grid.w;
    var = ThoMatrix.copy grid.var;
    triangle = grid.triangle }

let create ?(triangle = false) d1 d2 =
  let n1 = D.n_bins d1
  and n2 = D.n_bins d2 in
  { d1 = d1;
    d2 = d2;
    w = Array.make_matrix n1 n2 0.0;
    var = Array.make_matrix n1 n2 0.0;
    triangle = triangle }

```

We need

$$\text{upper } x] = \text{lower } [x \quad (98a)$$

$$\text{upper } x] = \text{lower } (x - 1 \quad (98b)$$

$$\text{upper } x) = \text{lower } [x - 1 \quad (98c)$$

$$\text{upper } x) = \text{lower } (x - 2 \quad (98d)$$

and

$$\text{upper } x] = \text{upper } x) + 1 \quad (99a)$$

$$\text{lower } [x = \text{lower } (x - 1 \quad (99b)$$

lower_bin had *Open* and *Closed* mixed up! (tho:2014-12-09)

```

let lower_bin div limit =
  try
    begin match limit with
    | Syntax.Closed x → D.find div x
    | Syntax.Open x → D.find div x + 1
    | Syntax.Bin n → n
    end
  with
  | Division.Below_min (_, _, n) → n
  | Division.Above_max (x, range, _) →
      raise (Out_of_range ("Grid.lower_bin", x, range))

```

```

let upper_bin div limit =
  try
    begin match limit with
    | Syntax.Closed x → D.find div x
    | Syntax.Open x → D.find div x - 1
    | Syntax.Bin n → n
    end
  with
  | Division.Above_max (_, _, n) → n
  | Division.Below_min (x, range, _) →
      raise (Out_of_range ("Grid.upper_bin", x, range))

let enclosed_bins div (x1, x2) =
  (lower_bin div x1, upper_bin div x2)

let enclosing_bin div = function
| Syntax.Delta x → D.find div x
| Syntax.Box n → n

let smooth width area grid =
  let gaussian = Filter.gaussian width in
  let w =
    begin match area with
    | Syntax.Rect (i1, i2) →
        let nx1, nx2 = enclosed_bins grid.d1 i1
        and ny1, ny2 = enclosed_bins grid.d2 i2 in
        Filter.apply1
          ~inf1 : nx1 ~sup1 : nx2 ~inf2 : ny1 ~sup2 : ny2
          gaussian gaussian grid.w
    | Syntax.Slice1 (i1, y) →
        let nx1, nx2 = enclosed_bins grid.d1 i1
        and ny = enclosing_bin grid.d2 y in
        Filter.apply1
          ~inf1 : nx1 ~sup1 : nx2 ~inf2 : ny ~sup2 : ny
          gaussian grid.w
    | Syntax.Slice2 (x, i2) →
        let nx = enclosing_bin grid.d1 x
        and ny1, ny2 = enclosed_bins grid.d2 i2 in
        Filter.apply2
          ~inf1 : nx ~sup1 : nx ~inf2 : ny1 ~sup2 : ny2
          gaussian grid.w
    end in
  { grid with w }

```

```

let nullify grid =
  let grid = copy grid in
  List.iter
    (fun i1 →
      for i2 = 0 to D.n_bins grid.d2 - 1 do
        grid.w.(i1).(i2) ← 0.
      done)
    (D.null_bins grid.d1);
  List.iter
    (fun i2 →
      for i1 = 0 to D.n_bins grid.d1 - 1 do
        grid.w.(i1).(i2) ← 0.
      done)
    (D.null_bins grid.d2);
  grid

let normalize grid =
  let sum_w = ThoMatrix.sum_float grid.w in
  if sum_w > 0. then
    { d1 = D.copy grid.d1;
      d2 = D.copy grid.d2;
      w = ThoMatrix.map (fun w → w /. sum_w) grid.w;
      var = ThoMatrix.copy grid.var;
      triangle = grid.triangle }
  else
    failwith "Grid.normalize: non-positive sum of weights"

let to_channel_2d oc grid =
  let grid = normalize (nullify grid) in
  for i = 0 to D.n_bins grid.d1 - 1 do
    Printf.fprintf oc "%g" grid.w.(i).(0);
    for j = 1 to D.n_bins grid.d2 - 1 do
      Printf.fprintf oc " %g" grid.w.(i).(j)
    done;
    Printf.fprintf oc "\n"
  done

let project_triangle triangle x y =
  if triangle then begin
    if x ≥ y then begin
      (x, y /. x)
    end else begin
      (y, x /. y)
    end
  end

```

```

end
end else
(x, y)

```

Note that there is *no* jacobian here. It is applied later by the Fortran program interpreting the grid as a distribution. It is not needed for the event generator anyway.

```

let record grid x y f =
  if  $\neg$  (D.is_null grid.d1 x  $\vee$  D.is_null grid.d2 y) then
    let x', y' = project_triangle grid.triangle x y in
    D.record grid.d1 x' f;
    D.record grid.d2 y' f;
    let n1 = D.find grid.d1 x'
    and n2 = D.find grid.d2 y' in
    grid.w.(n1).(n2)  $\leftarrow$  grid.w.(n1).(n2) + . f;
    grid.var.(n1).(n2)  $\leftarrow$  grid.var.(n1).(n2) + . f /. D.caj grid.d1 x' /. D.caj grid.d2 y'
  let rebin ?power ?fixed_x1_min ?fixed_x1_max
    ?fixed_x2_min ?fixed_x2_max grid =
    let n1 = D.n_bins grid.d1
    and n2 = D.n_bins grid.d2 in
    { d1 = D.rebin ?power
      ?fixed_min : fixed_x1_min ?fixed_max : fixed_x1_max grid.d1;
      d2 = D.rebin ?power
        ?fixed_min : fixed_x2_min ?fixed_max : fixed_x2_max grid.d2;
      w = Array.make_matrix n1 n2 0.0;
      var = Array.make_matrix n1 n2 0.0;
      triangle = grid.triangle }

```

Monitoring the variance in each cell is *not* a good idea for approximating distributions of unweighted events: it always vanishes for unweighted events, even if they are distributed very unevenly. Therefore, we monitor the *global* variance instead:

```

let variance_area area grid =
  let (nx1, nx2), (ny1, ny2) =
    begin match area with
    | Syntax.Rect (i1, i2)  $\rightarrow$ 
      (enclosed_bins grid.d1 i1, enclosed_bins grid.d2 i2)
    | Syntax.Slice1 (i1, y)  $\rightarrow$ 
      let ny = enclosing_bin grid.d2 y in
      (enclosed_bins grid.d1 i1, (ny, ny))
    | Syntax.Slice2 (x, i2)  $\rightarrow$ 

```

```

        let nx = enclosing_bin grid.d1 x in
        ((nx, nx), enclosed_bins grid.d2 i2)
    end in
let n = float ((nx2 - nx1 + 1) × (ny2 - ny1 + 1)) in
let w =
    ThoMatrix.sum_float
    ~inf1 : nx1 ~sup1 : nx2 ~inf2 : ny1 ~sup2 : ny2 grid.w /. n
and w2 =
    ThoMatrix.fold_left
    ~inf1 : nx1 ~sup1 : nx2 ~inf2 : ny1 ~sup2 : ny2
    (fun acc w → acc + . w *. w) 0.0 grid.w /. n in
w2 - . w *. w

let variance grid =
let n = float (D.n_bins grid.d1 × D.n_bins grid.d2) in
let w = ThoMatrix.sum_float grid.w /. n
and w2 =
    ThoMatrix.fold_left (fun acc w → acc + . w *. w) 0.0 grid.w /. n in
w2 - . w *. w

```

Find the grid with the lowest variance. Allow local fluctuations and stop only after moving to twice the lowest value.

```

let start_progress_report verbose var =
    if verbose then begin
        eprintf "adapting variance: %g" var;
        flush stderr
    end

let progress_report verbose soft_limit best_var var =
    if verbose then begin
        if var < best_var then begin
            eprintf ", %g" var;
            flush stderr
        end else begin
            eprintf "[%d]" soft_limit;
            flush stderr
        end
    end

let stop_progress_report verbose =
    if verbose then begin
        eprintf "\ndone.\n";
        flush stderr
    end

```


end

Scan a bigarray. Assume a uniform weight, if it has only 2 columns.

```
let record_data data grid =
  let columns = Bigarray.Array2.dim1 data in
  if columns < 2 then
    eprintf "error: not enough columns"
  else
    for i2 = 1 to Bigarray.Array2.dim2 data do
      let x = Bigarray.Array2.get data 1 i2
      and y = Bigarray.Array2.get data 2 i2
      and w =
        if columns > 2 then
          Bigarray.Array2.get data 3 i2
        else
          1.0 in
      try
        record grid x y w
      with
      | Division.Out_of_range (x, (x_min, x_max)) →
        eprintf "internal error: %g not in [%g,%g]\n" x x_min x_max
    done
```

The main routine constructing an adapted grid.

```
let of_bigarray ?(verbose = false)
  ?power ?(iterations = 1000) ?(margin = 1.5) ?(cutoff = 10)
  ?fixed_x1_min ?fixed_x1_max ?fixed_x2_min ?fixed_x2_max
  ?areas data initial =
  let rebinner grid =
    rebin ?power
      ?fixed_x1_min ?fixed_x1_max ?fixed_x2_min ?fixed_x2_max grid in
  let rec improve_bigarray hard_limit soft_limit best_var best_grid grid =
    if soft_limit ≤ 0 ∨ hard_limit ≤ 0 then
      normalize best_grid
    else begin
      record_data data grid;
      let var = variance grid in
      begin match areas with
      | None | Some [] → ()
      | Some areas →
        let normalized_grid = normalize grid in
```

```

let variances =
  List.map
    (fun area →
      variance_area area normalized_grid) areas in
let msg =
  "␣(" ^ Printf.sprintf "%g" (variance normalized_grid) ^ " :␣" ^
  String.concat ";␣"
    (List.map (fun x → Printf.sprintf "%g" x) variances) ^
  ")" in
prerr_string msg;
flush stderr
end;
progress_report verbose soft_limit best_var var;
if var ≥ margin *. best_var then
  normalize best_grid
else
  let best_var, best_grid, soft_limit =
    if var < best_var then
      (var, grid, cutoff)
    else
      (best_var, best_grid, pred soft_limit) in

```

Continuation passing makes recursion with exception handling tail recursive. This is not really needed, because the data structures are not too big and recursion is not expected to be too deep. It doesn't hurt either, since the idiom is sufficiently transparent.

```

let continue =
  try
    let grid' = rebinner grid in
    fun () → improve_bigarray
      (pred hard_limit) soft_limit best_var best_grid grid'
  with
  | Division.Rebinning_failure msg →
    eprintf "circe2:␣rebinning␣failed:␣%s!\n" msg;
    fun () → best_grid in
continue ()
end in

record_data data initial;
let var = variance initial in
start_progress_report verbose var;

```

```

let result =
  improve_bigarray iterations cutoff var initial (rebinner initial) in
  stop_progress_report verbose;
  result

type channel =
  { pid1 : int;
    pol1 : int;
    pid2 : int;
    pol2 : int;
    lumi : float;
    g : t }

```

NB: we need to transpose the weight matrix to get from our row major to Fortran's column major array format expected by `circe2`!

```

let to_channel oc ch =
  fprintf oc "pid1,␣pol1,␣pid2,␣pol2,␣lumi\n";
  fprintf oc "␣%d␣%d␣%d␣%d␣%G\n"
    ch.pid1 ch.pol1 ch.pid2 ch.pol2 ch.lumi;
  let g = normalize (nullify ch.g) in
  fprintf oc "#bins1,␣#bins2,␣triangle?\n";
  fprintf oc "␣%d␣%d␣%s\n"
    (D.n_bins g.d1) (D.n_bins g.d2) (if g.triangle then "T" else "F");
  fprintf oc "x1,␣map1,␣alpha1,␣xi1,␣eta1,␣a1,␣b1\n";
  D.to_channel oc g.d1;
  fprintf oc "x2,␣map2,␣alpha2,␣xi2,␣eta2,␣a2,␣b2\n";
  D.to_channel oc g.d2;
  fprintf oc "weights\n";
  ThoMatrix.iter
    (fun x → fprintf oc "␣%s\n" (Float.Double.to_string x))
    (ThoMatrix.transpose g.w)

type design =
  { name : string;
    roots : float;
    channels : channel list;
    comments : string list }

type polarization_support =
  | Averaged
  | Helicities
  | Density_Matrices

```

```

let polarization_support design =
  if List.for_all (fun ch → ch.pol1 = 0 ∧ ch.pol2 = 0)
    design.channels then
    Averaged
  else if List.for_all (fun ch → ch.pol1 ≠ 0 ∧ ch.pol2 ≠ 0)
    design.channels then
    Helicities
  else
    invalid_arg
      "Grid.polarization_support: mixed polarization support!"

let format_polarization_support = function
| Averaged → "averaged"
| Helicities → "helicities"
| Density_Matrices → "density_matrices"

let getlogin () =
  (Unix.getpwuid (Unix.getuid ())).Unix.pw_name

let design_to_channel oc design =
  let utc = Unix.gmtime (Unix.time ()) in
  List.iter (fun s → fprintf oc "!%s\n" s) design.comments;
  fprintf oc "!_generated_with_%s_by_%s@%s,_"
    (Sys.argv.(0)) (getlogin ()) (Unix.gethostname ());
  fprintf oc "%4.4d/%2.2d/%2.2d_%2.2d:%2.2d:%2.2d_GMT\n"
    (utc.Unix.tm_year + 1900) (utc.Unix.tm_mon + 1) utc.Unix.tm_mday
    utc.Unix.tm_hour utc.Unix.tm_min utc.Unix.tm_sec;
  fprintf oc "CIRCE2_FORMAT#1\n";
  fprintf oc "design,_roots\n";
  fprintf oc "_'%s'_%G\n" design.name design.roots;
  fprintf oc "#channels,_pol.support\n";
  fprintf oc "_%d_'%s'\n"
    (List.length design.channels)
    (format_polarization_support (polarization_support design));
  List.iter (to_channel oc) design.channels;
  fprintf oc "ECRIC2\n"

let designs_to_channel oc ?(comments = []) designs =
  List.iter (fun c → fprintf oc "!%s\n" c) comments;
  List.iter (design_to_channel oc) designs

let designs_to_file name ?comments designs =
  let oc = open_out name in
  designs_to_channel oc ?comments designs;

```

```

        close_out oc
    end

```

B.22 Interface of *Events*

We’re dealing with Fortran style `DOUBLE PRECISION` arrays exclusively.

```

type t =
    (float, Bigarray.float64_elt, Bigarray.fortran_layout) Bigarray.Array2.t

```

Read an ASCII representation of a big array from a channel or a file. The array is read in pieces of *chunk* columns each; the default value for *chunk* is 100000. The number of rows is given by the integer argument, while the number of columns is determined by the number of lines in the file. If the *file* argument is present the resulting bigarray is mapped to a file.

```

val of_ascii_channel : ?file:string → ?chunk:int → int → in_channel → t
val of_ascii_file   : ?file:string → ?chunk:int → int → string → t

```

Map a file containing a binary representation of a big array. The number of rows is again given by the argument and the number of columns is determined by the size of the file. The first version does a read-only (or rather copy-on-write) map, while the second version allows modifications.

```

val of_binary_file : int → string → t
val shared_map_binary_file : int → string → t

```

Selfexplaining, hopefully ...

```

val to_ascii_channel : out_channel → t → unit
val to_ascii_file   : string → t → unit
val to_binary_file  : string → t → unit

```

Rescale the entries.

```

val rescale : float → float → t → unit

```

Utilities for reading ASCII representations.

```

val next_float : Lexing.lexbuf → float

```

B.23 Implementation of *Events*

B.23.1 Reading Bigarrays

Reading big arrays efficiently is not trivial, if we don’t know the size of the arrays beforehand. Here we use the brute force approach of reading a list

of not-so-big arrays and blitting them into the resulting array later. This avoids a second reading of the file, but temporarily needs twice the memory.

```
open Bigarray
open Printf

let map_array2 fd kind layout shared dim1 dim2 =
  array2_of_genarray (Unix.map_file fd kind layout shared [|dim1; dim2|])

type t = (float, float64_elt, fortran_layout) Array2.t

exception Incomplete of int × t
```

Read lines from a channel into the columns of a bigarray. If the file turns out to be short, the exception *Incomplete* (*i2*, *array*) is raised with the number of columns actually read.

```
let read_lines ic reader array i2_first i2_last =
  let i2 = ref i2_first in
  try
    while !i2 ≤ i2_last do
      let line = input_line ic in
      if line ≠ "" then begin
        reader array !i2 line;
        incr i2
      end
    done
  with
  | End_of_file → raise (Incomplete (pred !i2, array))

let next_float lexbuf =
  match Events_lexer.token lexbuf with
  | None → invalid_arg ("Events.next_float: expected float")
  | Some x → x
```

Decode a line of floating point numbers into a column of a bigarray.

```
let read_floats array i2 line =
  let lexbuf = Lexing.from_string line in
  try
    for i1 = 1 to Array2.dim1 array do
      match Events_lexer.token lexbuf with
      | None → invalid_arg ("not enough floats in \"\" ^ line ^ \"\"")
      | Some x → Array2.set array i1 i2 x
    done
  with
  with
```

```
| Failure t →
    invalid_arg ("invalid_token'" ^ t ^ "'_in\"" ^ line ^ "\"")
```

Try to read the columns of a bigarray from a channel. If the file turns out to be short, the exception *Incomplete* (*dim2*, *array*) is raised with the number of columns actually read.

```
let try_of_ascii_channel dim1 dim2 ic =
  let array = Array2.create float64 fortran_layout dim1 dim2 in
  read_lines ic read_floats array 1 dim2;
  (dim2, array)
```

Read a *dim1* floating point numbers per line into the columns of a reverted list of bigarrays, each with a maximum of *chunk* columns.

```
let rev_list_of_ascii_channel chunk dim1 ic =
  let rec rev_list_of_ascii_channel' acc =
    let continue =
      try
        let acc' = try_of_ascii_channel dim1 chunk ic :: acc in
        fun () → rev_list_of_ascii_channel' acc'
      with
        | Incomplete (len, a) → fun () → (len, a) :: acc in
    continue () in
  rev_list_of_ascii_channel' []
```

Concatenate a list of bigarrays $[(l_n, a_n); \dots; (l_2, a_2); (l_1, a_1)]$ in reverse order $a_1 a_2 \dots a_n$. Of each array a_i , only the first l_i columns are used. If the optional *file* name is present, map the corresponding file to the bigarray. We can close the file descriptor immediately, since `close(2)` does *not* `munmap(2)`.

```
let create_array ?file dim1 dim2 =
  match file with
  | None → Array2.create float64 fortran_layout dim1 dim2
  | Some name →
    let fd =
      Unix.openfile name
        [Unix.O_RDWR; Unix.O_CREAT; Unix.O_TRUNC] 644 in
    let a = map_array2 fd float64 fortran_layout true dim1 dim2 in
    Unix.close fd;
    a
```

```

let rev_concat ?file arrays =
  let sum_dim2 =
    List.fold_left (fun sum (dim2, _) → sum + dim2) 0 arrays in
  if sum_dim2 ≤ 0 then
    invalid_arg "Events.rev_concat";
  let dim1 = Array2.dim1 (snd (List.hd arrays)) in
  let array = create_array ?file dim1 sum_dim2 in
  let _ = List.fold_right
    (fun (dim2, a) ofs →
      Array2.blit
        (Array2.sub_right a 1 dim2) (Array2.sub_right array ofs dim2);
      ofs + dim2)
    arrays 1 in
  array

let of_ascii_channel ?file ?(chunk = 100000) dim1 ic =
  rev_concat ?file (rev_list_of_ascii_channel chunk dim1 ic)

let of_ascii_file ?file ?chunk dim1 name =
  let ic = open_in name in
  let a = of_ascii_channel ?file ?chunk dim1 ic in
  close_in ic;
  a

```

We can close the file descriptor immediately, since `close(2)` does *not* `munmap(2)`.

```

let of_binary_file dim1 file =
  let fd = Unix.openfile file [Unix.O_RDONLY] 6448 in
  let a = map_array2 fd float64 fortran_layout false dim1 (-1) in
  Unix.close fd;
  a

let shared_map_binary_file dim1 file =
  let fd = Unix.openfile file [Unix.O_RDWR] 6448 in
  let a = map_array2 fd float64 fortran_layout false dim1 (-1) in
  Unix.close fd;
  a

let to_ascii_channel oc a =
  let dim1 = Array2.dim1 a
  and dim2 = Array2.dim2 a in
  for i2 = 1 to dim2 do
    for i1 = 1 to dim1 do
      fprintf oc "%17E" (Array2.get a i1 i2)
    done;

```



```

    fprintf oc "\n"
done
let to_ascii_file name a =
  let oc = open_out name in
  to_ascii_channel oc a;
  close_out oc
let to_binary_file file a =
  let fd =
    Unix.openfile file
      [Unix.O_RDWR; Unix.O_CREAT; Unix.O_TRUNC] 644 in
  let a' =
    map_array2 fd float64 fortran_layout true (Array2.dim1 a) (Array2.dim2 a) in
  Unix.close fd;
  Array2.blit a a'
let rescale scale1 scale2 data =
  for i2 = 1 to Array2.dim2 data do
    Array2.set data 1 i2 (Array2.get data 1 i2 /. scale1);
    Array2.set data 2 i2 (Array2.get data 2 i2 /. scale2)
done

```

B.24 Interface of *Syntax*

```
exception Syntax_Error of string × int × int
```

B.25 Abstract Syntax and Default Values

```
val epsilon : float
```

A channel is uniquely specified by PDG particle ids and polarizations $\{-1, 0, +1\}$, which must match the ‘events’ in the given file; as should the luminosity. The options are for tuning the grid.

```

type boundary =
| Closed of float
| Open of float
| Bin of int
type point =
| Delta of float
| Box of int

```

```

type interval = boundary × boundary

type area =
| Rect of interval × interval
| Slice1 of interval × point
| Slice2 of point × interval

type channel =
{ pid1 : int;
  pol1 : int;
  pid2 : int;
  pol2 : int;
  lumi : float;
  bins1 : int;
  scale1 : float option;
  x1_min : float;
  x1_max : float;
  fixed_x1_min : bool;
  fixed_x1_max : bool;
  intervals1 : (int × Diffmaps.Default.t) list;
  bins2 : int;
  scale2 : float option;
  x2_min : float;
  x2_max : float;
  fixed_x2_min : bool;
  fixed_x2_max : bool;
  intervals2 : (int × Diffmaps.Default.t) list;
  smooth : (float × area) list;
  triangle : bool;
  iterations : int;
  events : string;
  histogram : string option;
  binary : bool;
  columns : int }

```

A parameter set is uniquely specified by PDG particle ids (*par abus de langage*), polarizations (now a floating point number for the effective polarization of the beam), and center of mass energy. This must match the ‘events’ in the files given for the channels. The other options are for tuning the grid.

```

type design =
{ design : string;
  roots : float;

```

```

    design_bins1 : int;
    design_bins2 : int;
    design_scale1 : float option;
    design_scale2 : float option;
    channels : channel list;
    comments : string list }

val default_design : design
val default_channel : design → channel

One file can hold more than one grid.

type file = { name : string; designs : design list }
val default_file : file
type t = file list

type coord = X1 | X2 | X12
type side = Min | Max | Minmax

type channel_cmd =
  | Pid of int × coord
  | Pol of int × coord
  | Lumi of float
  | Xmin of float × coord
  | Xmax of float × coord
  | Bins of int × coord
  | Scale of float × coord
  | Diffmap of (int × Diffmaps.Default.t) × coord
  | Smooth of float × area
  | Triangle of bool
  | Iterations of int
  | Events of string
  | Histogram of string
  | Binary of bool
  | Columns of int
  | Fix of bool × coord × side

type design_cmd =
  | Design of string
  | Roots of float
  | Design_Bins of int × coord
  | Design_Scale of float × coord
  | Channels of channel_cmd list
  | Comment of string

```

```

type file_cmd =
  | File of string
  | Designs of design_cmd list
type file_cmds = file_cmd list

```

B.26 Implementation of *Syntax*

```

exception Syntax_Error of string × int × int
let epsilon = 100. *. epsilon_float

type boundary =
  | Closed of float
  | Open of float
  | Bin of int

type point =
  | Delta of float
  | Box of int

type interval = boundary × boundary

type area =
  | Rect of interval × interval
  | Slice1 of interval × point
  | Slice2 of point × interval

type channel =
  { pid1 : int;
    pol1 : int;
    pid2 : int;
    pol2 : int;
    lumi : float;
    bins1 : int;
    scale1 : float option;
    x1_min : float;
    x1_max : float;
    fixed_x1_min : bool;
    fixed_x1_max : bool;
    intervals1 : (int × Diffmaps.Default.t) list;
    bins2 : int;
    scale2 : float option;
    x2_min : float;
    x2_max : float;
  }

```

```

    fixed_x2_min : bool;
    fixed_x2_max : bool;
    intervals2 : (int × Diffmaps.Default.t) list;
    smooth : (float × area) list;
    triangle : bool;
    iterations : int;
    events : string;
    histogram : string option;
    binary : bool;
    columns : int }

type design =
{ design : string;
  roots : float;
  design_bins1 : int;
  design_bins2 : int;
  design_scale1 : float option;
  design_scale2 : float option;
  channels : channel list;
  comments : string list }

let default_design =
{ design = "TESLA";
  roots = 500.0;
  design_bins1 = 20;
  design_bins2 = 20;
  design_scale1 = None;
  design_scale2 = None;
  channels = [];
  comments = [] }

let default_channel design =
{ pid1 = 11 (* e- *);
  pol1 = 0;
  pid2 = -11 (* e+ *);
  pol2 = 0;
  lumi = 0.0;
  bins1 = design.design_bins1;
  scale1 = design.design_scale1;
  x1_min = 0.0;
  x1_max = 1.0;
  fixed_x1_min = false;
  fixed_x1_max = false;

```

```

    intervals1 = [];
    bins2 = design.design_bins2;
    scale2 = design.design_scale2;
    x2_min = 0.0;
    x2_max = 1.0;
    fixed_x2_min = false;
    fixed_x2_max = false;
    intervals2 = [];
    smooth = [];
    triangle = false;
    iterations = 1000;
    events = "circe2.events";
    histogram = None;
    binary = false;
    columns = 3 }

type file = { name : string; designs : design list }

let default_file = { name = "circe2-tool.out"; designs = [] }

type t = file list

type coord = X1 | X2 | X12
type side = Min | Max | Minmax

type channel_cmd =
  | Pid of int × coord
  | Pol of int × coord
  | Lumi of float
  | Xmin of float × coord
  | Xmax of float × coord
  | Bins of int × coord
  | Scale of float × coord
  | Diffmap of (int × Diffmaps.Default.t) × coord
  | Smooth of float × area
  | Triangle of bool
  | Iterations of int
  | Events of string
  | Histogram of string
  | Binary of bool
  | Columns of int
  | Fix of bool × coord × side

```

```

type design_cmd =
  | Design of string
  | Roots of float
  | Design_Bins of int × coord
  | Design_Scale of float × coord
  | Channels of channel_cmd list
  | Comment of string

type file_cmd =
  | File of string
  | Designs of design_cmd list

type file_cmds = file_cmd list

```

Module Lexer (Lex)

```

{
open Parser
let unquote s =
  String.sub s 1 (String.length s - 2)
}

let digit = ['0'-'9']
let upper = ['A'-'Z']
let lower = ['a'-'z']
let char = upper | lower
let white = [' ' '\t' '\n']

rule token = parse
  white { token lexbuf } (* skip blanks *)
  | '#' ['\n']* '\n'
    { token lexbuf } (* skip comments *)
  | ['+' '-' ]? digit+
    ( '.' digit* ( ['e' 'E'] '-'? digit+ )? | ['e' 'E'] '-'? digit+ )
    { FLOAT (float_of_string (Lexing.lexeme lexbuf)) }
  | ['+' '-' ]? digit+
    { INT (int_of_string (Lexing.lexeme lexbuf)) }
  | '"' ['\"']* '"'
    { STRING (unquote (Lexing.lexeme lexbuf)) }
  | '/' { SLASH }
  | '[' { LBRACKET }
  | '(' { LPAREN }

```

```

| '<' { ANGLE }
| ', ' { COMMA }
| ']' { RBRACKET }
| ')' { RPAREN }
| '>' { RANGLE }
| '{' { LBRACE }
| '}' { RBRACE }
| '=' { EQUALS }
| '*' { STAR }
| '+' { PLUS }
| '-' { MINUS }
| "antimuon" { Antimuon }
| "ascii" { Ascii }
| "beta" { Beta }
| "binary" { Binary }
| "bins" { Bins }
| "center" { Center }
| "columns" { Columns }
| "comment" { Comment }
| "design" { Design }
| "electron" { Electron }
| "eta" { Eta }
| "events" { Events }
| "file" { File }
| "fix" { Fix }
| "free" { Free }
| "gamma" { Photon }
| "histogram" { Histogram }
| "id" { Id }
| "iterations" { Iterations }
| "lumi" { Lumi }
| "map" { Map }
| "max" { Max }
| "min" { Min }
| "muon" { Muon }
| "notriangle" { Notriangle }
| "null" { Null }
| "photon" { Photon }
| "pid" { Pid }
| "pol" { Pol }
| "positron" { Positron }

```



```

| "power" { Power }
| "resonance" { Resonance }
| "roots" { Roots }
| "scale" { Scale }
| "smooth" { Smooth }
| "triangle" { Triangle }
| "unpol" { Unpol }
| "width" { Width }
| eof { END }

```

Module Parser (Yacc)

Header

```

open Syntax
module Maps = Diffmaps.Default
let parse_error msg =
  raise (Syntax_Error (msg, symbol_start (), symbol_end ()))

```

Token declarations

```

%token < int > INT
%token < float > FLOAT
%token < string > STRING
%token SLASH EQUALS STAR PLUS MINUS
%token LBRACKET LPAREN LANGLE COMMA RBRACKET RPAREN RANGLE
%token LBRACE RBRACE
%token Ascii Binary
%token Beta Eta
%token Bins Scale
%token Center
%token Columns
%token Comment
%token Design
%token Electron Positron Photon Muon Antimuon

```

```

%token Events Histogram File
%token Fix
%token Free
%token Id
%token Iterations
%token Lumi Roots
%token Map
%token Min Max
%token Notriangle
%token Null
%token Pid
%token Pol Unpol
%token Power Resonance
%token Smooth
%token Triangle
%token Width
%token END

%start main
%type < Syntax.file_cmds list > main

```

Grammar rules

```

main ::=
    files END { $1 }

```

```

files ::=
    { [] }
    | file files { $1 :: $2 }

```

```

file ::=
    | LBRACE file_cmds RBRACE { $2 }

```

```

file_cmds ::=
    { [] }
    | file_cmd file_cmds { $1 :: $2 }

```

```

file_cmd ::=
  File EQUALS STRING { Syntax.File $3 }
  | LBRACE design_cmds RBRACE { Syntax.Designs $2 }

design_cmds ::=
  { [] }
  | design_cmd design_cmds { $1 :: $2 }

design_cmd ::=
  Bins coord EQUALS INT { Syntax.Design_Bins ($4, $2) }
  | Scale coord EQUALS float { Syntax.Design_Scale ($4, $2) }
  | Design EQUALS STRING { Syntax.Design $3 }
  | Roots EQUALS float { Syntax.Roots $3 }
  | LBRACE channel_cmds RBRACE { Syntax.Channels $2 }
  | Comment EQUALS STRING { Syntax.Comment $3 }

channel_cmds ::=
  { [] }
  | channel_cmd channel_cmds { $1 :: $2 }

channel_cmd ::=
  Pid coord EQUALS particle { Syntax.Pid ($4, $2) }
  | Pol coord EQUALS polarization { Syntax.Pol ($4, $2) }
  | Fix coord EQUALS side { Syntax.Fix (true, $2, $4) }
  | Free coord EQUALS side { Syntax.Fix (false, $2, $4) }
  | Bins coord EQUALS INT { Syntax.Bins ($4, $2) }
  | Scale coord EQUALS float { Syntax.Scale ($4, $2) }
  | Min coord EQUALS float { Syntax.Xmin ($4, $2) }
  | Max coord EQUALS float { Syntax.Xmax ($4, $2) }
  | Map coord EQUALS map { Syntax.Diffmap ($4, $2) }
  | Lumi EQUALS float { Syntax.Lumi $3 }
  | Columns EQUALS INT { Syntax.Columns $3 }
  | Iterations EQUALS INT { Syntax.Iterations $3 }
  | Events EQUALS STRING { Syntax.Events $3 }
  | Histogram EQUALS STRING { Syntax.Histogram $3 }
  | Binary { Syntax.Binary true }
  | Ascii { Syntax.Binary false }
  | Smooth EQUALS float area { Syntax.Smooth ($3, $4) }
  | Triangle { Syntax.Triangle true }

```

$$| \text{Nottriangle} \{ \text{Syntax.Triangle false} \}$$
$$particle ::=$$
$$\begin{array}{l} INT \{ \$1 \} \\ | Electron \{ 11 \} \\ | Positron \{ -11 \} \\ | Muon \{ 13 \} \\ | Antimuon \{ -13 \} \\ | Photon \{ 22 \} \end{array}$$

polarization ::=

$$\begin{array}{l} INT \{ \$1 \} \\ | Unpol \{ 0 \} \end{array}$$
$$coord ::=$$

```

{ Syntax.X12 }
| SLASH STAR { Syntax.X12 }
| SLASH INT {
    match $2 with
    | 1 → Syntax.X1
    | 2 → Syntax.X2
    | n →
        Printf.eprintf "circe2: ignoring dimension %d (not 1, 2, or *)\n" n;
        Syntax.X12 }

```

$$side ::=$$
$$\begin{array}{l} Min \{ \textit{Syntax.Min} \} \\ | Max \{ \textit{Syntax.Max} \} \\ | STAR \{ \textit{Syntax.Minmax} \} \end{array}$$
$$map ::=$$
$$\begin{array}{l} Id \text{ LBRACE } id \text{ RBRACE } \{ \$3 \} \\ | Null \text{ LBRACE } null \text{ RBRACE } \{ \$3 \} \\ | Power \text{ LBRACE } power \text{ RBRACE } \{ \$3 \} \\ | Resonance \text{ LBRACE } resonance \text{ RBRACE } \{ \$3 \} \end{array}$$

```

area ::=
  interval interval { Syntax.Rect ($1, $2) }
| interval point { Syntax.Slice1 ($1, $2) }
| point interval { Syntax.Slice2 ($1, $2) }

point ::=
| LBRACKET float RBRACKET { Syntax.Delta $2 }
| LANGLE INT RANGLE { Syntax.Box $2 }

id ::=
  INT real_interval {
    let x_min, x_max = $2 in
    ($1, Maps.id x_min x_max) }

null ::=
  INT real_interval {
    let x_min, x_max = $2 in
    ($1, Maps.null x_min x_max) }

real_interval ::=
  left float COMMA float right { ($2, $4) }

left ::=
  LBRACKET { }
| LPAREN { }

right ::=
  RBRACKET { }
| RPAREN { }

interval ::=
  lower COMMA upper { ($1, $3) }

lower ::=
  LBRACKET float { Syntax.Closed $2 }
| LPAREN float { Syntax.Open $2 }
| LANGLE INT { Syntax.Bin $2 }

```

```

upper ::=
  float RBRACKET { Syntax.Closed $1 }
| float RPAREN { Syntax.Open $1 }
| INT RANGLE { Syntax.Bin $1 }

power ::=
  INT real_interval power_params {
    let x_min, x_max = $2
    and beta, eta = $3 in
    if beta ≤ -1.0 then begin
      Printf.eprintf "circe2: ignoring invalid beta: %g ≤ -1\n" beta;
      flush stderr;
      ($1, Maps.id x_min x_max)
    end else
      let alpha = 1.0 /. (1.0 +. beta) in
      ($1, Maps.power ~alpha ~eta x_min x_max) }

power_params ::=
  beta eta { ($1, $2) }
| eta beta { ($2, $1) }

beta ::=
  Beta EQUALS float { $3 }

eta ::=
  Eta EQUALS float { $3 }

resonance ::=
  INT real_interval resonance_params {
    let x_min, x_max = $2
    and eta, a = $3 in
    ($1, Maps.resonance ~eta ~a x_min x_max) }

resonance_params ::=
  center width { ($1, $2) }
| width center { ($2, $1) }

```

```
center ::=
    Center EQUALS float { $3 }
```

```
width ::=
    Width EQUALS float { $3 }
```

```
float ::=
    float_or_int { $1 }
    | float_or_int PLUS { $1 +. Syntax.epsilon }
    | float_or_int MINUS { $1 -. Syntax.epsilon }
```

```
float_or_int ::=
    INT { float $1 }
    | FLOAT { $1 }
```

B.27 Interface of *Commands*

An example for a command file:

```
{ file = "tesla.circe"
  { design = "TESLA" roots = 500
    { pid/1 = electron pid/2 = positron
      events = "tesla_500.electron_positron" }
    { pid = photon
      events = "tesla_500.gamma_gamma" }
    { pid/1 = photon pid/2 = positron
      events = "tesla_500.gamma_positron" }
    { pid/1 = electron pid/2 = photon
      events = "tesla_500.electron_gamma" } }
  { design = "TESLA" roots = 800
    { pid/1 = electron pid/2 = positron
      events = "tesla_800.electron_positron" } }
  { design = "TESLA" roots = 500
    { pid = photon
      events = "tesla_gg_500.gamma_gamma" } }
  { design = "TESLA" roots = 500
    { pid = electron
      events = "tesla_ee_500.electron_electron" } } }
```

```

exception Invalid_interval of float × float

type t
val parse_file : string → t
val parse_string : string → t
val execute : t → unit

```

B.28 Implementation of Commands

```

exception Invalid_interval of float × float

type t = Syntax.t

open Printf

module Maps = Diffmaps.Default
module Div = Division.Make_Poly (Maps)
module Grid = Grid.Make (Div)

```

B.28.1 Processing

```

let smooth_grid channel grid =
  List.fold_left
    (fun acc (width, area) → Grid.smooth width area acc)
    grid channel.Syntax.smooth

let report msg =
  prerr_string msg;
  flush stderr

let process_channel ch =
  report ("reading:␣" ^ ch.Syntax.events ^ "␣...");
  let data =
    if ch.Syntax.binary then
      Events.of_binary_file ch.Syntax.columns ch.Syntax.events
    else
      Events.of_ascii_file ch.Syntax.columns ch.Syntax.events in
  report "␣done.\n";
  begin match ch.Syntax.scale1, ch.Syntax.scale2 with
  | None, None → ()
  | Some scale1, None → Events.rescale scale1 1.0 data
  | None, Some scale2 → Events.rescale 1.0 scale2 data
  | Some scale1, Some scale2 → Events.rescale scale1 scale2 data

```



```

end;
let initial_grid =
  Grid.create ~triangle : ch.Syntax.triangle
    (Div.create ch.Syntax.intervals1 ch.Syntax.bins1
      ch.Syntax.x1_min ch.Syntax.x1_max)
    (Div.create ch.Syntax.intervals2 ch.Syntax.bins2
      ch.Syntax.x2_min ch.Syntax.x2_max) in
let grid =
  Grid.of_bigarray ~verbose :true
    ~iterations : ch.Syntax.iterations
    ~fixed_x1_min : ch.Syntax.fixed_x1_min
    ~fixed_x1_max : ch.Syntax.fixed_x1_max
    ~fixed_x2_min : ch.Syntax.fixed_x2_min
    ~fixed_x2_max : ch.Syntax.fixed_x2_max
    ~areas : (List.map snd ch.Syntax.smooth)
    data initial_grid in
let smoothed_grid = smooth_grid ch grid in
begin match ch.Syntax.histogram with
| Some name →
  let oc = open_out name in
  Grid.to_channel_2d oc smoothed_grid;

```

B.29 Interface of *Histogram*

```

type t
val create : int → float → float → t
val record : t → float → float → unit
val normalize : t → t
val to_channel : out_channel → t → unit
val to_file : string → t → unit
val as_bins_to_channel : out_channel → t → unit
val as_bins_to_file : string → t → unit
val regression : t → (float → bool) →
  (float → float) → (float → float) → float × float

```

B.30 Implementation of *Histogram*

```

open Printf

```

```

type t =
  { n_bins : int;
    n_bins_float : float;
    x_min : float;
    x_max : float;
    x_min_eps : float;
    x_max_eps : float;
    mutable n_underflow : int;
    mutable underflow : float;
    mutable underflow2 : float;
    mutable n_overflow : int;
    mutable overflow : float;
    mutable overflow2 : float;
    n : int array;
    w : float array;
    w2 : float array }

let create n_bins x_min x_max =
  let eps = 100. *. Float.Double.epsilon *. abs_float (x_max -. x_min) in
  { n_bins = n_bins;
    n_bins_float = float n_bins;
    x_min = x_min;
    x_max = x_max;
    x_min_eps = x_min -. eps;
    x_max_eps = x_max +. eps;
    n_underflow = 0;
    underflow = 0.0;
    underflow2 = 0.0;
    n_overflow = 0;
    overflow = 0.0;
    overflow2 = 0.0;
    n = Array.make n_bins 0;
    w = Array.make n_bins 0.0;
    w2 = Array.make n_bins 0.0 }

let record h x f =
  let i =
    truncate
      (floor (h.n_bins_float *. (x -. h.x_min) /. (h.x_max -. h.x_min))) in
  let i =
    if i < 0 ∧ x > h.x_min_eps then
      0

```

```

    else if  $i \geq h.n\_bins - 1 \wedge x < h.x\_max\_eps$  then
       $h.n\_bins - 1$ 
    else
       $i$  in
    if  $i < 0$  then begin
       $h.n\_underflow \leftarrow h.n\_underflow + 1$ ;
       $h.underflow \leftarrow h.underflow + .f$ ;
       $h.underflow2 \leftarrow h.underflow2 + .f * .f$ 
    end else if  $i \geq h.n\_bins$  then begin
       $h.n\_overflow \leftarrow h.n\_overflow + 1$ ;
       $h.overflow \leftarrow h.overflow + .f$ ;
       $h.overflow2 \leftarrow h.overflow2 + .f * .f$ 
    end else begin
       $h.n.(i) \leftarrow h.n.(i) + 1$ ;
       $h.w.(i) \leftarrow h.w.(i) + .f$ ;
       $h.w2.(i) \leftarrow h.w2.(i) + .f * .f$ 
    end
  end

let normalize  $h =$ 
  let  $sum\_w = Array.fold\_left (+.) (h.underflow + . h.overflow) h.w$  in
  let  $sum\_w2 = sum\_w * . sum\_w$  in
  {  $n\_bins = h.n\_bins$ ;
     $n\_bins\_float = h.n\_bins\_float$ ;
     $x\_min = h.x\_min$ ;
     $x\_max = h.x\_max$ ;
     $x\_min\_eps = h.x\_min\_eps$ ;
     $x\_max\_eps = h.x\_max\_eps$ ;
     $n\_underflow = h.n\_underflow$ ;
     $underflow = h.underflow /. sum\_w$ ;
     $underflow2 = h.underflow2 /. sum\_w2$ ;
     $n\_overflow = h.n\_overflow$ ;
     $overflow = h.overflow /. sum\_w$ ;
     $overflow2 = h.overflow2 /. sum\_w2$ ;
     $n = Array.copy h.n$ ;
     $w = Array.map (\text{fun } w' \rightarrow w' /. sum\_w) h.w$ ;
     $w2 = Array.map (\text{fun } w2' \rightarrow w2' /. sum\_w2) h.w2$  }

let to_channel oc  $h =$ 
  for  $i = 0$  to  $h.n\_bins - 1$  do
    let  $x\_mid = h.x\_min$ 
       $+ . (h.x\_max - . h.x\_min) * . (float i + . 0.5) /. h.n\_bins\_float$  in
    if  $h.n.(i) > 1$  then

```

```

    let  $n = \text{float } h.n.(i)$  in
    (* let  $var1 = (h.w2.(i) /. n - . (h.w.(i) /. n) ** 2.0) /. (n - . 1.0)$ 
*)
    let  $var2 = h.w.(i) ** 2.0 /. (n * . (n - . 1.0))$  in
    let  $var = var2$  in
    fprintf oc "%%.17E%.17E%.17E\n"  $x\_mid$   $h.w.(i)$  ( $\text{sqrt } var$ )
  else if  $h.n.(i) = 1$  then
    fprintf oc "%%.17E%.17E%.17E\n"  $x\_mid$   $h.w.(i)$   $h.w.(i)$ 
  else
    fprintf oc "%%.17E%.17E\n"  $x\_mid$   $h.w.(i)$ 
done

let  $as\_bins\_to\_channel$  oc  $h =$ 
  for  $i = 0$  to  $h.n\_bins - 1$  do
    let  $x\_min = h.x\_min$ 
      +. ( $h.x\_max - . h.x\_min$ ) * . ( $\text{float } i$ ) /.  $h.n\_bins\_float$ 
    and  $x\_max = h.x\_min$ 
      +. ( $h.x\_max - . h.x\_min$ ) * . ( $\text{float } i + . 1.0$ ) /.  $h.n\_bins\_float$  in
    fprintf oc "%%.17e%.17e\n"  $x\_min$   $h.w.(i)$ ;
    fprintf oc "%%.17e%.17e\n"  $x\_max$   $h.w.(i)$ 
  done

let  $to\_file$  name  $h =$ 
  let oc =  $open\_out$  name in
   $to\_channel$  oc  $h$ ;
   $close\_out$  oc

let  $as\_bins\_to\_file$  name  $h =$ 
  let oc =  $open\_out$  name in
   $as\_bins\_to\_channel$  oc  $h$ ;
   $close\_out$  oc

```

B.31 Naive Linear Regression

```

type  $regression\_moments =$ 
  { mutable  $n : int$ ;
    mutable  $x : float$ ;
    mutable  $y : float$ ;
    mutable  $xx : float$ ;
    mutable  $xy : float$  }

```

```

let init_regression_moments =
  { n = 0;
    x = 0.0;
    y = 0.0;
    xx = 0.0;
    xy = 0.0 }

```

```

let record_regression m x y =
  m.n ← m.n + 1;
  m.x ← m.x + . x;
  m.y ← m.y + . y;
  m.xx ← m.xx + . x * . x;
  m.xy ← m.xy + . x * . y

```

Minimize

$$f(a, b) = \sum_i w_i (ax_i + b - y_i)^2 = \langle (ax + b - y)^2 \rangle \quad (100)$$

i. e.

$$\frac{1}{2} \frac{\partial f}{\partial a}(a, b) = \langle x(ax + b - y) \rangle = a\langle x^2 \rangle + b\langle x \rangle - \langle xy \rangle = 0 \quad (101a)$$

$$\frac{1}{2} \frac{\partial f}{\partial b}(a, b) = \langle ax + b - y \rangle = a\langle x \rangle + b - \langle y \rangle = 0 \quad (101b)$$

and

$$a = \frac{\langle xy \rangle - \langle x \rangle \langle y \rangle}{\langle x^2 \rangle - \langle x \rangle^2} \quad (102a)$$

$$b = \langle y \rangle - a\langle x \rangle \quad (102b)$$

```

let linear_regression m =
  let n = float m.n in
  let x = m.x /. n
  and y = m.y /. n
  and xx = m.xx /. n
  and xy = m.xy /. n in
  let a = (xy - . x * . y) /. (xx - . x * . x) in
  let b = y - . a * . x in
  (a, b)

```

```

let regression h chi fx fy =
  let m = init_regression_moments in
  for i = 0 to h.n_bins - 1 do
    let x_mid = h.x_min
      +. (h.x_max - . h.x_min) *. (float i + . 0.5) /. h.n_bins_float in
    if chi x_mid then
      record_regression m (fx x_mid) (fy h.w.(i))
  done;
  linear_regression m

```

B.32 Implementation of *Circe2_tool*

B.32.1 Large Numeric File I/O

```

type input_file =
  | ASCII_ic of in_channel
  | ASCII_inf of string
  | Binary_inf of string

type output_file =
  | ASCII_oc of out_channel
  | ASCII_outf of string
  | Binary_outf of string

let read_columns = function
  | ASCII_ic ic → Events.of_ascii_channel columns ic
  | ASCII_inf inf → Events.of_ascii_file columns inf
  | Binary_inf inf → Events.of_binary_file columns inf

let write_output array =
  match output with
  | ASCII_oc oc → Events.to_ascii_channel oc array
  | ASCII_outf outf → Events.to_ascii_file outf array
  | Binary_outf outf → Events.to_binary_file outf array

```

The special case of writing a binary file with mapped I/O can be treated most efficiently:

```

let cat_columns input output =
  match input, output with
  | ASCII_ic ic, Binary_outf outf →
    ignore (Events.of_ascii_channel ~file : outf columns ic)
  | -, - → write_output (read_columns input)

```

```

let map_xy fx fy columns input output =
  let a = read columns input in
  for i2 = 1 to Bigarray.Array2.dim2 a do
    Bigarray.Array2.set a 1 i2 (fx (Bigarray.Array2.get a 1 i2));
    Bigarray.Array2.set a 2 i2 (fy (Bigarray.Array2.get a 2 i2))
  done;
  write output a

let log10_xy = map_xy log10 log10
let exp10_xy = map_xy (fun x → 10.0 ** x) (fun y → 10.0 ** y)

```

B.32.2 Histogramming

```

let scan_string s =
  let tokens = Lexing.from_string s in
  let t1 = Events.next_float tokens in
  let t2 = Events.next_float tokens in
  let t3 = Events.next_float tokens in
  (t1, t2, t3)

let histogram_ascii name histograms =
  let ic = open_in name
  and histos =
    List.map (fun (tag, f, n, x_min, x_max) →
      (tag, f, Histogram.create n x_min x_max)) histograms in
  begin try
    while true do
      let x, y, w = scan_string (input_line ic) in
      List.iter (fun (_, f, h) → Histogram.record h (f x y) w) histos
    done
  with
  | End_of_file → ()
  end;
  close_in ic;
  List.map (fun (t, _, h) → (t, h)) histos

let histogram_binary_channel ic histograms =
  let histos =
    List.map (fun (tag, f, n, x_min, x_max) →
      (tag, f, Histogram.create n x_min x_max)) histograms in
  begin try

```

```

while true do
  let  $x = \text{Float.Double.input\_binary\_float } ic$ 
  and  $y = \text{Float.Double.input\_binary\_float } ic$ 
  and  $w = \text{Float.Double.input\_binary\_float } ic$  in
   $\text{List.iter } (\text{fun } (-, f, h) \rightarrow \text{Histogram.record } h (f \ x \ y) \ w) \ \text{histos}$ 
done
with
|  $\text{End\_of\_file} \rightarrow ()$ 
end;
 $\text{List.map } (\text{fun } (t, -, h) \rightarrow (t, h)) \ \text{histos}$ 

let  $\text{histogram\_binary name histograms} =$ 
  let  $a = \text{Events.of\_binary\_file } 3 \ \text{name}$ 
  and  $\text{histos} =$ 
     $\text{List.map } (\text{fun } (tag, f, n, x\_min, x\_max) \rightarrow$ 
       $(tag, f, \text{Histogram.create } n \ x\_min \ x\_max)) \ \text{histograms in}$ 
  for  $i2 = 1$  to  $\text{Bigarray.Array2.dim2 } a$  do
    let  $x = \text{Bigarray.Array2.get } a \ 1 \ i2$ 
    and  $y = \text{Bigarray.Array2.get } a \ 2 \ i2$ 
    and  $w = \text{Bigarray.Array2.get } a \ 3 \ i2$  in
     $\text{List.iter } (\text{fun } (-, f, h) \rightarrow \text{Histogram.record } h (f \ x \ y) \ w) \ \text{histos}$ 
  done;
   $\text{List.map } (\text{fun } (t, -, h) \rightarrow (t, h)) \ \text{histos}$ 

let  $\text{histogram\_data to\_file } n \ \text{reader suffix} =$ 
  let  $\text{histograms} = \text{reader}$ 
  [ (" $x$ ",  $(\text{fun } x \ y \rightarrow x), n, 0.0, 1.0$ );
    (" $x\_low$ ",  $(\text{fun } x \ y \rightarrow x), n, 0.0, 1.0 \cdot 10^{-4}$ );
    (" $1-x\_low$ ",  $(\text{fun } x \ y \rightarrow 1.0 - .x), n, 0.0, 1.0 \cdot 10^{-2}$ );
    (" $1-x\_low2$ ",  $(\text{fun } x \ y \rightarrow 1.0 - .x), n, 1.0 \cdot 10^{-10}, 1.0 \cdot 10^{-2}$ );
    (" $y$ ",  $(\text{fun } x \ y \rightarrow y), n, 0.0, 1.0$ );
    (" $y\_low$ ",  $(\text{fun } x \ y \rightarrow y), n, 0.0, 1.0 \cdot 10^{-4}$ );
    (" $1-y\_low$ ",  $(\text{fun } x \ y \rightarrow 1.0 - .y), n, 0.0, 1.0 \cdot 10^{-2}$ );
    (" $1-y\_low2$ ",  $(\text{fun } x \ y \rightarrow 1.0 - .y), n, 1.0 \cdot 10^{-10}, 1.0 \cdot 10^{-2}$ );
    (" $xy$ ",  $(\text{fun } x \ y \rightarrow x * .y), n, 0.0, 1.0$ );
    (" $xy\_low$ ",  $(\text{fun } x \ y \rightarrow x * .y), n, 0.0, 1.0 \cdot 10^{-8}$ );
    (" $z$ ",  $(\text{fun } x \ y \rightarrow \text{sqrt } (x * .y)), n, 0.0, 1.0$ );
    (" $z\_low$ ",  $(\text{fun } x \ y \rightarrow \text{sqrt } (x * .y)), n, 0.0, 1.0 \cdot 10^{-4}$ );
    (" $x-y$ ",  $(\text{fun } x \ y \rightarrow x - .y), n, -1.0, 1.0$ );
    (" $x\_fine$ ",  $(\text{fun } x \ y \rightarrow x), n, 0.75, 0.85$ );
    (" $y\_fine$ ",  $(\text{fun } x \ y \rightarrow y), n, 0.75, 0.85$ );
    (" $xy\_fine$ ",  $(\text{fun } x \ y \rightarrow x * .y), n, 0.5, 0.7$ );

```



```

        ("x-y_fine", (fun x y → x - . y), n, - 0.1, 0.1) ] in
List.iter (fun (tag, h) →
  to_file (tag ^ suffix) (Histogram.normalize h))
histograms

```

B.32.3 Moments

```

let moments_ascii name moments =
  let ic = open_in name
  and f = Array.of_list (List.map (fun (tag, f) → f) moments)
  and m = Array.of_list (List.map (fun (tag, f) → 0.0) moments)
  and sum_w = ref 0.0 in
  begin try
    while true do
      let x, y, w = scan_string (input_line ic) in
        sum_w := !sum_w + . w;
        for i = 0 to Array.length f - 1 do
          m.(i) ← m.(i) + . w * . (f.(i) x y)
        done
      done
    with
    | End_of_file → ()
  end;
  close_in ic;
  List.map2 (fun (tag, f) m → (tag, m /. !sum_w)) moments (Array.to_list m)

let moments_binary name moments =
  let a = Events.of_binary_file 3 name in
  let f = Array.of_list (List.map (fun (tag, f) → f) moments)
  and m = Array.of_list (List.map (fun (tag, f) → 0.0) moments)
  and sum_w = ref 0.0 in
  for i2 = 1 to Bigarray.Array2.dim2 a do
    let x = Bigarray.Array2.get a 1 i2
    and y = Bigarray.Array2.get a 2 i2
    and w = Bigarray.Array2.get a 3 i2 in
    sum_w := !sum_w + . w;
    for i = 0 to Array.length f - 1 do
      m.(i) ← m.(i) + . w * . (f.(i) x y)
    done
  done;
done;

```

```

List.map2 (fun (tag, f) m → (tag, m /. !sum_w)) moments (Array.to_list m)

let fmt var = function
| 0 → ""
| 1 → var
| n → var ^ "^" ^ string_of_int n

let moment nx ny =
  (fmt "x" nx ^ fmt "y" ny, (fun x y → x ** (float nx) *. y ** (float ny)))

let diff_moment n =
  (fmt "|x-y|" n, (fun x y → (abs_float (x - . y)) ** (float n)))

let moments_data reader =
  let moments = reader
    (List.map (moment 0) [1; 2; 3; 4; 5; 6] @
     List.map (moment 1) [0; 1; 2; 3; 4; 5] @
     List.map (moment 2) [0; 1; 2; 3; 4] @
     List.map (moment 3) [0; 1; 2; 3] @
     List.map (moment 4) [0; 1; 2] @
     List.map (moment 5) [0; 1] @
     List.map (moment 6) [0] @
     List.map diff_moment [1; 2; 3; 4; 5; 6]) in
  List.iter (fun (tag, m) → Printf.printf "%s=%g\n" tag m) moments

```

B.32.4 Regression

```

let regression_interval (tag, h) (log_min, log_max) =
  let a, b =
    Histogram.regression h
    (fun x → x ≥ log_min ∧ x ≤ log_max) (fun x → x) (fun x →
log x) in
  Printf.printf "%g<%s<%g: a=%g, b=%g\n" log_min tag log_max a b

let intervals =
  [ (-7.0, -6.0);
    (-6.0, -5.0);
    (-5.0, -4.0);
    (-4.0, -3.0);
    (-3.0, -2.0);
    (-7.0, -5.0);
    (-6.0, -4.0);

```

```

      (-5.0, - 3.0);
      (-4.0, - 2.0);
      (-7.0, - 4.0);
      (-6.0, - 3.0);
      (-5.0, - 2.0);
      (-7.0, - 3.0);
      (-6.0, - 2.0) ]

let intervals =
  [ (-7.0, - 4.0);
    (-6.0, - 3.0);
    (-7.0, - 3.0);
    (-6.0, - 2.0) ]

let regression_data n reader =
  let histograms = reader
    [ ("log(x1)", (fun x1 x2 → log x1), n, - 8.0, 0.0);
      ("log(x2)", (fun x1 x2 → log x2), n, - 8.0, 0.0) ] in
  List.iter (fun (tag, h) →
    List.iter (regression_interval (tag, h)) intervals) histograms

```

B.32.5 Visually Adapting Powermaps

```

let power_map beta eta =
  Diffmap.Power.create ~alpha : (1.0 /. (1.0 + . beta)) ~eta 0.0 1.0

let power_data to_file n center resolution reader suffix =
  let histograms = reader
    (List.flatten
      (List.map (fun p →
        let pm = power_map p 0.0 in
        let ihp = Diffmap.Power.ihp pm in
        [((Printf.sprintf "1-x_low%.2f" p), (fun x1 x2 → ihp (1.0 -
          .x1))), n, 0.0, ihp 1.0 · 10-4);
          ((Printf.sprintf "1-y_low%.2f" p), (fun x1 x2 → ihp (1.0 -
          .x2))), n, 0.0, ihp 1.0 · 10-4);
          ((Printf.sprintf "x_low%.2f" p), (fun x1 x2 → ihp x1), n, 0.0, ihp 1.0 ·
          10-4);
          ((Printf.sprintf "y_low%.2f" p), (fun x1 x2 → ihp x2), n, 0.0, ihp 1.0 ·
          10-4))])
    [center - . 2.0 * . resolution;

```

```

        center - . resolution; center; center + . resolution;
        center + . 2.0 * . resolution])) in
List.iter (fun (tag, h) →
  to_file (tag ^ suffix) (Histogram.normalize h)) histograms

```

B.32.6 Testing

```

let make_test_data n (x_min, x_max) (y_min, y_max) f =
  let delta_x = x_max - . x_min
  and delta_y = y_max - . y_min in
  let array =
    Bigarray.Array2.create Bigarray.float64 Bigarray.fortran_layout 3 n in
  for i = 1 to n do
    let x = x_min + . Random.float delta_x
    and y = y_min + . Random.float delta_y in
    Bigarray.Array2.set array 1 i x;
    Bigarray.Array2.set array 2 i y;
    Bigarray.Array2.set array 3 i (f x y)
  done;
  array

module Div = Division.Mono
module Grid = Grid.Make (Div)

let test_design grid =
  let channel =
    { Grid.pid1 = 22; Grid.pol1 = 0;
      Grid.pid2 = 22; Grid.pol2 = 0;
      Grid.lumi = 0.0; Grid.g = grid } in
  { Grid.name = "TEST";
    Grid.roots = 500.0;
    Grid.channels = [ channel ];
    Grid.comments = [ "unphysical_test" ]}

let test verbose triangle shrink nbins name f =
  let data = make_test_data 100000 (0.4, 0.9) (0.2, 0.7) f in
  let initial_grid =
    Grid.create ~triangle
      (Div.create nbins 0.0 1.0)
      (Div.create nbins 0.0 1.0) in
  let grid =

```

```

    Grid.of_bigarray ~verbose
    ~fixed_x1_min : (¬ shrink) ~fixed_x1_max : (¬ shrink)
    ~fixed_x2_min : (¬ shrink) ~fixed_x2_max : (¬ shrink)
    data initial_grid in
    Grid.designs_to_file name [test_design grid]
let random_interval () =
  let x1 = Random.float 1.0
  and x2 = Random.float 1.0 in
  (min x1 x2, max x1 x2)
module Test_Power = Diffmap.Make_Test (Diffmap.Power)
module Test_Resonance = Diffmap.Make_Test (Diffmap.Resonance)
let test_maps seed =
  Random.init seed;
  let x_min, x_max = random_interval ()
  and y_min, y_max = random_interval () in
  let alpha = 1.0 +. Random.float 4.0
  and eta =
    if Random.float 1.0 > 0.5 then
      y_max +. Random.float 5.0
    else
      y_min -. Random.float 5.0 in
  Test_Power.all
    (Diffmap.Power.create ~alpha ~eta ~x_min ~x_max y_min y_max);
  let a = Random.float 1.0
  and eta = y_min +. Random.float (y_max -. y_min) in
  Test_Resonance.all
    (Diffmap.Resonance.create ~eta ~a ~x_min ~x_max y_min y_max)

```

B.32.7 Main Program

```

type format = ASCII | Binary
type action =
  | Nothing
  | Command_file of string
  | Commands of string
  | Cat
  | Histo of format × string
  | Moments of format × string

```

```

| Regression of format × string
| Test of string × (float → float → float)
| Test_Diffmaps of int
| Unit_Tests
| Log10
| Exp10
| Power of format × string

let rec passed = function
| [] → true
| (OUnit.RFailure _ | OUnit.RError _ | OUnit.RTodo _) :: _ → false
| (OUnit.RSuccess _ | OUnit.RSkip _) :: tail → passed tail

let _ =
let usage = "usage:_" ^ Sys.argv.(0) ^ "_[options]" in
let nbins = ref 100
and triangle = ref false
and shrink = ref false
and verbose = ref false
and action = ref Nothing
and suffix = ref ".histo"
and input = ref (ASCII_ic stdin)
and output = ref (ASCII_oc stdout)
and columns = ref 3
and histogram_to_file = ref Histogram.to_file
and center = ref 0.0
and resolution = ref 0.01 in
Arg.parse
  (Arg.align
    [("-c", Arg.String (fun s → action := Commands s),
      "string_commands_to_execute");
     ("-f", Arg.String (fun f → action := Command_file f),
      "name_command_file_to_read");
     ("-ia", Arg.String (fun n → input := ASCII_inf n),
      "name_ASCII_input_file");
     ("-ib", Arg.String (fun n → input := Binary_inf n),
      "name_Binary_input_file");
     ("-oa", Arg.String (fun n → output := ASCII_outf n),
      "name_ASCII_output_file");
     ("-ob", Arg.String (fun n → output := Binary_outf n),
      "name_Binary_output_file");
     ("-cat", Arg.Unit (fun () →

```

```

        input := ASCII_ic stdin; output := ASCII_oc stdout;
        action := Cat),
    "_copy_stdin_to_stdout");
("-log10", Arg.Unit (fun () →
    input := ASCII_ic stdin; output := ASCII_oc stdout;
    action := Log10),
    "_apply_log10_to_all_histogram_projections");
("-exp10", Arg.Unit (fun () →
    input := ASCII_ic stdin; output := ASCII_oc stdout;
    action := Exp10),
    "_apply_10**_to_all_histogram_projections");
("-ha", Arg.String (fun s → action := Histo (ASCII, s)),
    "name_histogramming_tests_of_ASCII_file");
("-hb", Arg.String (fun s → action := Histo (Binary, s)),
    "name_histogramming_tests_of_binary_file");
("-ma", Arg.String (fun s → action := Moments (ASCII, s)),
    "name_moments_tests_of_ASCII_file");
("-mb", Arg.String (fun s → action := Moments (Binary, s)),
    "name_moments_tests_of_binary_file");
("-pa", Arg.String (fun s → action := Power (ASCII, s)),
    "name_apply_powers_to_ASCII_file");
("-pb", Arg.String (fun s → action := Power (Binary, s)),
    "name_apply_powers_to_binary_file");
("-C", Arg.Float (fun c → center := c),
    Printf.sprintf "center_parameter_of_power_map_(default=%f)" !center);
("-R", Arg.Float (fun r → resolution := r),
    Printf.sprintf "resolution_parameter_of_power_map_(default=%f)" !resolution);
("-Pa", Arg.String (fun s → action := Regression (ASCII, s)),
    "name_apply_simple_regression_to_ASCII_file");
("-Pb", Arg.String (fun s → action := Regression (Binary, s)),
    "name_apply_simple_regression_to_binary_file");
("-p", Arg.String (fun s → suffix := s),
    "suffix_histogram_file_name_suffix");
("-h", Arg.Unit (fun () → histogram_to_file := Histogram.as_bins_to_file),
    "_write_endpoints_of_histogram_bins_instead_of_midpoints");
("-b", Arg.Int (fun n → nbins := n), "#_number_of_bins");
("-s", Arg.Set shrink, "_shrinkwrap_interval");
("-S", Arg.Clear shrink, "_don't_shrinkwrap_interval_[default]");
("-t", Arg.Set triangle,
    "_project_symmetrical_distribution_onto_triangle");
("-v", Arg.Set verbose, "_verbose");

```

```

        ("-test", Arg.Unit (fun () → action := Unit_Tests),
          "run_unit_test_suite");
        ("-test1", Arg.String (fun s → action := Test (s, fun x y →
1.0)),
          "testing");
        ("-test2", Arg.String (fun s → action := Test (s, fun x y →
x *. y)),
          "testing");
        ("-test3", Arg.String (fun s → action := Test (s, fun x y →
1.0 /. x + . 1.0 /. y)),
          "testing");
        ("-testm", Arg.Int (fun seed → action := Test_Diffmaps seed),
          "testing_maps" ])
    (fun names → prerr_endline usage; exit 2)
    usage;
begin try
  match !action with
  | Nothing → ()
  | Commands name → Commands.execute (Commands.parse_string name)
  | Command_file name → Commands.execute (Commands.parse_file name)
  | Histo (ASCII, name) →
      histogram_data !histogram_to_file !nbins
        (histogram_ascii name) !suffix
  | Histo (Binary, "-") →
      histogram_data !histogram_to_file !nbins
        (histogram_binary_channel stdin) !suffix
  | Histo (Binary, name) →
      histogram_data !histogram_to_file !nbins
        (histogram_binary name) !suffix
  | Moments (ASCII, name) → moments_data (moments_ascii name)
  | Moments (Binary, name) → moments_data (moments_binary name)
  | Power (ASCII, name) →
      power_data !histogram_to_file !nbins !center !resolution
        (histogram_ascii name) !suffix
  | Power (Binary, name) →
      power_data !histogram_to_file !nbins !center !resolution
        (histogram_binary name) !suffix
  | Regression (ASCII, name) → regression_data !nbins (histogram_ascii name)
  | Regression (Binary, name) → regression_data !nbins (histogram_binary name)
  | Cat → cat !columns !input !output
  | Log10 → log10_xy !columns !input !output

```



```

| Exp10 → exp10_xy !columns !input !output
| Test (name, f) → test !verbose !triangle !shrink !nbins name f
| Test_Diffmaps seed → test_maps seed
| Unit_Tests →
  let suite =
    OUnit(>:::) "A11"
    [ThoArray.suite;
     ThoMatrix.suite;
     Division.Test.suite;
     Filter.suite] in
  if passed (OUnit.run_test_tt ~verbose !verbose suite) then
    exit 0
  else
    exit 1

with
| Syntax.Syntax_Error (msg, _, _) →
  Printf.eprintf "%s:␣parse␣error:␣%s\n" Sys.argv.(0) msg;
  exit 1
end;
exit 0

```

Identifiers

generate_beta: 74d, 74e, 82c

Refinements

```

⟨(i1, i2) ← i 52a⟩
⟨ib ← i 52b⟩
⟨x ∈ [x(ib-1), x(ib)] 56d⟩
⟨y ← yy 62a⟩
⟨y ← (a(x - ξ))α/b + η 57a⟩
⟨circe2.f90 49c⟩
⟨circe2 declarations 50b⟩
⟨circe2 implementation 55a⟩
⟨circe2 parameters 55e⟩
⟨circe2_channel members 51b⟩
⟨circe2_division members 52d⟩
⟨circe2_generate.f90 70c⟩
⟨circe2_ls.f90 72d⟩

```

<circe2_moments.f90 78a>
 <circe2_moments_library declarations 74d>
 <circe2_moments_library implementation 74e>
 <circe2_state members 51a>
 <implicit none 49b>
 <sampling declarations 78b>
 <sampling implementation 78d>
 <tao_random_objects.f90 69c>
 <tao_random_objects declarations 69d>
 <tao_random_objects implementation 70a>
 <Apply Jacobian for triangle map 62b>
 <Calculate y 67a>
 <Check a and b 75a>
 <Check for ECRIC2 68d>
 <Check if design and fdesign do match 64>
 <Check polarization support 66c>
 <Complain and return iff $ic \leq 0$ 56b>
 <Copyleft notice 50a>
 <Decode polarization support 65c>
 <Do a binary search for $wgt(i-1) \leq u < wgt(i)$ 56c>
 <Do a binary search for $y(ib-1) \leq y < y(ib)$ 62c>
 <Error codes for circe2_load 63e>
 <Find ic for p and h 56a>
 <Find free logical unit for lun 69a>
 <Generate a trial x and calculate its weight w 76a>
 <Inverse triangle map 58a>
 <Load channel ch 66b>
 <Load divisions x 66e>
 <Load histograms 65a>
 <Load weights wgt and val 67b>
 <Local variables in circe2_load 66a>
 <Main program 90>
 <Module procedures for circe2_generate_program 72c>
 <Open name for reading on lun 67d>
 <Process command line arguments for circe2_generate_program 71a>
 <Select n according to the weight channels(n)%w 82d>
 <Separator 49d>
 <Set up generate_beta parameters 75b>
 <Set up best value for t 77c>
 <Skip comments until CIRCE2 68b>
 <Skip data until ECRIC2 68c>

⟨*Swap y(1) and y(2) in 50% of the cases* 58b⟩
⟨*Test support for density matrices* 63c⟩
⟨*The old ieee_is_normal kludge* 86⟩
⟨*Version* 49a⟩
⟨*Write channel data* 74c⟩
⟨*Write channel header* 74b⟩
⟨*Write design/beam data* 74a⟩

Index

--ocaml_lex_token_rec, ??, ??
--ocaml_lex_tables, ??, ??
y_min (label), 118, 117, 115,
 114, 113, 112, 111, 111,
 118, 116, 113, 111
y_min (field), 120, 116, 114, 112,
 111, 120, 118, 118, 116, 116,
 113, 113, 111, 111
y_min, 104, 120, 118, 116, 113,
 111, 108, 110, 109, 109
y_max (label), 118, 117, 115,
 114, 113, 112, 111, 111,
 118, 116, 113, 111
y_max (field), 120, 116, 114, 112,
 111, 120, 118, 118, 116, 116,
 113, 113, 111, 111
y_max, 104, 120, 118, 116, 113,
 111, 108, 110, 109, 109
yytransl_const, ??, ??
yytransl_block, ??, ??
yytablesize, ??, ??
yytables, ??, ??
yytable, ??, ??
yyindex, ??, ??
yyrindex, ??, ??
yynames_const, ??, ??
yynames_block, ??, ??
yylhs, ??, ??
yylen, ??, ??
yygindex, ??, ??
yydgoto, ??, ??
yydefred, ??, ??
yycheck, ??, ??
yyact, ??, ??
y (field), 172, 173, 172
x_min_eps (field), 169, 171, 170,
 170
x_min (label), 105, 122, 121,
 121, 121, 120, 118, 118,
 117, 116, 115, 114, 113,
 113, 112, 111, 111, 111,
 108
x_min (field), 169, 120, 116, 114,
 112, 111, 173, 172, 171, 171,
 170, 120, 118, 116, 113, 111
x_min, 104, 120, 118, 116, 113,
 111, 108, 110, 109, 109
x_max_eps (field), 169, 171, 170,
 170
x_max (label), 105, 122, 121,
 121, 121, 120, 118, 118,
 117, 116, 115, 114, 113,
 113, 112, 111, 111, 111,
 108
x_max (field), 169, 120, 116, 114,
 112, 111, 173, 172, 171, 171,
 170, 120, 118, 116, 113, 111
x_max, 104, 120, 118, 116, 113,
 111, 108, 110, 109, 109
xy (field), 172, 173, 173, 172
xx (field), 172, 173, 173, 172
Xmin, 155, 158, ??, 163
Xmax, 155, 158, ??, 163
xi (label), 117, 114
xi (field), 116, 114, 117, 114
x2_min (field), 154, 156, 168, 157
x2_max (field), 154, 156, 168, 157
X2, 155, 158, ??, 164, 168
x1_min (field), 154, 156, 168, 157
x1_max (field), 154, 156, 168, 157
X12, 155, 158, ??, 164
X1, 155, 158, ??, 164, 168
x (field), 172, 173, 172
write_file, 168, 168
write, 174, 174, 174

with_domain (field), **120**, 120
with_domain, **105**, **120**, **118**, **116**,
113, **111**, **108**
Width (camlyacc token), **161**, 167
Width, **??**, **??**, 159
width (camlyacc non-terminal),
167, 166
white (camllex regexpr), **??**, **159**,
??, 159
was_successful, **??**, **??**
w2 (field), **169**, 171, 170, 170
w (field), **169**, 173, 172, 171, 171,
170, 170
variance_area, **137**
variance, **138**
upper (camlyacc non-terminal),
166, 165
upper (camllex regexpr), **159**, 159
update_x_min, **168**, 168
update_x_max, **168**, 168
update_smooth, **168**, 168
update_scale, **168**, 168
update_pol, **168**, 168
update_pid, **168**, 168
update_map, **168**, 168
update_fix, **168**, 168
update_design_scale, **168**, 168
update_design_bins, **168**, 168
update_bins, **168**, 168
unreadable, **168**, 168
unquote, **??**, **159**, **??**, 159
Unpol (camlyacc token), **161**, 164
Unpol, **??**, **??**, 159
Unit_Tests, **181**, 182
unit, **100**
underflow2 (field), **169**, 171, 170,
170
underflow (field), **169**, 171, 170,
170
try_of_ascii_channel, **151**, 151
Triangle (camlyacc token), **161**,
163
Triangle, **??**, **155**, **158**, **??**, 163,
159
triangle (field), **154**, **156**, 168, 157
transpose, **99**
to_string, **92**, **93**, **92**, **??**, 117, 114,
94, 93, **??**
to_short_string, **94**
to_file, **169**, **172**, 182
to_channel_2d, **137**, 168
to_channel, **169**, **137**, **123**, **171**,
172
to_binary_file, **149**, **153**, 174
to_ascii_file, **149**, **153**, 174
to_ascii_channel, **149**, **152**, 174,
153
token (camllex parsing rule), **??**,
159
token (type), **??**, **??**
token, **??**, **??**, 159, 168, 150, 150
Todo (exn), **??**
todo, **??**
time_fun, **??**, **??**
ThoMatrix (module), **98**, **99**, 182
ThoArray (module), **95**, **96**, 182
test_result (type), **??**, **??**
Test_Resonance (module), **181**,
181
Test_Power (module), **181**, 181
test_maps, **181**, 182
test_fun (type), **??**, **??**
test_filter, **??**, **??**
test_event (type), **??**, **??**
Test_Diffmaps, **181**, 182
test_design, **180**, 180
test_decorate, **??**, **??**
test_case_paths, **??**, **??**
test_case_count, **??**, **??**
TestList, **??**, **??**
TestLabel, **??**, **??**

TestCase, ??, ??
Test (sig), **106, 108**, 106
Test (module), **124**, 182
Test, **181**, 182
test (type), ??, 124, 100, 99, 95, ??
test, **180**, 182
T (sig), **136, 122, 119, 104, 92**,
119, 108, 92, 138, 136, 124,
123, 119, 119, 105, 92, 119,
119, 108
t (type), **162, 161, 169, 168, 149**,
155, 136, 122, 100, 104,
92, ??, 169, 168, 168, 150,
158, 120, 116, 114, 112,
111, 108, 92, 92, ??, 169,
169, 168, 149, 149, 149, 149,
149, 155, 154, 138, 137, 137,
137, 137, 137, 137, 137, 136,
136, 136, 124, 123, 123, 123,
123, 123, 122, 122, 122, 100,
119, 119, 107, 107, 107, 106,
106, 106, 105, 105, 105, 105,
105, 105, 105, 104, 104, 92,
92, ??, 168, 150, 150, 158,
156, 120, 120, 119, 108, 108,
108, 108, 108, 108, 108, 92,
??
Syntax_Error (exn), **153, 156**
Syntax (module), **153, 156**, ??,
167, 166, 165, 165, 164, 164,
164, 163, 163, 162, 162, 161,
137, 137, 137, 168, 168, 168
sum_float, **98, 95**
suite, **124, 100, 99, 95**, 182
string_of_path, ??, ??
string_of_node, ??, ??
STRING (camlyacc token), **161**,
163, 163, 162
STRING, ??, ??, 159
steps, **109**, 110, 109
STAR (camlyacc token), **161**, 164,
164
STAR, ??, ??, 159
soft_truncate, **93**, 94
smooth_grid, **168**, 168
Smooth (camlyacc token), **161**, 163
Smooth, ??, **155, 158**, ??, 163, 159
smooth (field), **154, 156**, 168, 168,
157
smooth, **137**, 168
Slice2, **154, 156**, ??, 164
Slice1, **154, 156**, ??, 164
SLASH (camlyacc token), **161**,
164
SLASH, ??, ??, 159
skip_if, ??, ??
Skip (exn), ??
size, **98**
side (camlyacc non-terminal), **164**,
163
side (type), **155, 158**, 155, 158
shared_map_binary_file, **149, 152**
SetTestPath (module), ??, ??
SetMake (module), ??
Set (module), ??, 168, ??
scan_string, **175**, 177, 175
scale2 (field), **154, 156**, 168, 157
scale1 (field), **154, 156**, 168, 157
Scale (camlyacc token), **161**, 163,
163
Scale, ??, **155, 158**, ??, 163, 159
S (sig), ??, ??
S (module), **168**, 168
run_test_tt_main, ??
run_test_tt, ??, 182, ??
RTodo, ??, ??
RSuccess, ??, ??
RSkip, ??, ??
RPAREN (camlyacc token), **161**,
166, 165
RPAREN, ??, ??, 159

Roots (camlyacc token), **161**, 163
Roots, **??**, **155**, **158**, **??**, 163, 159
roots (field), **154**, **137**, **157**, 180, 168, 157
right (camlyacc non-terminal), **165**, 165
RFailure, **??**, **??**
rev_list_of_ascii_channel, **151**, 152
rev_concat, **151**, 152
result_path, **??**, **??**
result_msg, **??**, **??**
result_flavour, **??**, **??**
resonance_params (camlyacc non-terminal), **166**, 166
resonancemap, **118**, 118, 118
Resonance (camlyacc token), **161**, 164
Resonance (module), **107**, **116**, 181, 181, 122
Resonance, **??**, **??**, 159
resonance (camlyacc non-terminal), **166**, 164
resonance, **119**, **122**, **120**, **??**, 166, 122
rescale, **149**, **153**, 168
RError, **??**, **??**
report, **168**, 168
regression_moments (type), **172**
regression_interval, **178**, 179
regression_data, **179**, 182
Regression, **181**, 182
regression, **169**, **173**, 178
Rect, **154**, **156**, **??**, 164
record_regression, **173**, 173
record, **169**, **136**, **122**, **170**, 176, 175, 175
Rebinning_failure (exn), **123**
rebin, **137**, **123**
real_interval (camlyacc non-terminal), **165**, 166, 166, 165, 165
Real (sig), **119**, **105**, **119**, **108**, 124, 124, 119, 107, 107, 106, 106, 106, 106, 120, 108, 108
read_lines, **150**, 151
read_floats, **150**, 151
read, **174**, 174, 174
RBRACKET (camlyacc token), **161**, 166, 165, 165
RBRACKET, **??**, **??**, 159
RBRACE (camlyacc token), **161**, 164, 163, 162, 162
RBRACE, **??**, **??**, 159
RANGLE (camlyacc token), **161**, 166, 165
RANGLE, **??**, **??**, 159
random_interval, **181**, 181
raises, **??**, **??**
process_design, **168**, 168
process_channel, **168**, 168
prerequisites, **168**, 168
pp_print_sep, **??**, **??**
pp_print_gen, **??**, **??**
pp_printer, **??**, **??**
pp_diff, **??**, **??**
pp_comma_separator, **??**
power_params (camlyacc non-terminal), **166**, 166
power_map, **179**, 179
power_data, **179**, 182
powermap, **115**, 116, 116
Power (camlyacc token), **161**, 164
Power (module), **107**, **114**, 181, 181, 179, 179, 121
Power, **181**, **??**, 182, **??**, 159
power (camlyacc non-terminal), **166**, 164
power, **119**, **121**, **120**, **??**, 166, 121

Positron (camlyacc token), **161**, 164
Positron, **??**, **??**, 159
Poly (sig), **124**, 124, 124
Poly (module), **124**
polarization (camlyacc non-terminal), **164**, 163
pol2 (field), **154**, **137**, **156**, 180, 168, 157
pol1 (field), **154**, **137**, **156**, 180, 168, 157
Pol (camlyacc token), **161**, 163
Pol, **??**, **155**, **158**, **??**, 163, 159
point (camlyacc non-terminal), **165**, 164
point (type), **153**, **156**, 154, 156
PLUS (camlyacc token), **161**, 167
PLUS, **??**, **??**, 159
pid2 (field), **154**, **137**, **156**, 180, 168, 157
pid1 (field), **154**, **137**, **156**, 180, 168, 157
Pid (camlyacc token), **161**, 163
Pid, **??**, **155**, **158**, **??**, 163, 159
Photon (camlyacc token), **161**, 164
Photon, **??**, **??**, 159
phi (field), **120**, **116**, **114**, **112**, **111**, 122, 121, 121, 121, 121, 120, 118, 116, 113, 112
phi, **105**, **120**, **118**, **116**, **113**, **112**, **108**, 122, 121, 121, 121, 121, 110, 109, 109
perform_test, **??**, **??**
path (type), **??**, **??**
passed, **182**, 182, 182
particle (camlyacc non-terminal), **164**, 163
parse_string, **168**, **168**, 182
parse_file, **168**, **168**, 182
parse_error, **??**, **161**, **??**
Parser (module), **??**, **161**, **??**, 159, 168
overflow2 (field), **169**, 171, 170, 170
overflow (field), **169**, 171, 170, 170
Out_of_range (exn), **136**, **123**
Out_of_bounds (exn), **100**, **95**
output_float_little_endian, **94**
output_float_big_endian, **94**
output_file (type), **174**
OUnitDiff (module), **??**
OUnit (module), **??**, 182, 124, 100, 99, 95, **??**
Open, **153**, **156**, **??**, 166, 165
of_list, **??**, 177, 177, **??**
of_binary_file, **149**, **152**, 177, 176, 174, 168
of_bigarray, **137**, 180, 168
of_ascii_file, **149**, **152**, 174, 168
of_ascii_channel, **149**, **152**, 174, 174, 152
n_underflow (field), **169**, 171, 170, 170
n_overflow (field), **169**, 171, 170, 170
n_bins_float (field), **169**, 173, 172, 171, 171, 170, 170
n_bins (field), **169**, 173, 172, 171, 171, 170
n_bins, **123**
null_bins, **123**
Null (camlyacc token), **161**, 164
Null (module), **106**, **112**, 121
Null, **??**, **??**, 159
null (camlyacc non-terminal), **165**, 164
null, **119**, **121**, **119**, **??**, 165, 121
Notriangle (camlyacc token), **161**, 163
Notriangle, **??**, **??**, 159
Nothing, **181**, 182

normalize_ascii_floats, ??, ??
normalize, **169**, **137**, **171**, 179, 176
node (type), ??, ??
next_float, **149**, **150**, 175
name (field), **155**, **137**, **158**, 180, 168, 158
n (field), **172**, **169**, 173, 173, 172, 171, 171, 170, 170
Muon (camlyacc token), **161**, 164
Muon, ??, ??, 159
Mono (sig), **123**, 123
Mono (module), **123**, 180
moments_data, **178**, 182
moments_binary, **177**, 182
moments_ascii, **177**, 182
Moments, **181**, 182
moment, **178**, 178
MINUS (camlyacc token), **161**, 167
MINUS, ??, ??, 159
Minmax, **155**, **158**, ??, 164
Min (camlyacc token), **161**, 164, 163
Min, ??, **155**, **158**, ??, 164, 159, 168
maybe_backtrace, ??, ??
Max (camlyacc token), **161**, 164, 163
Max, ??, **155**, **158**, ??, 164, 159, 168
map_xy, **174**, 175
map_array2, **150**, 153, 152, 152, 151
Maps (module), ??, **161**, **168**, ??, 166, 166, 165, 165, 168
mapi, ??, ??
Map (camlyacc token), **161**, 163
Map, ??, ??, 159
map (camlyacc non-terminal), **164**, 163
map, **98**, **95**, 179, 178, 177, 177, 176, 175, 175, 171, 168, ??
make_test_data, **180**, 180
Make_Test (module), **106**, **108**, 181
Make_Poly (module), **124**, 168
Make (module), **138**, 180, 168, 168, ??
main (camlyacc non-terminal), **162**, 162
main, ??, 168
M (module), **124**, **106**, **108**, **108**, 124, 106, 108
Lumi (camlyacc token), **161**, 163
Lumi, ??, **155**, **158**, ??, 163, 159
lumi (field), **154**, **137**, **156**, 180, 168, 157
LPAREN (camlyacc token), **161**, 165, 165
LPAREN, ??, ??, 159
lower (camlyacc non-terminal), **165**, 165
lower (camllex regexpr), **159**, 159
log10_xy, **175**, 182
Log10, **181**, 182
little_endian, **93**
ListSimpleMake (module), ??
ListItem, ??, ??
linear_regression, **173**, 173
linearmap, **113**, 113, 113
Linear (module), **106**, **112**
Lexer (module), ??, **159**, 168
left (camlyacc non-terminal), **165**, 165
LBRACKET (camlyacc token), **161**, 165, 165, 165
LBRACKET, ??, ??, 159
LBRACE (camlyacc token), **161**, 164, 163, 162, 162
LBRACE, ??, ??, 159

LANGLE (camlyacc token), **161**,
 165, 165
LANGLE, **??**, **??**, 159
Label, **??**, **??**
jacobian, **106**, **110**, **108**, 110
jac (field), **120**, **116**, **114**, **112**,
 111, 122, 121, 121, 121, 120,
 118, 116, 113, 112
jac, **105**, **120**, **118**, **116**, **113**, **112**,
 108, 122, 121, 121, 121, 110
Iterations (camlyacc token), **161**,
 163
Iterations, **??**, **155**, **158**, **??**, 163,
 159
iterations (field), **154**, **156**, 168,
 157
iter, **98**, **95**, 179, 179, 178, 176,
 176, 175, 175, 168, **??**
is_todo, **??**, **??**
is_success, **??**
is_skip, **??**, **??**
is_null (field), **120**, 122, 121, 121,
 121, 120
is_null, **123**, **105**, **120**, **118**, **116**,
 113, **112**, **112**, **108**, 122,
 121, 121, 121
is_failure, **??**, **??**
is_error, **??**, **??**
inverse, **106**, **109**, **108**, 110
Invalid_interval (exn), **167**, **168**
int_or_float (type), **93**
intervals2 (field), **154**, **156**, 168,
 157
intervals1 (field), **154**, **156**, 168,
 157
intervals, **179**, **178**, 179
interval (camlyacc non-terminal),
 165, 164
interval (type), **154**, **156**, 154, 156
INT (camlyacc token), **161**, 167,
 166, 166, 166, 165, 165, 165,
 165, 164, 164, 164, 163, 163
INT, **??**, **??**, 159
Int, **93**, 182, 93
input_float_little_endian, **94**, 94
input_float_big_endian, **94**
input_file (type), **174**
input_binary_floats, **92**, **94**, **92**
input_binary_float, **92**, **94**, **92**,
 175, 94
init_regression_moments, **172**, 173
Incomplete (exn), **150**
ihp (field), **120**, **116**, **114**, **112**,
 111, 122, 121, 121, 121, 120,
 118, 116, 113, 112
ihp, **105**, **120**, **118**, **116**, **113**,
 112, **108**, 179, 122, 121, 121,
 121, 110, 109, 109
idmap, **111**, 111, 111
Id (camlyacc token), **161**, 164
Id (module), **106**, **110**, 121, 112
Id, **??**, **??**, 159
id (camlyacc non-terminal), **165**,
 164
id, **119**, **121**, **119**, **??**, 166, 165,
 121
histogram_data, **176**, 182
histogram_binary_channel, **175**,
 182
histogram_binary, **176**, 182
histogram_ascii, **175**, 182
Histogram (camlyacc token), **161**,
 163
Histogram (module), **169**, **169**,
 182, 179, 178, 176, 176, 175,
 175
Histogram, **??**, **155**, **158**, **??**, 163,
 159
histogram (field), **154**, **156**, 168,
 157
Histo, **181**, 182

Grid (module), **180, 136, 168,**
138, 180, 180, 180, 168, 168,
168
global_verbose, **??, ??**
gaussian, **100**
g (field), **137, 180, 168**
Free (camlyacc token), **161, 163**
Free, **??, ??, 159**
format (type), **181, 181**
fold_lefti, **??, ??**
fold_left, **98, 95, 171, 168, 168,**
151, ??
fmt, **178, 178, 178**
float_or_int (camlyacc
non-terminal), **167, 167**
float_min_int, **93, 93**
float_max_int, **93, 93**
float_list_of_string, **??**
float_array_of_string, **??**
FLOAT (camlyacc token), **161,**
167
FLOAT, **??, ??, 159**
Float (module), **92, 92, 175, 170,**
117, 114
Float, **93, 182, 93**
float (camlyacc non-terminal), **167**
fixed_x2_min (field), **154, 156,**
168, 157
fixed_x2_max (field), **154, 156,**
168, 157
fixed_x1_min (field), **154, 156,**
168, 157
fixed_x1_max (field), **154, 156,**
168, 157
Fix (camlyacc token), **161, 163**
Fix, **??, 155, 158, ??, 163, 159**
find, **122**
Filter (module), **100, 100, 182**
file_prerequisites, **168, 168**
file_cmds (camlyacc non-terminal),
162, 162, 162
file_cmds (type), **156, 159, ??, 162**
file_cmd (camlyacc non-terminal),
162, 162
file_cmd (type), **156, 159, 156,**
159
files (camlyacc non-terminal), **162,**
162, 162
File (camlyacc token), **161, 162**
File, **??, 156, 159, ??, 162, 159**
file (camlyacc non-terminal), **162,**
162
file (type), **155, 158, 155, 155, 158**
file, **168, 168**
exp_e (camllex regexpr), **??, ??**
exp_d (camllex regexpr), **??, ??**
exp10_xy, **175, 182**
Exp10, **181, 182**
execute, **168, 168, 182**
Events_lexer (module), **??, 150,**
150
Events (camlyacc token), **161, 163**
Events (module), **149, 149, 177,**
176, 175, 174, 174, 174, 168
Events, **??, 155, 158, ??, 163, 159**
events (field), **154, 156, 168, 157**
Eta (camlyacc token), **161, 166**
Eta, **??, ??, 159**
eta (camlyacc non-terminal), **166,**
166
eta (label), **119, 107, 107, 122,**
121, 120, 118, 118, 117,
116, 115, 114, 118, 116
eta (field), **116, 114, 118, 117,**
116, 114
EStart, **??, ??**
EResult, **??, ??**
EQUALS (camlyacc token), **161,**
167, 166, 166, 166, 163, 163,
162
EQUALS, **??, ??, 159**

epsilon, **153, 92, 156, 109, 93,**
92, ??, 167, 170, 109, 93
END (camlyacc token), **161, 162**
END, **??, ??, 159**
encode (field), **120, 122, 121, 121,**
121, 120
encode, **105, 120, 117, 114, 112,**
111, 108, 122, 121, 121, 121
Electron (camlyacc token), **161,**
164
Electron, **??, ??, 159**
EEnd, **??, ??**
e (type), **??, ??**
Double (module), **92, 92, 175, 170,**
117, 114
domain (type), **104, 120, 116,**
114, 112, 111, 108, 119,
119, 119, 107, 107, 107, 106,
106, 105, 105, 105, 105, 105,
104, 120, 120, 119, 119, 116,
114, 112, 111, 108, 108, 108,
108
domain, **106, 109, 108, 110**
Division (module), **122, 124, 182,**
180, 138, 136, 168
Div (module), **180, 168, 180, 180,**
168, 168
digit (camllex regexpr), **??, 159,**
??, 159
diff_moment, **178, 178**
DIFF_ELEMENT (sig), **??, ??**
Diffmaps (module), **119, 119, ??,**
161, 155, 154, 124, 124, 168,
158, 156
Diffmap (module), **104, 108, 181,**
181, 179, 179, 119, 122, 121,
121, 121, 119
Diffmap, **155, 158, ??, 163**
diff, **109, 110, 109, 109, ??**
design_to_channel, **138, 168**
design_scale2 (field), **154, 157,**
168, 157, 157
design_scale1 (field), **154, 157,**
168, 157, 157
Design_Scale, **155, 158, ??, 163**
design_prerequisites, **168, 168**
design_cmds (camlyacc
non-terminal), **163, 163,**
162
design_cmd (camlyacc
non-terminal), **163, 163**
design_cmd (type), **155, 158, 156,**
159
design_bins2 (field), **154, 157,**
168, 157, 157
design_bins1 (field), **154, 157,**
168, 157, 157
Design_Bins, **155, 158, ??, 163**
designs_to_file, **138, 180**
designs_to_channel, **138**
Designs, **156, 159, ??, 162**
designs (field), **155, 158, 168, 158**
Design (camlyacc token), **161, 163**
Design, **??, 155, 158, ??, 163, 159**
design (type), **154, 137, 157, 155,**
155, 155, 138, 158
design (field), **154, 157, 168, 157**
design, **168, 168**
derive, **109, 110**
Delta, **153, 156, ??, 165**
default_file, **155, 158, 168**
default_design, **155, 157, 168**
default_channel, **155, 157, 168**
Default (sig), **119, 119, 119**
Default (module), **119, 120, ??,**
161, 155, 154, 168, 158, 156
decode_sup, **95**
decode_inf, **95**
D (module), **136, 136**
create_array, **151, 151**

create, **169, 136, 124, 123, 107, 107, 107, 106, 106, 170, 118, 116, 113, 111, 181, 180, 180, 179, 176, 175, 175, 168, 151, 151, 122, 121, 121, 121, ??**
copy, **136, 122, 98, 95, 171**
coord (camlyacc non-terminal), **164, 163, 163**
coord (type), **155, 158, 155, 155, 158, 158**
compare, **??, 168, ??, 168, ??**
comments (field), **154, 137, 157, 180, 168, 157**
Comment (camlyacc token), **161, 163**
Comment, **??, 155, 158, ??, 163, 159**
Command_file, **181, 182**
Commands (module), **167, 168, 182**
Commands, **181, 182**
COMMA (camlyacc token), **161, 165, 165**
COMMA, **??, ??, 159**
Columns (camlyacc token), **161, 163**
Columns, **??, 155, 158, ??, 163, 159**
columns (field), **154, 156, 168, 157**
codomain (type), **104, 120, 116, 114, 112, 111, 108, 119, 119, 119, 107, 107, 107, 106, 106, 105, 105, 105, 105, 104, 120, 120, 119, 119, 116, 114, 112, 111, 108, 108, 108**
cmp_float, **??**
closure, **117, 114, 112, 111, 118, 115, 113, 111**
Closed, **153, 156, ??, 166, 165**
Circe2_tool (module), **174**
char (camllex regexpr), **159**
channel_prerequisites, **168, 168**
channel_cmds (camlyacc non-terminal), **163, 163, 163**
channel_cmd (camlyacc non-terminal), **163, 163**
channel_cmd (type), **155, 158, 155, 158**
Channels, **155, 158, ??, 163**
channels (field), **154, 137, 157, 180, 168, 157**
channel (type), **154, 137, 156, 155, 154, 137, 137, 157**
channel, **168, 168**
Center (camlyacc token), **161, 166**
Center, **??, ??, 159**
center (camlyacc non-terminal), **166, 166**
Cat, **181, 182**
cat, **174, 182**
caj (field), **120, 116, 114, 112, 111, 122, 121, 121, 121, 120, 118, 116, 113, 112**
caj, **123, 105, 120, 118, 116, 113, 112, 108, 122, 121, 121, 121, 110**
buff_printf, **??, ??**
bracket_tmpfile, **??, ??**
bracket, **??, ??**
Box, **153, 156, ??, 165**
boundary (type), **153, 156, 154, 156**
bins2 (field), **154, 156, 168, 157**
bins1 (field), **154, 156, 168, 157**
Bins (camlyacc token), **161, 163, 163**
Bins, **??, 155, 158, ??, 163, 159**
bins, **123**
Binary_outf, **174, 182**
Binary_inf, **174, 182**

Binary (camlyacc token), **161**, 163
Binary, **181**, **??**, **155**, **158**, 182,
 ??, 163, 159
binary (field), **154**, **156**, 168, 157
Bin, **153**, **156**, **??**, 166, 165
Beta (camlyacc token), **161**, 166
Beta, **??**, **??**, 159
beta (camlyacc non-terminal), **166**,
 166
Below_min (exn), **123**
b (label), **117**, **114**, **112**
b (field), **116**, **114**, **112**, 117, 114
as_bins_to_file, **169**, **172**, 182
as_bins_to_channel, **169**, **172**, 172
assert_string, **??**
assert_raises, **??**
assert_failure, **??**, **??**
assert_equal, **??**, **??**
assert_command, **??**
assert_bool, **??**, **??**
ASCII_outf, **174**, 182
ASCII_oc, **174**, 182
ASCII_inf, **174**, 182
ASCII_ic, **174**, 182
ASCII, **181**, 182
Ascii (camlyacc token), **161**, 163
Ascii, **??**, **??**, 159
area (camlyacc non-terminal), **164**,
 163
area (type), **154**, **156**, 155, 154,
 137, 137, 137, 158, 156
apply2, **100**
apply12, **100**
apply1, **100**
apply, **100**
Antimuon (camlyacc token), **161**,
 164
Antimuon, **??**, **??**, 159
alpha (label), **119**, **107**, **121**, **120**,
 116, **115**, **114**, 179, 116
alpha (field), **114**, 116, 114
all, **106**, **110**, **108**, 181
action (type), **181**
Above_max (exn), **123**
a (label), **119**, **107**, **122**, **120**,
 118, **118**, **117**, **114**, **112**,
 118
a (field), **116**, **114**, **112**, 118, 117,
 114
@?, **??**
?x_min (label), **119**, **119**, **107**,
 107, **107**, **106**, **106**, **122**,
 121, **121**, **121**, **120**, **119**,
 118, **116**, **113**, **111**, 122,
 121, 121, 121
?x_max (label), **119**, **119**, **107**,
 107, **107**, **106**, **106**, **122**,
 121, **121**, **121**, **120**, **119**,
 118, **116**, **113**, **111**, 122,
 121, 121, 121
?verbose (label), **137**, **??**
?use_stderr (label), **??**
?triangle (label), **136**
?tolerance (label), **109**
?sup2 (label), **100**, **98**
?sup1 (label), **100**, **98**
?sup (label), **100**, **95**, **95**, **95**
?suffix (label), **??**
?skip (label), **??**
?set_verbose (label), **??**
?printer (label), **??**
?prefix (label), **??**
?pp_diff (label), **??**
?power (label), **137**, **137**, **123**
?msg (label), **??**, **??**
?mode (label), **??**, **??**
?margin (label), **137**
?iterations (label), **137**
?inf2 (label), **100**, **98**
?inf1 (label), **100**, **98**
?inf (label), **100**, **95**, **95**, **95**
?fixed_x2_min (label), **137**, **137**

?fixed_x2_max (label), **137, 137**
?fixed_x1_min (label), **137, 137**
?fixed_x1_max (label), **137, 137**
?fixed_min (label), **123**
?fixed_max (label), **123**
?file (label), **149, 152, 152, 151,**
151, 152, 152, 151
?exit_code (label), **??**
?epsilon (label), **??**
?env (label), **??**
?cutoff (label), **137**
?comments (label), **138**
?cmp (label), **??**
?chunk (label), **149, 152, 152, 152**
?bias (label), **124, 123**
?arg_specs (label), **??**
?areas (label), **137**
>:::, **??, 182**
>::, **??**
>:, **??**